



TEG-S2400i **24-Port 10/100Mbps SNMP Switch with Gigabit Module Slot**

TRENDnet's TEG-2400i is a high performance web-managed SNMP Layer 2 Switch that provides users with 24 10/100Mbps Fast Ethernet ports and one Gigabit module slot. The module slot accepts either copper or fiber media module, which offers connection to Gigabit Server or Gigabit backbone with flexibility. With the Web Browser configuration feature, users can easily install and configure the Switch. The TEG-S2400i supports both Port-Based and Tag-Based VLAN, and the trunking feature delivers more bandwidth than regular uplink between Switches. TRENDnet's TEG-S2400i is powerful and easy-to-use in reducing unnecessary broadcast traffic and enhancing network security.



FEATURES

- 24 10/100Mbps Auto-Negotiation Ethernet/Fast Ethernet Ports
- Gigabit Module Slot; supports the following optional Modules: 1-Port 100Base-FX, 2-Port 100Base-FX, 2-Port Copper Gigabit, 1-Port Fiber Gigabit, or 2-Port Fiber Gigabit
- Full/Half-duplex transfer mode for each 10/100Mbps port (1000Mbps port supports only at full-duplex mode)
- Auto-MDIX media type detection for all ports
- Supports store-and-forward switching architecture with non-blocking wire-speed performance
- IEEE 802.3x flow control for full-duplex and collision-based back pressure function for half-duplex operation
- 14K MAC addresses and 4K VLAN entries per device
- 3MB packet buffer and 1MB control buffer per device
- Broadcast storm filtering and Head-of-Line blocking prevention
- Supports Port-Based VLAN (26 Groups), IEEE 802.1Q Tag-Based VLAN, and IEEE 802.1P Port-Based Quality of Service (QoS)
- Supports Port-Trunking (7 trunk groups with maximum of 4 ports per group)
- Supports IP Multicast, IGMP Snooping, and RMON Group 1,2,3,9
- Configuration via Console Port (serial cable included), SNMP, Telnet, and Web Browser
- Extensive front panel diagnostic LEDs
- 19" Rack Mountable
- 5-Year Warranty

BENEFITS

- **Performance:**
Provides Gigabit Module Slot for 100Base-FX or Copper/Fiber Gigabit connection.
- **Flexibility:**
Connects to 10Base-T, 100Base-TX, 100Base-FX, 1000Base-T, and 1000Base-SX networks (with optional module).
- **Expandability:**
Simple expansion by uplinking to 10/100Mbps or Gigabit Switches. Trunking feature increases throughput between Switches within the network.
- **Cost Effectiveness:**
Provides SNMP management and Gigabit Performance at an affordable price.
- **Security:**
Port-based VLAN to further segmenting the network.

TEG-S2400i

24-Port 10/100Mbps SNMP Switch with Gigabit Module Slot

SPECIFICATIONS

Standards:

- IEEE 802.3 10Base-T Ethernet, IEEE 802.3u 100Base-TX/100Base-FX Fast Ethernet, IEEE 802.3ab 1000Base-T/1000Base-SX Gigabit Ethernet, ANSI/IEEE 802.3 Auto-Negotiation, IEEE 802.3z 1000BaseSX/LX Gigabit Ethernet, IEEE 802.3x Full-Duplex Flow Control, IEEE 802.1D Spanning Tree, IEEE 802.1P QoS, IEEE 802.1Q VLAN, IEEE 802.1v port-based VLAN

Data Transfer Rate:

- Ethernet: 10Mbps (Half-Duplex), 20Mbps (Full-Duplex),
- Fast Ethernet: 100Mbps (Half-Duplex), 200Mbps (Full-Duplex),
- Gigabit Ethernet: 2000Mbps (Full-Duplex)

Console Port:

- RS-232, female 9-Pin Serial Port (DB-9 male-to-female serial cable included)

Protocol:

- CSMA/CD

Topology:

- Star

Cabling:

- Ethernet: UTP/STP Cat. 3,4,5, EIA/ITA-568 100-ohm, 100 meters max.
- Fast Ethernet: UTP/STP Cat. 5, EIA/TIA-568 100-ohm, 100 meters max.
 - 62.5/125um Multimode Fiber with SC-type connector, 2Km max.
- Gigabit Ethernet: UTP/STP Cat. 5, EIA/TIA-568 100-ohm, 100 meters max.
 - 62.5/125um Multimode Fiber with SC-type connector, 220 meters max.,
 - 50/125um Multimode Fiber with SC-type connector, 550 meters max.

Data RAM Buffers:

- 3MB Packet Buffer and 1MB Controller Buffer

Filtering Address Table:

- 14K entries per device

Diagnostic LEDs:

- Per Device: Power, Diagnostic, FAN1, FAN2
- Per Port: 100M, Link/Act

Power Consumption:

- 100 ~ 240 VAC, 50 ~ 60Hz, Internal Universal Power Supply

Dimensions:

- 440 x 184 x 44mm (17.3 x 7.3 x 1.8 inch) (W x H x D)

Weight:

- 2.3 Kg. (5.1 lb.)

Temperature:

- Operating: 5° ~ 45° C (41° ~ 113° F)
- Storage: -20° ~ 70° C (-4° ~ 158° F)

Operating Humidity:


- 10% ~ 90% non-condensing

Certifications:

- CE, FCC



NETWORKING SOLUTIONS

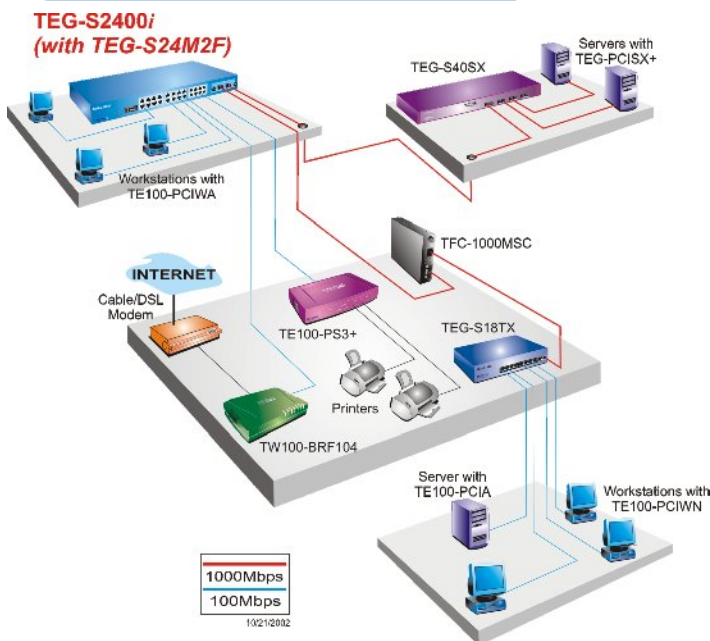

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- **TEG-S2400i**: 24-Port 10/100Mbps SNMP Switch with Gigabit Module Slot

Option Gigabit Modules for TEG-S2400i:

- **TEG-S24M2G**: 2-Port Copper Gigabit Module
- **TEG-S24M1F**: 1-Port Multimode SC-type Fiber Gigabit Module
- **TEG-S24M2F**: 2-Port Multimode SC-type Fiber Gigabit Module
- **TEG-S24M100F**: 1-Port Multimode SC-type 100Base-FX Module
- **TEG-S24M200F**: 2-Port Multimode MT-RJ 100Base-FX Module
- **TEG-S24M11GF**: (1-Port 10/100/1000Mbps Copper Gigabit + 1-Port 1000Base-SX multimode SC type Module)
- **TEG-S224M**: 22-Port 10/100/1000Mbps Management Stackable Fast Ethernet Master Switch
- **TEG-S224S**: 24-Port 10/100Mbps Management Stackable Fast Ethernet Slave Switch

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

TRENDnet
TRENDware, USA