



TE100-S88FX **8-port 100Base-FX Switch with SC Connector**

TRENDnet's TE100-S88FX is an 8-port 100Base-FX Switch with SC Connector best for campus and networks that require greater distance than the standard 100 meters copper wire. Furthermore, it offers reliable, easy-to-use, and affordable LAN solution to meet an immediate network bandwidth demand. With unique Fast Ethernet Switching ASIC, TRENDnet's TE100-S88FX delivers the power of 100Mbps switching at a very economical price.



FEATURES

- ...→ Supports half- and full-duplex modes on all the ports (Dip-switch controlled)
- ...→ Supports store-and-forward
- ...→ Plug and Play
- ...→ Address filtering on all the ports
- ...→ Front panel LEDs for switch operation status and troubleshooting
- ...→ True non-blocking switch architecture
- ...→ Supports 1,024 MAC address entries per device
- ...→ Supports 1,024 MAC address entries per device
- ...→ Back pressure flow control for half duplex mode
- ...→ 5 Year Warranty

BENEFITS

- ...→ **Performance:**
Support the centralized fiber application.
- ...→ **Flexibility:**
The TE100-S86FX seamlessly connects 10/100Base-TX and 100Base-FX.
- ...→ **Expandability:**
Offers FX fiber ports for distance expansion for longer than 100 meters.
- ...→ **Compatibility:**
Support all major network operating systems.
- ...→ **Reliability:**
The TE100-S86FX/S88FX are dependable with a 5 year warranty.

TE100-S88FX

8-port 100Base-FX Switch with SC Connector

SPECIFICATIONS

Standards:

- IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX/FX

Cable:

- 10Base-T 2-pair UTP CAT 3, 4, 5 up to 100 meters (328 ft.)
- 100Base-TX 2-pair UTP CAT 5 up to 100 meters (328 ft.)
- 100Base-FX 62.5/125 Multi-mode fiber optics cable up to 2,000 meters (6,560 ft.)

Switching Method:

- Store-and-forward

Forwarding Rate:

- 14,880 pps for 10Mbps, 148,800 pps for 100Mbps

AC Input:

- 100-250VAC, 47-63Hz internal power supply

Power Consumption:

- 22W

Temperature:

- Operating Temp.: 0° to 40° C (32° to 104° F)
- Storage Temp.: -25° to 70° C (-13° to 158° F)

Humidity:

- 10 % to 90 % non-condensing

Dimensions:

- 440 x 205 x 45 mm (17.3 x 8 x 1.8 inches)

Weight:


- 2,500 grams (5.5 lbs.)

Certifications:

- FCC, CE, VCCI, UL



NETWORKING SOLUTIONS

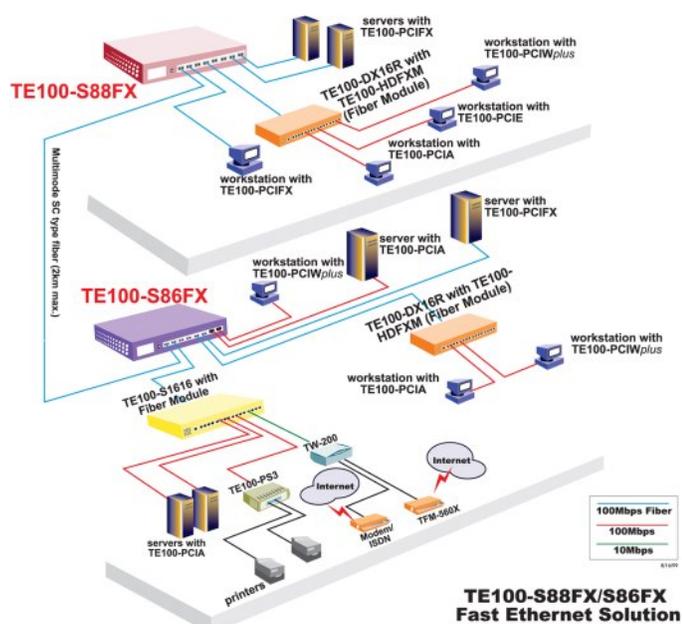

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- ❖ **TE100-S81FX:** 7-port 10/100Base-TX and 1-port 100Base-FX Mini Switch with SC Connector
- ❖ **TE100-S86FX:** 2-port 10/100Base-TX and 6-port 100Base-FX Switch with SC Connector
- ❖ **TE100-S88FX:** 8-port 100Base-FX Switch with SC Connector
- ❖ **TFC-100MSC:** 100Base-TX to 100Base-FX SC-type Converter
- ❖ **TE100-PCIFX:** 100Base-FX Fast Ethernet Adapter for PCI

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA