



TK-209i 2-Port USB and PS/2 KVM Switch with Audio

TRENDnet's TK-209i 2-Port USB and PS/2 KVM Switch with Audio & Microphone Kit lets you control one PS/2 and one USB enabled multimedia PCs with just one keyboard, monitor, mouse, microphone, and a set of speakers. TK-209i not only allows you to share your monitor, keyboard and mouse but you can also share microphone and speakers. With just a simple press of a button, this KVM switch eliminates the hassle of cable swapping and switching between 2 PCs. With it's Hot-Plug, Auto-Scan, and Hot-Key operating features, the TK-209i is the perfect choice for managing 2 PCs.



FEATURES

- ... Use one keyboard, monitor, and mouse to control two computers
- ... USB Keyboard/Mouse emulation
- ... 2-Port USB and PS/2 KVM Switch in Compact size design
- ... Includes two sets of USB or PS/2, VGA and Audio & Microphone cables
- ... Supports Microsoft Intellimouse, Optical Mouse, Logitech Net Mouse and more
- ... Supports Windows 98/98SE/ME/2000/XP/2003 Server, Linux and MAC OS
- ... Multi-platform support for PCs, Macintosh G3 / G4 and iMac
- ... Supports High Video Quality, up to 1920 x 1440 VGA resolution
- ... Hot-Plug feature, add PCs or remove connected PCs for maintenance without powering down the KVM switch or other PCs
- ... No software required, easy PC selection via Push Button or Hot-Key Commands
- ... Auto-Scan Mode for monitoring PCs
Keyboard status restored when switching between PCs
- ... LED display for easy status monitoring
- ... USB or PS/2 Interface Powering Method
- ... 1-Year Warranty

BENEFITS

- ... **Integration Friendly:** Does not require driver/software for installation and operation. Switch between PCs with Hot-Key operation.
- ... **Flexible:** Hot-Plug feature, add PCs or remove connected PCs without powering off the KVM switch or the other PCs.
- ... **Cost Effective:** Manage two PCs with a single keyboard, monitor, mouse and speakers/microphone. Save on equipment cost, utility, and space.
- ... **Performance:** Supports High Video Resolution of up to 1920 x 1440. Keyboard status is saved for each PC.



TK-209i

2-Port USB and PS/2 KVM Switch with Audio

SPECIFICATIONS

USB Interface:

- USB 1.1 Specifications Compliant

KVM Cable:

- 2 sets of 1.5M (4.8ft) KVM Cables are integrated into the unit

KVM Cable Connectors:

- 1 x USB Type A
- 1 x PS/2 keyboard 6-pin Mini Din male
- 1 x PS/2 mouse 6-pin Mini Din male
- 2 x VGA HDB 15-pin male
- 2 x 3.5mm audio in/out jack
- 2 x 3.5mm microphone in/out jack

Console Port Connectors:

- 1 x PS/2 keyboard 6-pin Mini Din female
- 1 x PS/2 mouse 6-pin Mini Din female
- 1 x VGA HDB 15-pin female
- 1 x 3.5mm audio in/out jack
- 1 x 3.5mm microphone in/out jack

Port Selection:

- Push Button and Hot-Key Commands

Auto-Scan Intervals:

- 10 seconds

Power Type:

- PS/2, USB Interface Power

Dimensions (LxWxH):

- 450mA ~ 500mA max

Dimensions:

- 85 x 65 x 28 mm
(3.35 x 2.56 x 1.10 inches)

Weight:

- Appro. 160 g. (5.64 Oz.)

Temperature:

- Operating: 0° ~ 40°C (32° ~ 104° F)
- Storage: -20° ~ 60°C (-4° ~ 140° F)

Humidity:


- 0%~90% RH, Non-Condensing

Certifications:

- FCC, CE



NETWORKING SOLUTIONS

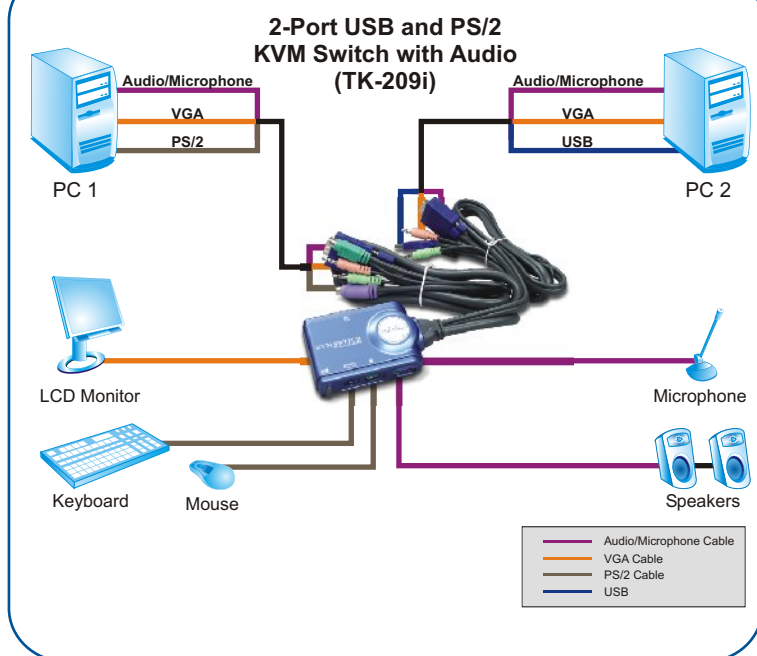

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- ➔ TK-206i: 2-Port USB KVM Switch
- ➔ TK-205i: 2-Port KVM Switch with Integrated KVM Cables
- ➔ TK-209i: 2-Port USB and PS/2 KVM Switch with Audio
- ➔ TK-210K: 2-Port USB and PS/2 KVM Switch Kit with Audio
- ➔ TK-400K: 4-Port KVM Switch Kit
- ➔ TK-401R: 4-Port Rack Mount KVM Switch
- ➔ TK-801R: 8-Port Rack Mount KVM Switch
- ➔ TK-802R: 8-Port Stackable Rack Mount KVM Switch (With OSD)
- ➔ TK-1601R: 16-Port Rack Mount Switch

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

