



TU2-PCBUS **2-port USB 2.0 CardBus Adapter**

The TU2-PCBUS offers two High Speed USB 2.0 ports designed for adding the new USB technology to existing Laptop/Notebook Computers. Computer users can instantly enjoy the latest USB 2.0 devices with 480Mbps transfer speed. The TU2-PCBUS is also backward compatible with existing USB 1.1 devices for extended compatibility. The TU2-PCBUS features CardBus PC Card Type II interface for maximum data transfer throughput between the host PC and the USB devices. Installation is a snap with TU2-PCBUS Plug-n-Play functionality. Additional USB 2.0 ports can be obtained by using the TU2-400, 4-port High Speed USB 2.0 hub, the ideal companion for the TU2-PCBUS.



FEATURES

- 32-bit CardBus PC Card type II interface
- USB 2.0 specifications compliant and backwards compatible with USB 1.1
- Two USB 2.0 Ports
- Allows Simultaneous Operation of USB 1.1 and USB 2.0 Devices
- Supports high-speed (480Mbps), full-speed (12Mbps) and low-speed (1.5Mbps) data transfer modes
- Compatible with Windows 98SE/ME/2000/XP
- Plug-n-Play Installation
- Supports USB Hubs, Removable Drives, Digital Cameras, Scanners, CD-RW/DVD ROMs, PC Video Cameras, Printers, CF/SM/MMC/SD/Memory Stick Readers/Writers and more.
- 3-year warranty

BENEFITS

- **Compatibility:**
TU2-PCBUS is compatible with Windows 98SE/ME/2000/XP.
- **Flexibility:**
Supports both USB 2.0 Hi-Speed and USB 1.1 devices.
- **Installation:**
Easy installation with Plug-n-Play setup.
- **Speed:**
Supports 480Mbps High-Speed, 12Mbps Full-Speed, or 1.5Mbps Low-Speed USB operation mode.



TU2-PCBUS

2-port USB 2.0 CardBus Adapter

SPECIFICATIONS

Standard:

- USB Specification 1.1, and 2.0

Data Speed:

- High-Speed: 480 Mbps
- Full-speed: 12 Mbps
- Low-speed: 1.5 Mbps

Host Interface:

- 2-Port Hi-Speed USB 2.0 with Type-A Connectors.
- Support Suspend Power Saving mode

Driver Support:

- Windows 98SE/ME/2000/XP

Power Consumption:

- 3.3V DC, 1A max. (165mA @ idle)

Dimensions (WxHxD):

- 112 x 54 x 11 mm (4.4 x 2.13x 0.43 inches)

Weight:

- 40 g (1.4 oz.)

Temperature:

- Operating: 5° ~ 50° C (41° ~ 122° F)
- Storage: -10° ~ 60° C (14° ~ 140° F)

Operating Humidity:


- 20 % ~ 80 % non-condensing

Certifications:

- FCC, CE



NETWORKING SOLUTIONS

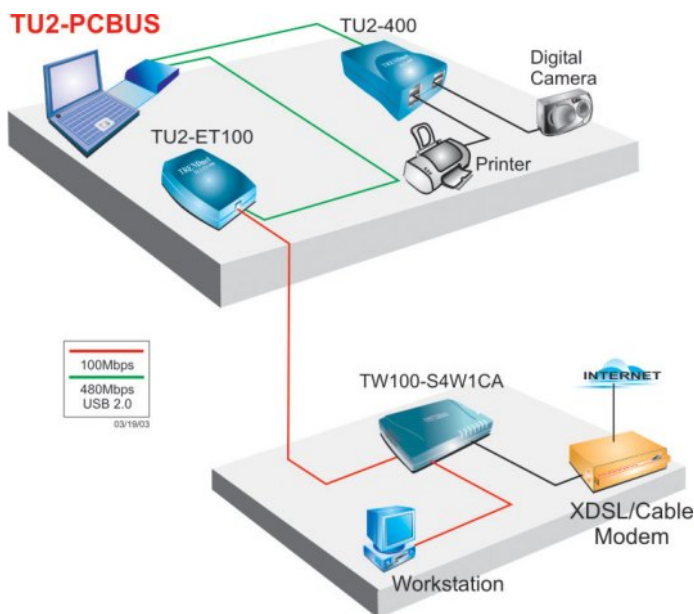

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- **TU2-ET100:** Hi-Speed USB to Fast Ethernet Adapter
- **TU2-400:** 4-port Hi-Speed USB Hub
- **TU2-PCBUS:** 2-port USB 2.0 CardBus Adapter

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA