



1-Port Multi-Function USB Print Server

TE100-MFP1 (v1.1R)

- Turn a multi-function or standard printer into a shared network resource
- Scan, fax, and print from any workstation
- Compact form factor
- Intuitive Utility supports Windows and Mac OS


TRENDnet's 1-Port Multi-Function USB Print Server, model TE100-MFP1, transforms most stand-alone multi-function and standard USB printers into a shared network resource. Install your multifunction printer in the most ergonomic location and then connect the compact TE100-MFP1 to a wired network.

An intuitive utility supports Windows and Mac operating systems and provides a seamless user experience. Scan, fax, and print functionality from any networked workstation. This compact device fits into the smallest spaces.

- 1 x 10/100Mbps Auto-MDIX Fast Ethernet port
- 1 x USB 2.0 high speed port
- Backwards Compatible with USB 1.1 Devices
- Control Center utility supports Windows 7 (32/64-bit) / Vista (32/64-bit) / Windows XP(32/64-bit) and Mac OS X 10.4/10.5/10.6/10.7 operating systems
- Supports most All-In-One multi-function printers and regular USB printers
- Share multi-function printers and regular USB printers over the network
- Control Center utility includes built in scan feature*
- Supports NetUSB technology*
- Share USB peripheral devices over the network including; digital cameras, web cams, speakers, iPods™, flash drives, external hard drives, printers, and memory card readers*
- Universal Plug & Play (UPnP) installation
- Diagnostic LEDs
- 3-year limited warranty

* Control Center utility installation required for each computer in order to access the print server

Networking Solution

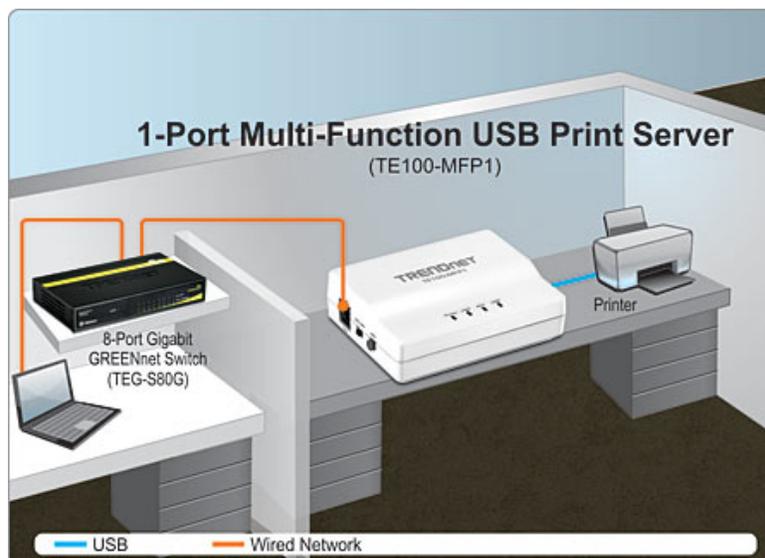

Specifications

Hardware

Standards

- IEEE 802.3 (10Base-T), IEEE 802.3u (100Base-TX), USB 1.1/2.0

LAN Port

- 1 x 10/100Mbps Auto-MDIX Ethernet port

USB Ports

- 1 x USB 2.0 Type-A

LED Indicators

- Power, Link, ACT, USB

TCP/IP Protocol Supported

- DHCP

Control Center Utility Supported OS

- Windows® 8.1, 8, 7, Vista, XP
- Mac OS® 10.4-10.9

USB Devices Supported

- 127 max.

Button

- Reset: restores factory default settings

Power

- Input: 120 ~ 240V AC, 50~60Hz
- Output: 5V DC, 1A

Power Consumption

- 1.9 Watts (max.)

Dimensions (LxWxH)

- 75 x 58 x 24mm (3 x 2.3 x 1 in.)

Weight

- 60 g (2.0 oz.)

Temperature

- Storage: -10 ~ 60°C (13.9~139 °F)
- Operating: 5 ~ 40°C (41~104 °F)

Humidity

- Max. 90% (non-condensing)

Certifications

- CE, FCC

Package Contents

- TE100-MFP1
- Multi-Language Quick Installation Guide
- CD-ROM (Utility & User's Guide)
- Power adapter (5V DC, 1A)
- Network cable (1.5 m / 5 ft.)

