



TE100-P1U(v2) 10/100Mbps USB 2.0 Print Server

TRENDnet's TE100-P1U is a print server that transforms a stand-alone USB printer into a shared network printer. The TE100-P1U provides Fast Ethernet interface for integrating into existing network. The TE100-P1U is designed for virtually all printers equipped with USB 2.0 compliant printer port and it is an ideal network solution to convert conventional USB printer into a shared resource on the network.

(version2)



FEATURES

- Compliant with USB 2.0 High-Speed Printing
- One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet Port
- Supports Email Printing and FTP Printing
- Includes LPR Program for Windows 95/98/ME TCP/IP Printing
- Supports IPP Printing for Windows 2000/XP
- Supports second HTTP port for Remote Web Configuration and IPP Printing
- Supports Mac 10.2 "Rendezvous" Zero-Configuration Function
- TCP/IP protocol supports DHCP, IPP, LPR, HTTP
- IP Assignment Support for DHCP
- Includes Windows-Based Administrative Program and Web-Based Configuration
- Built-in Flash Memory for Easy Firmware Upgrade
- 3-Years Warranty

Note: Mac Systems are only compatible with Post-Script printers

BENEFITS

- **Integration Friendly:**
Supports multiple protocols and all popular Operating Systems
- **Flexible:**
Integrates with 10Base-T, 100Base-TX
- **Cost Effective:**
Turns the stand-alone printer into a network printer
- **Performance:**
100Mbps bandwidth for wired network



TE100-P1U(v2)

10/100Mbps USB 2.0 Print Server

SPECIFICATIONS

Standards:

- IEEE 802.3 10Base-T
- IEEE 802.3u 100Base-TX

LAN Port:

- 10/100Mbps Auto-Negotiation UTP/STP RJ-45 Port

Printer Interface:

- USB 2.0, 1.1 Compliant USB Type A Port

CPU/SDRAM/Flash ROM:

- RDC R2886 150MHz / 2MByte / 512KByte

LED:

- Power, USB, Link/Act

Transport Protocol:

- TCP/IP

OS Support:

- Windows 95/98(SE)/ME/NT/2000/XP/2003
- Netware 5.x NDPS LPR Remote Printing (TCP/IP)
- Unixware
- Linux
- Mac OS X (IP Printing)

TCP/IP Protocol Supported:

- DHCP, IPP, LPR, HTTP

Management:

PS Utility or Web-Browser Configuration

Power:

5V DC 2.5A External Power Adapter

Dimensions (LxWxH):

90 x 80 x 48mm (3.5 x 3.25 x 1.5 inches)

Weight:

135 g (4.75oz.)

Temperature:

Operating : 0 ° ~50 ° C (32 ° ~122 ° F)

Storage: -25 ° ~55 ° C (-13 ° ~131 ° F)

Humidity:

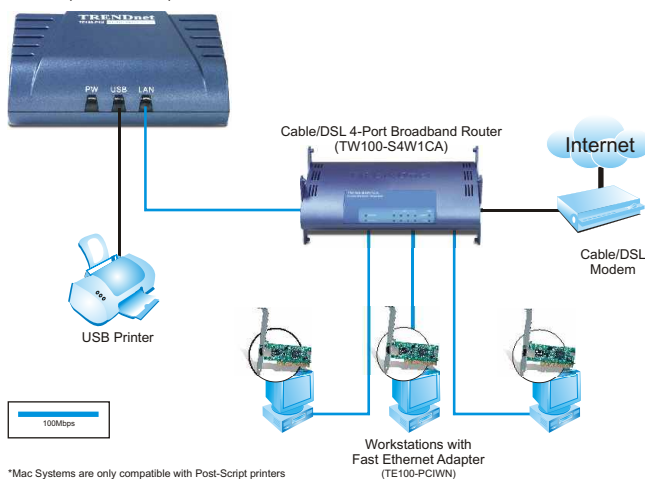
10%~90% (non-condensing)

Certifications:

CE, FCC



NETWORKING SOLUTIONS

**10/100Mbps
USB 2.0 Print Server
(TE100-P1U)**

**To Order Please Call:
1-888-326-6061**

RELATED PRODUCT

- ➡ **TEW-P1PG:** 54Mbps 802.11g Wireless Parallel Print Server
- ➡ **TEW-P1UG:** 54Mbps 802.11g Wireless USB 2.0 Print Server
- ➡ **TEW-P21G:** 54Mbps 802.11g Multi-Port Print Server 2 USB 2.0 & 1 Parallel Printer Port
- ➡ **TE100-P21:** 10/100Mbps Multi-Port Print Server 2 USB 2.0 & 1 Parallel Printer Port

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

TRENDnet
TRENDware, USA