



Quick Installation Guide



Indoor / Outdoor Antenna,
Antenna Cable & Surge Arrestor

Table of Contents



Français	1
1. Installation de l'antenne extérieure	1
2. Installation du protecteur de surcharge	4
3. Toile isolante pour installation extérieure	5
4. Installation de l'antenne intérieure	6

1. Installation de l'antenne extérieure


Avant de procéder à l'installation, assurez-vous de disposer des produits nécessaires et que toutes les boîtes sont complètes.



L'une des antennes suivantes:

TEW-AO080	TEW-AO100	TEW-AO09D	TEW-AO14D	TEW-AO19D
				


1. Débranchez l'antenne dipôle par défaut du point d'accès intérieur ou de votre routeur.




2. Fixez le manchon bleu (SMA inversé) de câble Jumper à votre périphérique Wi-Fi.



3. Branchez le manchon noir (de type N) du câble Jumper au protecteur de surcharge. *Veillez vous référer a la section No.2 "Installation de l'antenne intérieure")*



4. Branchez la fiche restante du protecteur de surcharge au manchon bleu (de type N) du câble de l'antenne (TEW-L406/TEW-L412)




5. Branchez le câble vert sur un dispositif à la terre.
ex.

1. Tige de terre
2. Syst. électr. relié à la terre
3. Bâtiment

6. Branchez le manchon noir restant (de type N) du câble d'antenne à l'antenne.




7. L'installation de votre antenne pour usage extérieur est maintenant complète.

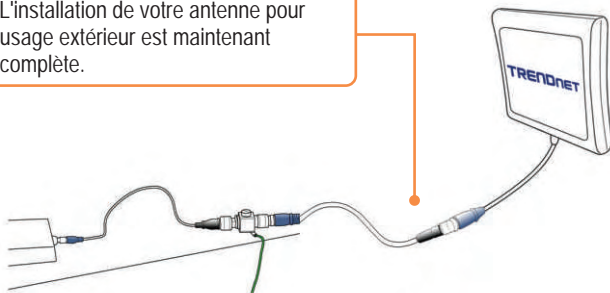


2. Installation du protecteur de surcharge


1. Avant d'installer l'antenne, assurez-vous que le câble extérieur à faibles pertes (TEW-L406/TEW-L412) est assez long pour atteindre le point d'accès ou le routeur. Fixez le manchon bleu de l'adaptateur de câble au périphérique Wi-Fi (SMA inversé) et le manchon noir (de type N) de l'adaptateur de câble au protecteur de surcharge.





2. Enlevez la patte métallique de type L et indiquez l'endroit de la fixation sur le mur.



3. Vissez-le au mur.



4. Positionnez le protecteur dans le support.



Mettez la rondelle



Serrez l'écrou



3. Toile isolante pour installation extérieure

Si votre protecteur de surcharge est installé à l'extérieur, n'oubliez pas d'entourer les deux prises avec la toile isolante fournie.




4. Installation de l'antenne intérieure

Avant de procéder à l'installation, assurez-vous de disposer des produits nécessaires et que toutes les boîtes sont complètes.




L'une des antennes:

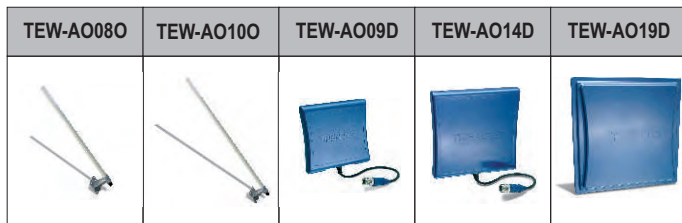


Remarque : Les antennes intérieures ci-dessous sont fournies avec les câbles ou se branchent directement à votre périphérique Wi-Fi. Aucun autre câble n'est nécessaire:



1. Débranchez l'antenne dipôle du point d'accès ou de votre routeur.




2. Fixez le manchon bleu (SMA inversé) du câble intérieur (TEW-L202/TEW-L208) directement sur le périphérique Wi-Fi.



3. Branchez le manchon noir restant (de type N) du câble d'antenne au manchon bleu (de type N) de l'antenne.



4. L'installation de votre antenne pour usage intérieur est maintenant complète.

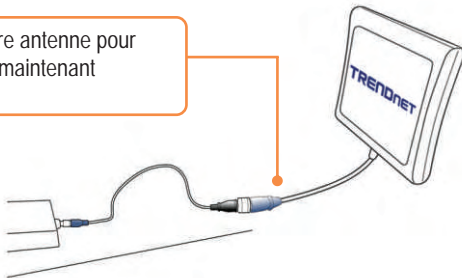

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

TEW-ASAK, TEW-L202, TEW-L208, TEW-L406, TEW-L412 - 3 Year Warranty
TEW-AO08O, TEW-AO10O, TEW-AO09D, TEW-AO14D, TEW-AO19D- 3 Year Warranty

If a product does not operate as warranted above during the applicable warranty period, TRENDnet shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product. All products that are replaced will become the property of TRENDnet. Replacement products may be new or reconditioned.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet office within the applicable warranty period for a Return Material Authorization (RMA) number, accompanied by a copy of the dated proof of the purchase. Products returned to TRENDnet must be pre-authorized by TRENDnet with RMA number marked on the outside of the package, and sent prepaid, insured and packaged appropriately for safe shipment.

WARRANTIES EXCLUSIVE: IF THE TRENDnet PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDnet'S OPTION, REPAIR OR REPLACEMENT. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDnet NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDnet'S PRODUCTS.

TRENDnet SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDnet ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDnet'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

AC/DC Power Adapter, Cooling Fan, and Power Supply carry 1 Year Warranty



TRENDnet

TRENDnet Technical Support

US/Canada Support Center

Contact

Telephone: 1(866) 845-3673

Email: support@trendnet.com

Tech Support Hours

24/7 Toll Free Tech Support



European Support Center

Contact**Telephone:**

Deutsch : +49 (0) 6331 / 268-460

Français : +49 (0) 6331 / 268-461

0800-90-71-61 (numéro vert)

Español : +49 (0) 6331 / 268-462

English : +49 (0) 6331 / 268-463

Italiano : +49 (0) 6331 / 268-464

Dutch : +49 (0) 6331 / 268-465

Fax: +49 (0) 6331 / 268-466

Tech Support Hours

8:00am - 6:00pm

Middle European Time

Monday - Friday

Product Warranty Registration

Please take a moment to register your product online.

Go to TRENDnet's website at <http://www.trendnet.com>

TRENDnet

3135 Kashiwa Street

Torrance, CA 90505

USA