



Quick Installation Guide



Indoor / Outdoor Antenna,
Antenna Cable & Surge Arrestor

Table of Contents

Русский	1
1. Установка наружной антенны	1
2. Порядок установки грозозащитного разрядника	4
3. Герметизирующая лента для монтажа вне помещений	5
4. Установка внутрикомнатной антенны	6

1. Установка наружной антенны

Перед установкой проверьте наличие необходимых компонентов и комплектность каждого из них.



TEW-ASAK



- Кабельная перемычка
- Грозозащ. разрядник




TEW-L406/TEW-L412

- TEW-L406 – Кабельная (6 метров)
- TEW-L412 – Кабельная (12 метров)

Одна из следующих антенн:

TEW-AO080	TEW-AO100	TEW-AO09D	TEW-AO14D	TEW-AO19D
				


1. Отсоедините первоначальную вибраторную антенну от работающей внутри помещения точки доступа или маршрутизатора.



2. Присоедините синюю втулку (Reverse SMA) кабельной перемычки к устройству Wi-Fi.



3. Присоедините черную втулку (тип N) кабельной перемычки к грозозащитному разряднику. См. страницу с описанием «Порядок установки грозозащитного разрядника»)





4. Присоедините остающийся разъем гродозащитного разрядника к синей втулке (тип N) антенного кабеля. (TEW-L406/TEW-L412)

5. Присоедините зеленый провод к источнику заземления. , напр.:

1. Заземляющий стержень
2. Заземленная электрическая система
3. Каркас здания

6. Присоедините остающуюся черную втулку (тип N) антенного кабеля к антенне.

7. Установка наружной антенны завершена.

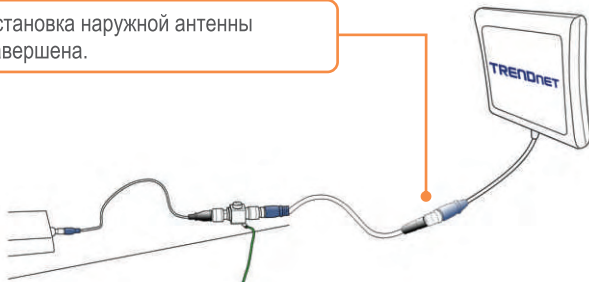


2. Порядок установки грозозащитного разрядника


1. Перед установкой антенны убедитесь в том, что кабель для снижения потерь (TEW-L406/TEW-L412) достаёт до места нахождения точки доступа или маршрутизатора. Присоедините синюю втулку кабельного переходника из комплекта к устройству Wi-Fi (Reverse SMA), а черную втулку кабельного переходника (тип N) к грозозащитному разряднику.




2. Извлеките L-образный металлический кронштейн и пометьте на стене место крепления.



3. Привинтите его к стене.



4. Вставьте разрядник в кронштейн.



Установить шайбу



Завинтить гайку



3. Герметизирующая лента для монтажа вне помещений

Если грозозащитный разрядник устанавливается вне помещения, не забудьте плотно замотать оба разъема герметизирующей лентой из комплекта.



4. Установка внутрикомнатной антенны

Перед установкой проверьте наличие необходимых компонентов и комплектность каждого из них.



TEW-L202/TEW-L208

- TEW-L202 – Кабельная (2 метров)
- TEW-L208 – Кабельная (8 метров)


Одна из следующих антенн:

TEW-AO080	TEW-AO100	TEW-AO09D	TEW-AO14D	TEW-AO19D


Примечание: следующие внутрикомнатные антенны снабжаются кабелями или подключаются прямо к устройству Wi-Fi. Дополнительная сборка для кабелей не нужна. :

TEW-AI86D	TEW-AI86DB	TEW-AI750	TEW-AI750B

1. Отсоедините вибратор-ную антенну от точки досту-па или маршрутизатора.



2. Присоедините синюю втулку (Reverse SMA) внутреннего кабеля (TEW-L202/TEW-L208) прямо к устройству Wi-Fi.



3. Присоедините остающуюся черную втулку (тип N) антенного кабеля к синей втулке (тип N) антенны.



4. Установка внутрикомнатной антенны завершена.



Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

TEW-ASAK, TEW-L202, TEW-L208, TEW-L406, TEW-L412 - 3 Year Warranty
TEW-AO08O, TEW-AO10O, TEW-AO09D, TEW-AO14D, TEW-AO19D- 3 Year Warranty

If a product does not operate as warranted above during the applicable warranty period, TRENDnet shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product. All products that are replaced will become the property of TRENDnet. Replacement products may be new or reconditioned.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet office within the applicable warranty period for a Return Material Authorization (RMA) number, accompanied by a copy of the dated proof of the purchase. Products returned to TRENDnet must be pre-authorized by TRENDnet with RMA number marked on the outside of the package, and sent prepaid, insured and packaged appropriately for safe shipment.

WARRANTIES EXCLUSIVE: IF THE TRENDnet PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDnet'S OPTION, REPAIR OR REPLACEMENT. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDnet NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDnet'S PRODUCTS.

TRENDnet SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDnet ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDnet'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

AC/DC Power Adapter, Cooling Fan, and Power Supply carry 1 Year Warranty



TRENDnet

TRENDnet Technical Support

US/Canada Support Center

Contact

Telephone: 1(866) 845-3673

Email: support@trendnet.com

Tech Support Hours

24/7 Toll Free Tech Support



European Support Center

Contact**Telephone:**

Deutsch : +49 (0) 6331 / 268-460

Français : +49 (0) 6331 / 268-461

0800-90-71-61 (numéro vert)

Español : +49 (0) 6331 / 268-462

English : +49 (0) 6331 / 268-463

Italiano : +49 (0) 6331 / 268-464

Dutch : +49 (0) 6331 / 268-465

Fax: +49 (0) 6331 / 268-466

Tech Support Hours

8:00am - 6:00pm

Middle European Time

Monday - Friday

Product Warranty Registration

Please take a moment to register your product online.

Go to TRENDnet's website at <http://www.trendnet.com>

TRENDnet

3135 Kashiwa Street
Torrance, CA 90505
USA