



## 5-Port 10/100/1000Mbps Copper Gigabit Switch

### TEG-S50TXE [c1]

TEG-S50TXE Gigabit Ethernet Switch consists of five 10/100/1000Mbps Gigabit Ethernet ports with Auto-negotiation and Auto-MDIX features. Users can connect Server(s) to the Gigabit port(s) to increase network performance or cascade Copper Gigabit Switches together to create high-bandwidth Gigabit backbones. TRENDnet's TEG-S50TXE provides simple migration, scalability and flexibility to handle new applications and data types making it a highly reliable and cost effective solution for high-speed network connectivity.

## FEATURES

- 5 x 10/100/1000Mbps Auto-Negotiation, Auto-MDIX Gigabit Ethernet Ports
- Full/Half-duplex transfer mode for 10/100Mbps, Full-Duplex mode for 1000Mbps
- Store-and-Forward switching method
- Wire-speed reception and transmission
- IEEE 802.3x flow control for full-duplex mode
- Back pressure flow control for half-duplex mode
- Integrated address Look-Up engine, supports 8K MAC addresses
- Operates and maximizes packet filtering and forwarding rate
- Provides 112kbyte RAM data buffering
- Sturdy metal housing
- Diagnostic LEDs
- Plug & Play
- 5-Year Warranty


# 5-Port 10/100/1000Mbps Copper Gigabit Switch

## TEG-S50TXE (c1)

### SPECIFICATIONS

Hardware	
Standards	<ul style="list-style-type: none"> <li>• IEEE 802.3 10Base-T</li> <li>• IEEE 802.3u 100Base-TX    IEEE 802.3ab 1000Base-T</li> </ul>
Network Media	<ul style="list-style-type: none"> <li>• thernet: 2-pair UTP Cat. 3,4,5, up to 100m</li> <li>• Fast Ethernet: 2-pair UTP Cat. 5, up to 100m</li> <li>• Gigabit Ethernet: 4-pair UTP Cat. 5, 5e,6, up to 100m</li> </ul>
Data Rate	<ul style="list-style-type: none"> <li>• Ethernet: 10Mbps/20Mbps (Half/Full-Duplex)</li> <li>• Fast Ethernet: 100Mbps/200Mbps (Half/Full-Duplex)</li> <li>• Gigabit Ethernet: 2000Mbps (Full-Duplex)</li> </ul>
Protocol	• CSMA/CD
Topology	• Star
Interface	• 5 10/100/1000Mbps Auto-MDIX RJ-45 Ports
Data RAM Buffers	• 112KB per Device
Filtering Address Table	• 8K entries per device
Power Consumption	• 5 Watts (max)
Diagnostic LEDs	• Power, Link/ACT, 100Mbps, 1000Mbps
Power Supply	• 7.5V DC, 1.5A External Power Adapter
Dimensions (WxDxH)	• 171 x 98 x 28mm (6.73 x 3.86 x 1.1 inch)
Weight	• 430 g (15.2 oz)
Temperature	<ul style="list-style-type: none"> <li>• Operating: 0° ~ 40° C (32° ~ 104° F)</li> <li>• Storage: -10° ~ 70° C (14° ~ 158° F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>• Operating: 10 % ~ 90 %</li> <li>• Storage: 5% ~ 90% (non-condensing)</li> </ul>
Certifications	• FCC,CE

### NETWORKING SOLUTIONS

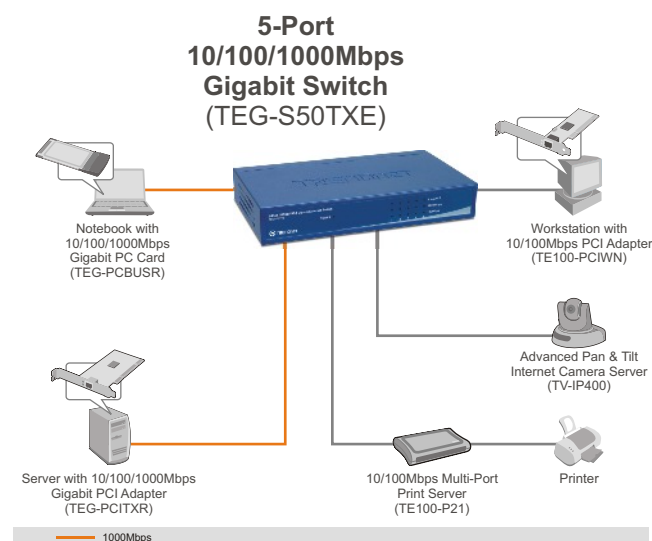

### PACKAGE CONTENTS

- TEG-S50TXE
- Multi-Language QIG

### RELATED PRODUCTS

TEG-S80TXE	8-Port 10/100/1000Mbps Copper Gigabit Switch
TEG-PCITXR	32-bit 10/100/1000Mbps Copper Gigabit PCI Adapter
TEG-PCBUSR	32-bit Gigabit CardBus PC Card

### ORDERING INFORMATION

#### TRENDNET

3135 Kashiwa Street, Torrance, CA 90505 USA  
 Tel: 1-310-891-1100  
 Fax: 1-310-891-1111  
 Web: [www.trendnet.com](http://www.trendnet.com)  
 Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

