




5-Port Gigabit Desktop Switch

TEG-S51 (v1.0R)


- Plug and play installation
- 5 x Gigabit ports
- 10Gbps switching capacity
- Sturdy metal switch
- Fanless design

The 5-Port Gigabit Desktop Switch, model TEG-S51, provides high bandwidth performance, ease of use, and reliability. Boost office network efficiency and eliminate network congestion with gigabit speeds and a total switching capacity of 10Gbps with full-duplex mode. Integrate this sturdy metal switch for reliable high-speed network connectivity.




Gigabit Speeds

Gigabit ports provide high-speed network connections to five devices, and a 10Gbps switching capacity allows data traffic to flow smoothly, reducing traffic bottlenecks.



Compact Design


With a compact and lightweight metal housing design, this switch is well-suited for desktop installations.




Fanless

Fanless design lowers energy consumption and reduces distracting operating noise.

NETWORKING SOLUTION

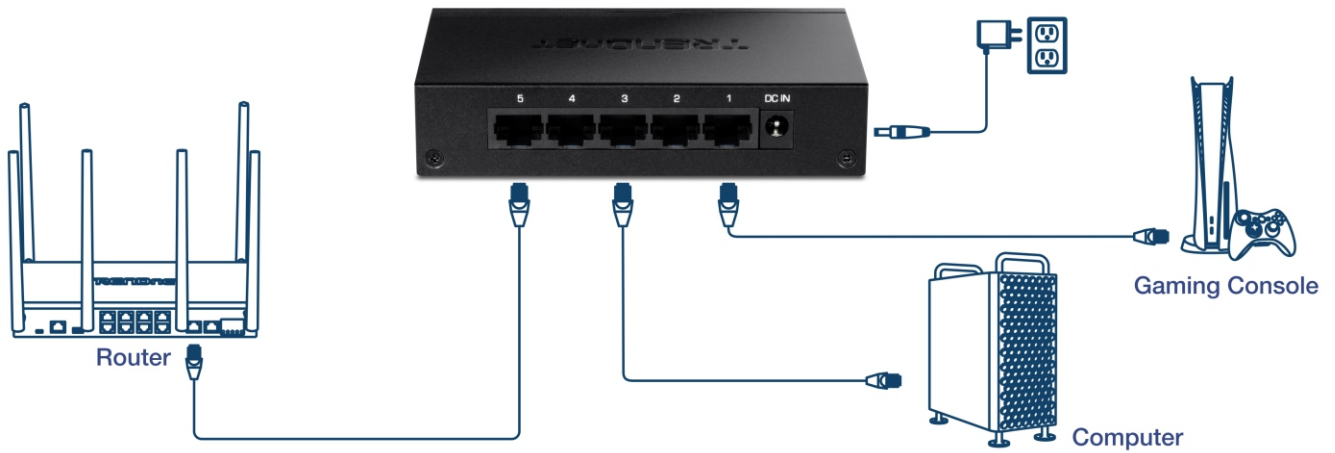

LED indicators

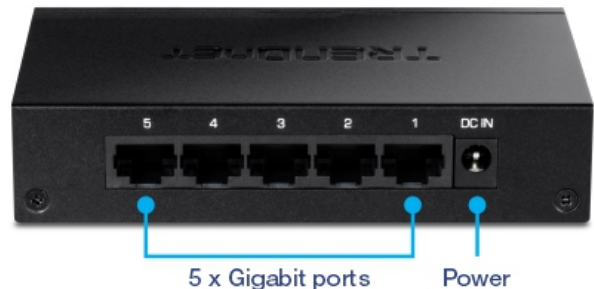

5 x Gigabit ports

Power

FEATURES



Easy Setup

Simply power up the switch and plug in connected devices



Ports

5 x Gigabit Ethernet ports



Switching Capacity

10Gbps switching capacity



Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 9KB), for increased performance



Fanless

Fanless design lowers energy consumption and eliminates operating noise



Housing Design

Compact and lightweight metal housing



LED Indicators

LEDs convey power, link, and activity

SPECIFICATIONS

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3ab

Device Interface

- 5 x Gigabit ports
- LED indicators

Data Transfer Rate

- Ethernet: 10Mbps (half duplex), 20Mbps (full duplex)
- Fast Ethernet: 100Mbps (half duplex), 200Mbps (full duplex)
- Gigabit: 2000Mbps (full duplex)

Performance

- Switching Capacity: 10Gbps
- RAM Buffer: 128KB
- MAC Address Table: 2K entries
- Forwarding Rate: 7.44Mpps (64-byte packet size)
- Jumbo Frames: 9KB

Power

- Input: 100 – 240V AC, 50/60 Hz, 0.2A
- Output: 5 V DC, 1A external power adapter
- Max. Consumption: 2.01W

Fan/Acoustics

- Fanless design

MTBF

- 1,615,840 hours

Operating Temperature

- 0° – 40° C (32° – 104° F)

Operating Humidity

- Max. 90% non-condensing

Dimensions (L x W x H)

- 121 x 75 x 26mm (4.76 x 2.95 x 1.02 in.)

Weight

- 220g (7.76 oz.)

Certifications

- FCC
- CE

Warranty

- 3 year

Package Contents

- TEG-S51
- Quick Installation Guide
- Power Adapter (5V DC, 1A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.