


I . Introduction

The **TPH 5000** series Camera Enclosure is constructed from die-cast aluminium and is powder coated and stove finished. The design and manufacture is to the highest technical standard with environmental protection to level IP 66. The Enclosure is supplied complete with an adjustable Fully-Cable-Managed mounting bracket (the concealed cable channel inside mounting bracket.)

II . Mounting configuration of TPH 5000 series

Fig.1

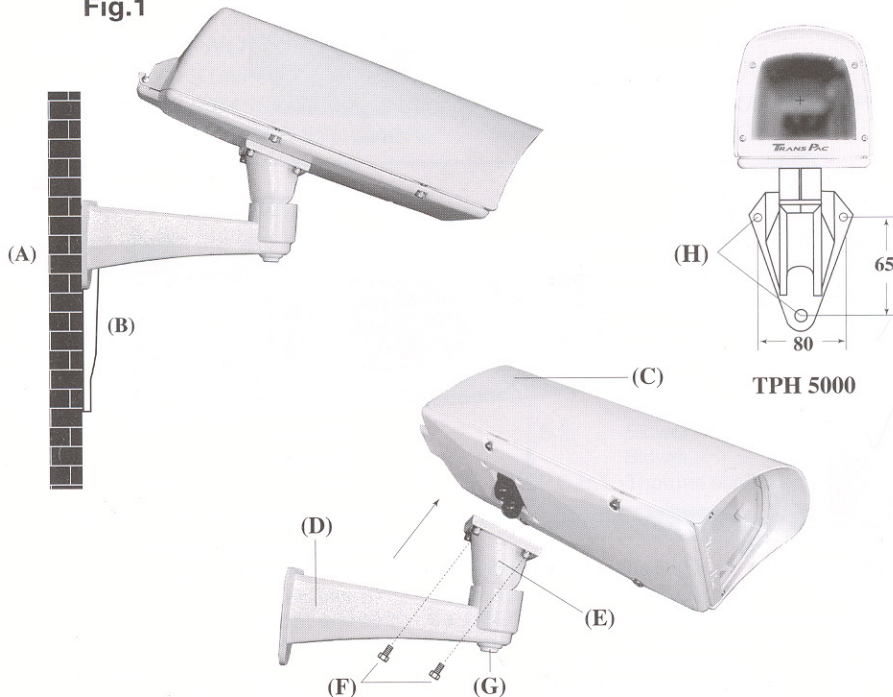

1. Use the rear section of the Mounting Bracket (D) as a template for marking the position on the wall of the Mounting Holes (H). Remove & drill to pattern required.
2. Attach the Mounting Bracket arm to the wall using the rawlplugs and screws provided.
3. Feed cables from the main Enclosure (C) through the hole of Mounting Plate (E) on the Mounting Bracket (D), then feed cable again to concealed cable channel inside the Mounting Bracket throughout wall outlet (A) or bracket outlet (B).
4. Attach the main Enclosure (C) to the Mounting Plate (E) of Bracket with 4 of 1/4"-20 Trilobular screws (F) provided.
5. Release Screw (G) on the Mounting Bracket to pan and tilt the Enclosure. Position the Enclosure as required for the correct camera coverage then tighten Screw to secure.

III. Fitting instructions for camera

Fig.2


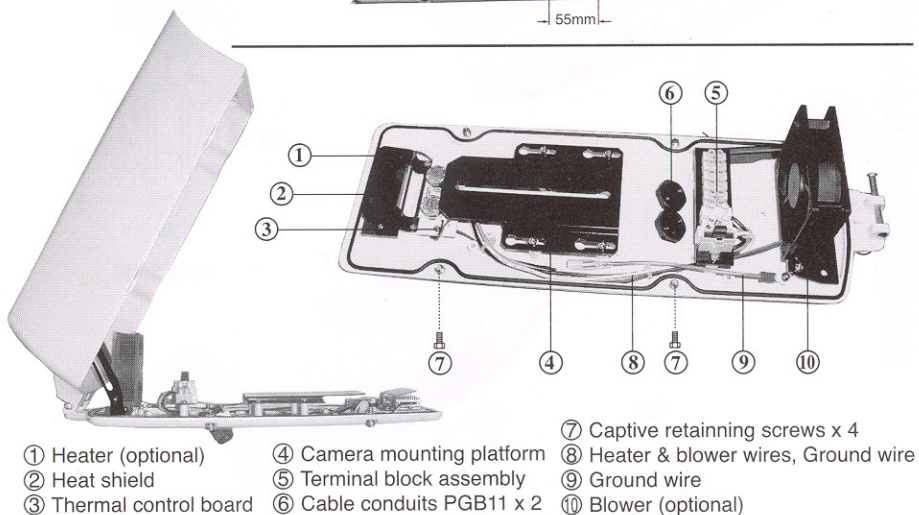


Fig.3

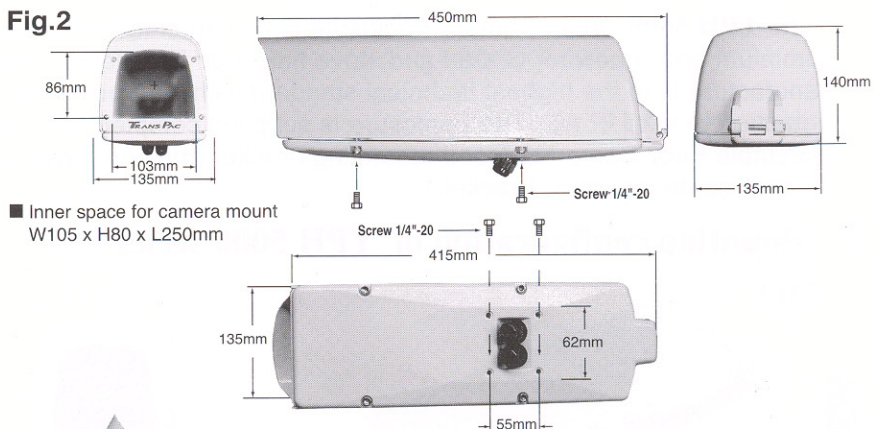