



TEW-230APB (C1) **11Mbps 802.11b Wireless Access Point**

TRENDnet's TEW-230APB Wireless Access Point is today's link to Wireless Technology. Compliant with the IEEE Wireless Networking Standard 802.11b, it provides Direct Sequence Spread Spectrum (DSSS) operation for transparent bridging and roaming capabilities for wireless nodes. The TEW-230APB also provides WDS bridging functions, allowing users to connect two or more Access Points together, wirelessly. With TRENDnet's Wireless Access Point and Wireless Network Adapters, users can connect to Ethernet/Fast Ethernet LAN at home or office to access network resources such as hard drives, CD-ROM/DVD drives, network printers, and Internet connection - with coverage up to 300 meters.



Features

- Operates as Access Point, Access Point Client or WDS Wireless Bridge/Repeater mode
- Provides Security with 64/128-Bit WEP and WPA
- Supports 802.1x Authentication and MAC Address Control for Authorization Access (20 entries)
- Supports most operating systems, such as Windows 95/98/ME/NT/2000/XP, Unix and Mac
- Allow Users to Disable ESSID Broadcast to increase wireless security
- 10/100Mbps Auto-Sensing Fast Ethernet Port
- Dynamic Data Rate Scaling at 11, 5.5, 2 and 1Mbps
- Allow auto fallback data rate for optimized reliability, throughput and transmission range
- One 2dBi Detachable Diversity Antenna. Replace with optional High-Gain antenna to extend the range/coverage area
- Easy configuration and maintenance with Web Browser (HTTP)
- Flash memory for firmware upgrade and save/restore settings
- Distance coverage 40 to 100 meters indoor, 100 to 300 meters outdoors (depends on the environment)
- 3-Year Warranty

BENEFITS

- **Integration Friendly:**
Supports both Ethernet and Fast Ethernet, with Web Browser configuration for fast and easy setup
- **Economical:**
Attaches to Ethernet network at anytime to add wireless users on the network. Save time, labor, and material for network cable installation
- **Flexible:**
Works as stand-alone Access Point, Single/Multiple Access Point(s) Bridge, or Ethernet Access Point Client
- **Security:**
Provides 64/128-bit WEP Encryption, WPA and 802.1x Authentication Support
- **Cost Effective:**
One unit provides multiple wireless connections to wired LAN

TEW-230APB (C1)

11Mbps 802.11b Wireless Access Point

SPECIFICATIONS

Standards:

- IEEE 802.11b, 802.3u

Modulation:

- Direct Sequence Spread Spectrum (DSSS)

Frequency Range:

- 2.4 ~ 2.497 Ghz

Data Rate:

- 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps (auto-fallback)

Operating Mode:

- AP, AP Client, WDS Bridging & Repeater

Channel:

- 1~ 14 Channels (Universal Support)

Security:

- 64/128-bit WEP (Hex & ASCII)
- WPA (TKIP)
- 802.1x Authentication
- MAC Address Access Control (ACL)

Antenna:

- 2 x 2dBi Detachable Diversity Antennas with Female Reverse SMA connector

Output Power:

- 13 dBm (min)

Transmit Power:

- Adjustable 10dBm (12.5%), 12dBm (25%), 15dBm (50%) and 17dBm (100%)

Receiving Sensitivity:

- 11Mbps: -84dBm @ 8% PER (Packet Error Rate)
- 2 Mbps: -90dBm @ 8% PER (Packet Error Rate)

Media Connector:

- 10/100Mbps, Half/Full Duplex

LED Indicators:

- Power, LAN & WLAN

Power:

- 5V DC 1.2 A External Power Adapter

Dimensions:

- 124 x 86 x 40 mm (4.9 x 3.4 x 1.6 inches) (without antenna)

Weight:

- 118g. (0.26 lb)

Temperature:

- Operating: -0° ~ 40°C (32° ~104°F)
- Storage: -10° ~ 70°C (14° ~ 158°F)

Humidity:


- Max. 90% (non-condensing)

Certification:

- FCC, CE



NETWORKING SOLUTIONS

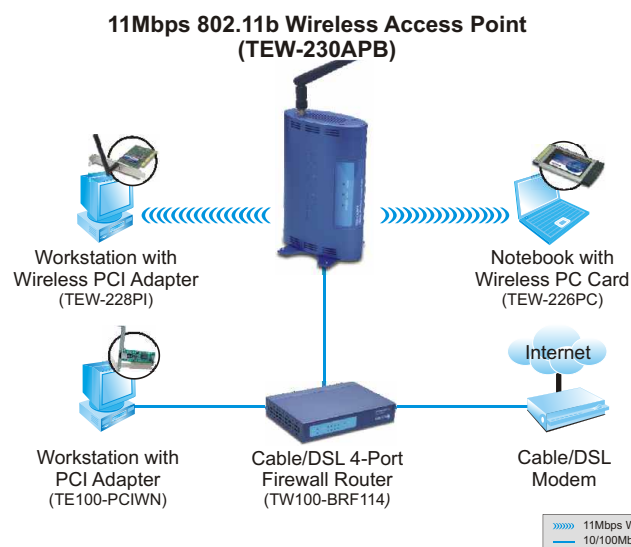

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- ➡ **TEW-230APB:** 11Mbps 802.11b Wireless Access Point
- ➡ **TEW-226PC:** 11Mbps 802.11b Wireless CardBus PC Card
- ➡ **TEW-228PI:** 11Mbps 802.11b Wireless PCI Adapter

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

