



TEW-410APBplus 125Mbps 802.11g Wireless Access Point

TRENDnet's TEW-410APBplus 125Mbps Wireless Access Point is today's link between wired and wireless networks. Compliant with the most advanced IEEE 802.11g and 802.11b wireless networking standards; it provides Direct Sequence Spread Spectrum (DSSS) operation for transparent bridging and roaming capabilities for wireless nodes. The TEW-410APBplus also provides AP-to-AP bridging functions, allowing users to connect two or more Access Points together, wirelessly. With TRENDnet's Wireless Access Point and Wireless Network Adapters, users can connect to Ethernet/Fast Ethernet LAN at home or office to access network resources such as hard drives, CD-ROM/DVD drives, network printers, and Internet connection.



FEATURES

- ... Uses 2.4 GHz ISM Frequency Band, Wi-Fi Compliant with IEEE 802.11g and IEEE 802.11b Devices
- ... Provides Wireless Data Rate of up to 125 Mbps with Automatic Fallback (Afterburner Technology)
- ... 125Mbps Afterburner Technology (in Access Point Mode only)
- ... Supports Access Point and Access Point Client Modes
- ... Wireless Distribution System (WDS) supports Wireless Bridging and Repeater Modes
- ... 64/128-bit Wired Equivalent Privacy (WEP) with ASCII, HEX, or Passphrase Key
- ... WPA (Pre-Shared Key or RADIUS) supports TKIP or AES Algorithm
- ... MAC Address Filter for Preventing or Permitting Wireless Connections (40 entries)
- ... Allows Users to Enable/Disable ESSID Broadcast for Improved Protection
- ... Detachable 3dBi Dipole Antenna, can be replaced with optional High-Gain antenna to extend the range
- ... Easy Web Browser (HTTP) Configuration and Maintenance
- ... Flash Memory for Firmware Upgrade and Save/Restore Settings
- ... Range for 802.11b: up to 35~60 meters indoor, 300 meters outdoor (depends on the environment)
- ... Range for 802.11g: up to 20 meters indoor, 50 meters outdoor (Depends on the environment)
- ... 3-Year Warranty

BENEFITS

- ... **Integration Friendly:**
Supports both Ethernet (10Mbps) and Fast Ethernet (100Mbps), with Web Browse configuration for fast and easy Configuration
- ... **Economical:**
Attaches to Ethernet network at anytime to add wireless users on the network. Save time, labor and material for network cable installation
- ... **Installation Flexible:**
Works as Access Point, Access Point Client, Bridge or Repeater
- ... **Security:**
Provides 64/128-bit WEP Encryption, WPA and MAC Address Access Control Cost
- ... **Effective:**
One unit provides multiple wireless connections to wired LAN

TEW-410APBplus

125Mbps 802.11g Wireless Access Point

SPECIFICATIONS

HARDWARE

Standards:

- Wired: IEEE 802.3 (10Base-T), and IEEE 802.3u (100Base-TX)
- Wireless: IEEE 802.11b (11Mbps), IEEE 802.11g (54Mbps) and High Speed-G (125Mbps)

Protocols:

- TCP/IP, IPX/SPX, NetBEUI

LAN:

- 1 x 10/100Mbps Auto-MDIX Port

LED Indicator:

- Power, Active, WAN, LAN1, LAN2, LAN3, LAN4

Antenna:

- 1 x 3dBi External Detachable Dipole Antenna

Reset Button:

- Reset settings to factory default

Dimension (L x W x H):

- 142 x 101 x 36.9 mm (5.6 x 4 x 1.45 inches)

Weight:

- 0.33kg (11.6 oz.)

Temperature:

- 0°~ 40°C (32°F~104°F)

Humidity:

- Max. 90% (non-condensing)

Power Adapter:

- Input:
US power type: 120V AC 60Hz
EU power type: 230V AC 50Hz
AU power type: 240V AC 50Hz
UK power type: 230V AC 50Hz
- Output:
12V DC, 0.5A (Standard Package Accessory) or 5V DC, 2A External Power Adapter

Certification:

- FCC & CE



WIRELESS

Frequency:

- 2.4 to 2.4385GHz (Industrial Scientific Medical Band)

Module Technique:

- 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps)
- 802.11g: OFDM

Media Access Protocol:

- CSMA/CA with ACK

Security:

- 64/128bit WEP, WPA, Enable/Disable SSID, Password Protection

Transmit Power:

- 15 dBm \pm 1dBm

Operation Modes:

- AP, Bridge, Repeater and AP-Client

Data Rate:

- 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps
- 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps
- High Speed-G: 125Mbps (Afterburner technology, Enhanced Throughput by up to 40%)

Receiving Sensitivity:

- 11Mbps 10 - 5 BER @ -80 dBm (typical)
- 54Mbps 10 - 5 BER @ -65 dBm (typical)


Operating Range:

- 802.11b: 11Mbps up to 35~60 meters (indoor), 300 meters (outdoor)
- 802.11g: 54Mbps up to 20 meters (indoor), 50 meters(outdoor)

Channels:

- 11 Channels (US), 13 Channels (EU)

NETWORKING SOLUTIONS

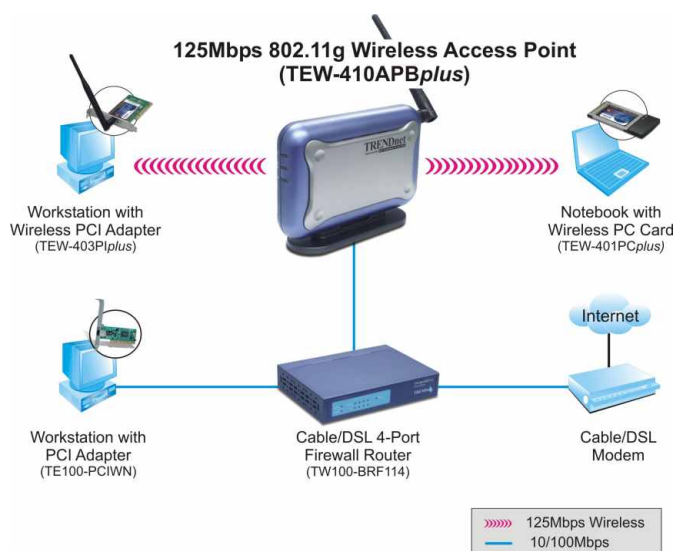

To Order Please Call:
1-888-326-6061

RELATED PRODUCT

- ➔ **TEW-401PCplus:**
125Mbps 802.11g Wireless PC Card
- ➔ **TEW-403Pplus:**
125Mbps 802.11g Wireless PCI Network Adapter
- ➔ **TEW-410APBplus:**
125Mbps 802.11g Wireless Access Point + Bridge + Repeater
- ➔ **TEW-411BRPplus:**
125Mbps 802.11g Wireless Broadband Router
- ➔ **TEW-PS1U:**
11Mbps Wireless USB port Multi-Protocol Print Server

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

TRENDnet
TRENDware, USA