



54Mbps 802.11g Wireless PC Card TEW-421PC (C1.0R)

TEW-421PC 54Mbps Wireless CardBus PC Card allows laptop users the mobile freedom to connect at home, in the office or to wireless hotspots on the road. It complies with the IEEE 802.11g standard, making it backward compatible with 802.11b networks for assured compatibility as you roam between networks. Advanced 128-bit WEP encryption is supported to provide secure access for your data. Cut the wires and move freely with TRENDnet's 802.11g wireless products.

FEATURES

- Wi-Fi Compliant with IEEE 802.11g and IEEE 802.11b Standards
- Uses 2.4 GHz Frequency Band, which Complies with Worldwide Requirements
- Supports Ad-Hoc (Peer-to-Peer) Mode or Infrastructure (AP-Client) Mode
- Dynamic Data Rate Scaling at 54, 48, 36, 24, 18, 12, 9 and 6Mbps for 802.11g
- Dynamic Data Rate Scaling at 11, 5.5, 2 and 1Mbps for 802.11b
- Maximum Reliability, Throughput and Connectivity with Automatic Data Rate Switching
- Compatible with Windows 98/ME/2000/XP/Vista (32/64bit)
- Supports 64/128-bit WEP, WPA/WPA2 and WPA-PSK/WPA2-PSK
- Integrated Microstrip Dual Diversity Antenna for the Multi-Path Environment
- Low Interference and High Susceptibility Guarantee Reliable Performance
- Range of 35~100 meters indoor, 100~300 meters outdoor (depends on the environment)
- Simple User Setup & Diagnostics Utilities
- 3-Year Warranty


54Mbps 802.11g Wireless PC Card

TEW-421PC (C1.0R)

SPECIFICATIONS

Hardware	
Interface	• 32-Bit CardBus Type II Card
Standards	• IEEE 802.11b and IEEE 802.11g
Antenna	• Integrated Microstrip Dual Diversity Antenna
LED Indicator	• Power, Link
Power Consumption	• Receive Mode: 370mA • Transmit Mode: 470 mA
Supported OS	• Windows 98, ME, 2000, XP, Vista (32/64bit)
Dimensions (LxWxH)	• 119 x 54 x 3 mm (4.7 x 2 x 0.1 inches)
Weight	• 40g (1.4oz)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104° F) • Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	• 10% ~ 95%max (Non-condensing)
Certification	• FCC, CE
Wireless	
Module Technique	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM
Frequency	• 2.412 to 2.484 GHz (Industrial Scientific Medical Band)
Media Access Protocol	• CSMA/CA with ACK
Data Rate (auto fallback)	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps
Transmit Power	• 15dBm (typically) @ 802.11b • 13dBm (typically) @ 802.11g
Receiving Sensitivity	• 54Mbps 10% PER @ -70 dBm (typical) • 11Mbps 8% PER @ -86 dBm (typical)
Security	• WPA/WPA2(TKIP), WPA-PSK/WPA2-PSK(AES/TKIP), 64/128-Bit WEP (Hex or ASCII)
Channels	• 1~13 Channels (Universal Domain Support)

NETWORKING SOLUTIONS

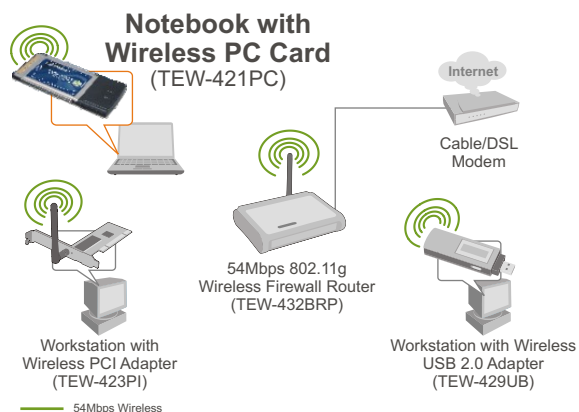

PACKAGE CONTENTS

- TEW-421PC
- Utility & Driver CD-ROM
- Multi-Language Quick Installation Guide

RELATED PRODUCTS

TEW-423PI	802.11g 54Mbps Wireless PCI Adapter
TEW-424UB	54Mbps 802.11g Wireless USB 2.0 Adapter
TEW-432BRP	54Mbps 802.11g Wireless Firewall Router

ORDERING INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

