



Wireless N PC Card TEW-641PC(V1.0R)

The Wireless N PC Card allows you to connect your laptop wirelessly with unsurpassed speed and reliability. Enjoy up to 8x the speed and 4x the coverage of a wireless g connection. Upgrade your laptop to wireless n and enjoy faster than wired speeds with a wireless connection.

Setup is a breeze with Wi-Fi Protected Setup technology. Advanced wireless encryption protects your valuable data. The latest in MIMO antenna technology ensures the fastest communication speeds that wireless n technology provides. Stream media, download files, play games and talk online when connected to a wireless n router.



FEATURES

- Wi-Fi compliant with IEEE 802.11n standard
- Backwards compatible with IEEE 802.11g and IEEE 802.11b devices
- Supports Ad-Hoc (Client-Client) and Infrastructure (AP-Client) Mode
- Supports Multiple Input Multiple Output (MIMO) technology
- Maximum reliability, throughput and connectivity with automatic data rate switching
- Supports 64/128-bit WEP, WPA/WPA2 and WPA-PSK/WPA2-PSK
- Low interference and high susceptibility guarantee reliable performance
- Wi-Fi Multimedia (WMM) Quality of Service (QoS) supported
- Compatible with Windows 7/Vista/XP/2000 operating systems
- Easy user setup and intuitive diagnostics utilities
- Coverage of up to 50 meters indoor and 100 meters outdoor *
- 3 -Year Limited Warranty.

Wireless N PC Card

TEW-641PC(V1.0R)

SPECIFICATIONS

Hardware	
Interface	• 32-Bit 3.3V CardBus Type II card
Standards	• IEEE 802.11b, IEEE 802.11g and IEEE 802.11n
LED Indicator	• PWR (power), NET (link activity)
Power Consumption	• Receive mode: 541mA (max) ; Transmit mode: 576mA (max)
Supported OS	• Windows 7 (32/64-bit), Vista (32/64-bit), XP (32/64-bit), 2000
Dimensions (LxWxH)	• 120 x 54 x 3mm (4.7 x 2.1 x 0.13 inches)
Weight	• 40g (1.4oz)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104° F); Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	• 10% ~ 90% max (non-condensing)
Certification	• CE, FCC
Wireless	
Module Technique	• DBPSK/DQPSK/CCK/OFDM (BPSK/WPSK/16-QAM/64-QAM)
Antenna	• Built-in 2 on board antennas
Frequency	• 2.412 ~ 2.484 GHz
Media Access Protocol	• CSMA/CA
Data Rate (auto fallback)	• 802.11b: up to 11Mbps • 802.11g: up to 54Mbps • 802.11n: up to 300Mbps (RX)/150Mbps(TX)
Output Power	• 802.11b: 15dBm (typical) • 802.11g: 15dBm (typical) • 802.11n: 14dBm (typical)
Receiving Sensitivity	• 802.11b: -84dBm (typical) at 11mpbs • 802.11g: -68dBm (typical) at 54Mbps • 802.11n: -65dBm at 150Mbps
Encryption	• 64/128-bit WEP (Hex & ASCII), WPA/WPA2 (TKIP/AES), WPA-PSK/WPA2-PSK
Channels	• 1~11 (FCC), 1~13 (ETSI)


*Maximum wireless signal rates are referenced from IEEE 802.11 theoretical specifications. Actual data throughput and coverage will vary depending on interference, network traffic, building materials and other conditions.



Scheda PC wireless N

TEW-641PC(V1.0R)

NETWORKING SOLUTIONS

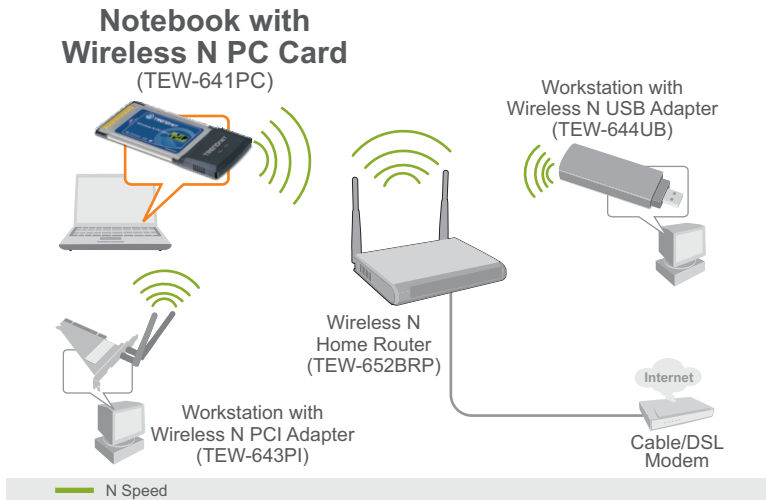

PACKAGE CONTENTS

- TEW-641PC
- Utility and driver CD-ROM
- Multi-Language Quick Installation Guide

RELATED PRODUCTS

TEW-643PI	Wireless N PCI Adapter
TEW-644UB	Wireless N USB Adapter
TEW-652BRP	Wireless N Home Router

ORDERING INFORMATION

TRENDnet[®]

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

