

TFM-560U **TRENDnet's 56K (V.90) High Speed USB Fax Modem**

Experience the fast Internet access with TRENDnet's 56Kbps (V.90) High Speed USB Fax Modem. Simply plug it into the USB port on the PC or notebook computer for easy and fast connectivity. TRENDnet's USB Fax Modem can be connected to or disconnected from the computer without turning off the system. With the highest possible data communication rates at 56Kbps/V.90, reliable error-free transmission and widespread interoperability with other users can be accomplished. TRENDnet's TFM-560U provides fast and easy installation with free communication software.



Features

- ...→ Supports V.90
- ...→ High speed 56Kbps data download and 14.4Kbps fax communication
- ...→ Industry standard protocol for data compression and error correction
- ...→ No power supply needed
- ...→ Wake-up on ring
- ...→ OnNow power management
- ...→ Low power consumption
- ...→ Worldwide country support
- ...→ Compatible with Windows 98/98(SE)/NT 4.0/ME/2000/XP
- ...→ Free Communication Software
- ...→ 5 Year Warranty

Benefits

- ...→ **User Friendly:**
Easy installation and startup can be accomplished!
- ...→ **Speed:**
The TFM-560U is capable of V.90 56,000bps download speed.
- ...→ **Economical:**
Provides low-cost connectivity to the Internet.
- ...→ **Affordable:**
TRENDnet's TFM-560U bundles with multi-language communication software in completing data and fax standards



TFM-560U

TRENDnet's 56K (V.90) High Speed USB Fax Modem

SPECIFICATIONS

Standards:

- V.90, V.34, V.32bis, V.32, , V.27ter, V.23, V.22bis, V.22, V.21, Bell 212/103

Data Compression:

- V.42bis, MNP Class 5

Error Correction:

- V.42, MNP Class 2-4

Host Interface:

- USB bus

Fax Protocol:

- Group 3 compatible, Class 1 fax: V.17, V.29, V.27ter, V.21

Fax Speed:

- 14.4K, 12K, 9600, 7200, 4800, 2400, 300

System Requirements:

- Pentium 166MMX processor (200MHz recommended), 16MB RAM/USB port/ Windows 98SE / ME/ 2000/XP

Dimensions:

- 114 x 51.8 x 25.4 mm (4.5 x 2 x 1 inches)

Operating Temp.:

- 0°C ~ 40°C (32° F ~ 104° F)

Storage Temp.:

- -20°C ~ 60°C (-4° F ~ 140° F)

Humidity:

- 10% ~ 90% non-condensing

Weight:


- 99 g (3.5 oz.)

Certifications:

- FCC, CE, CTR 21



NETWORKING SOLUTIONS

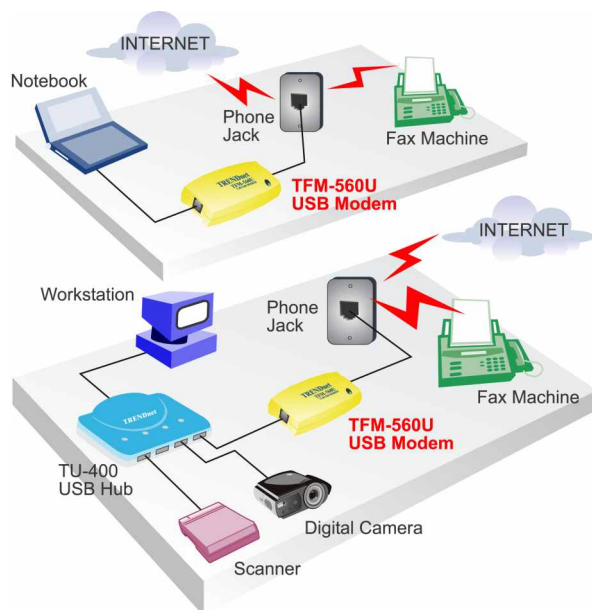

To Order Please Call:
1-888-326-6061

RELATED PRODUCT

- > **TFM-560U:**
56Kbps (V.90) High Speed USB Fax Modem
- > **TFM-560PCI:**
56Kbps (V.90) High Speed Internal Voice/Fax PCI Modem (Rockwell Chipset)
- > **TFM-560X:**
56Kbps (V.90) High Speed External Voice/Fax Modem
- > **TFM-560P:**
56Kbps (V.90) High Speed PCMCIA Fax Modem (Lucent Chipset)
- > **TFM-560E:**
56Kbps (V.90) High Speed PCMCIA Fax Modem (Cirrus Logic Chipset)

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

