



V.92 56K External Data/TAM/Fax Modem TFM-560X (YO)

TRENDnet's TFM-560X is the latest in communication innovation. The TFM-560X is V.92 fast 56Kbps data/fax modem that provides users with the highest possible data communication rates, reliable error-free transmissions, and widespread interoperability with other users. The TFM-560X also supports Group 3 fax send-and-receive functions. Free communication software and serial cable are included with the TFM-560X for quick and easy startup. TRENDnet's TFM-560X is also compatible with virtually all communication software and capable of utilizing the AT command set.

- ### FEATURES
- ITU-T V.92/V.90 Auto Detection and Auto Rate Adaptive
 - High Speed 56kbps Data Transfer Rate with Maximum Degree of Interoperability
 - V.44 and V.92 Features Support Quick Connect, PCM Upstream and Modem On Hold
 - Robust Hardware Component Supports Software-Only Upgrades
 - Supports High Speed Analog Data and High Speed Fax
 - Fax Transfer Rate up to 14.4 kbps with ITU-T T.31 Fax Standard
 - Built-in RS-232 Serial Interface for Connection
 - Compatible with Windows 95/98/ME/2000/XP/2003/Vista
 - Supports TAM (Telephone Answering Machine) for Remote Message Retrieval
 - Free Communication Software
 - 3-Year Warranty

V.92 56K External Data/TAM/Fax Modem


TFM-560X (YO)

SPECIFICATIONS

Hardware	
Standards (Compatible with ITU and Bell Standards)	<ul style="list-style-type: none"> V.92 56 Kbps ITU standard V.90 56 Kbps ITU standard V.34 33.6 Kbps ITU standard V.32bis, V.32, V.22bis, V.23, V.21, Bell 212A, Bell 103
Error Correction	<ul style="list-style-type: none"> V.42, LAP-M & MNP 2-4
Data Compression	<ul style="list-style-type: none"> V.44, V.42bis & MNP5
Fax	<ul style="list-style-type: none"> ITU-T T.31 Fax Send and Receive V.17, V.29, V.27ter, and V.21 ch2 EIA/TIA-578 Fax Class1 Command
PC Telephony	<ul style="list-style-type: none"> International Telephony Support ITU-T V.250 AT Command Set
Supported Features	<ul style="list-style-type: none"> Data/Fax Call Discrimination Call Progress
Supported OS	<ul style="list-style-type: none"> Windows 95/98(SE)/ME/2000/XP/2003 Server/Vista, Mac OS and Linux
Interface	<ul style="list-style-type: none"> PC: RS-232 PSTN: RJ11 (Telephone Line)
Power	<ul style="list-style-type: none"> 9V AC, 1000mA External Power Adapter
Power Consumption	<ul style="list-style-type: none"> 995mW (max)
Dimension (Lx W x H)	<ul style="list-style-type: none"> 153 x 109 x 29mm (6 x 4.3 x 1.1 inches)
Weight	<ul style="list-style-type: none"> 200g (7 oz.)
Temperature	<ul style="list-style-type: none"> Operating : 0°~ 50°C (32°~ 122°F) Storage : -20°~ 60°C (-4°~ 140°F)
Humidity	<ul style="list-style-type: none"> 10 ~ 90% (Non-Condensing)
Certification	<ul style="list-style-type: none"> FCC, CE

NETWORKING SOLUTIONS

V.92 56K External Data/Voice/Fax Hardware Modem (TFM-560X)

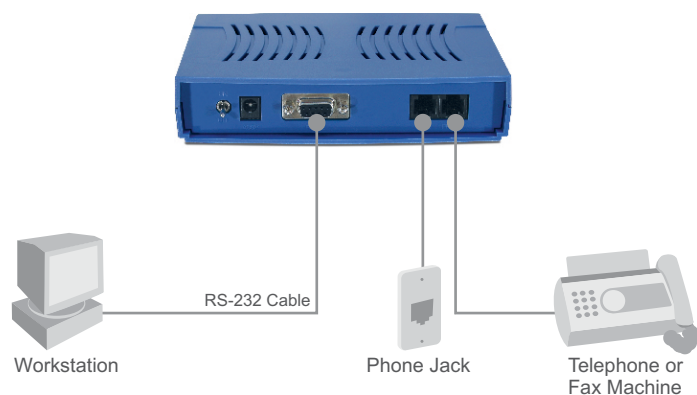

PACKAGE CONTENTS

- TFM-560X
- Quick Installation Guide
- Software & User's Guide CD-ROM
- Power Adapter (9VAC, 1000mA)
- 1 x RJ11 Telephone Cable
- 1 x RS-232 Serial Cable

RELATED PRODUCTS

TFM-PCIV92A	56K (V.92) High Speed Internal PCI Data/Fax/TAM Modem
TFM-560U	56K (V.92) High Speed USB 2.0 Data/Fax/TAM Modem
TFM-560X	V.92 56K External Data/FAX/TAM Modem

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

