

TFM-CF56 **CompactFlash 56K Fax Modem Card**

TRENDnet's TFM-CF56 CompactFlash 56K Fax Modem Card is the latest in communication innovation. Designed with an integrated RJ-11 connector for telephone line connection, this CompactFlash Fax Modem is the easiest and fastest way to connect to the Internet. Designed for Pocket PC / Windows CE-base palm sized hand-held PCs, you can just insert the card and then dial-up to ISP for accessing Internet and e-mails. With the "Hot Swap" option, TRENDnet's TFM-CF56 provides easy installation and configuration for your dial-up applications.



FEATURES

- ...→ Small form factor integrates into mobile and handheld platforms
- ...→ XpressPort design, with integrated RJ11 phone connector into the card. No moving parts to break and no media coupler to lose
- ...→ Complies with CF+/CompactFlash Rev. 1.4
- ...→ Designed for Windows CE handheld devices to connect to Internet
- ...→ Plug and Play device for easy installation and configuration
- ...→ "Hot Swap" card insertion and removal
- ...→ Low power consumption with 3.3V operation
- ...→ Auto-step downward compatibility for connection
- ...→ 3 Year Warranty

BENEFITS

- ...→ **User Friendly:**
Easy installation with "Hot-Swap" card insertion and removal.
- ...→ **Economical:**
Xpress Port design that integrates RJ11 phone connector into the card. No moving parts to break and no media coupler to lose.
- ...→ **Flexible:**
Supports most modem/Fax standards and negotiates connection speed between 300bps and 56Kbps.
- ...→ **Performance:**
Surfs the Internet with speed up to 56Kbps



TFM-CF56

CompactFlash 56K Fax Modem Card

SPECIFICATIONS

Card Type:

- CF+ / CompactFlash Rev. 1.4

Modem Standards:

- Hayes AT Command Set, V.90, K56Flex, V.34+, V.34, V.32bis, V.32, V.23, V.22bis, V.22/Bell 212A, V.21/Bell 103

Fax Standards:

- Group III, V.29, V.27ter, V.21 Channel 2, V.17, EIA Class 1 Commends

Error Control:

- V.42, MNP Class 2-4

Data Compression:

- V.42bis, MNP 5

Dialing Methods:

- Tone and Pulse

Operation Modes:

- Asynchronous, Full Duplex, Automatic and Manual Call Originate, Automatic and Manual Answer

Power Consumption:

- Active Mode: 140mA
- Sleep Mode: 90mA

Dimensions:

- 88 x 42 x 15 mm (3.46 x 1.65 x 0.59 inch)

Temperature:

- Operating: 0° - 55° C (32° - 131° F)
- Storage: -25° - 70° C (-13° - 158° F)

Humidity:


- 10% - 90% (no-condensing)

Certification:

- FCC Class B, CE



NETWORKING SOLUTIONS

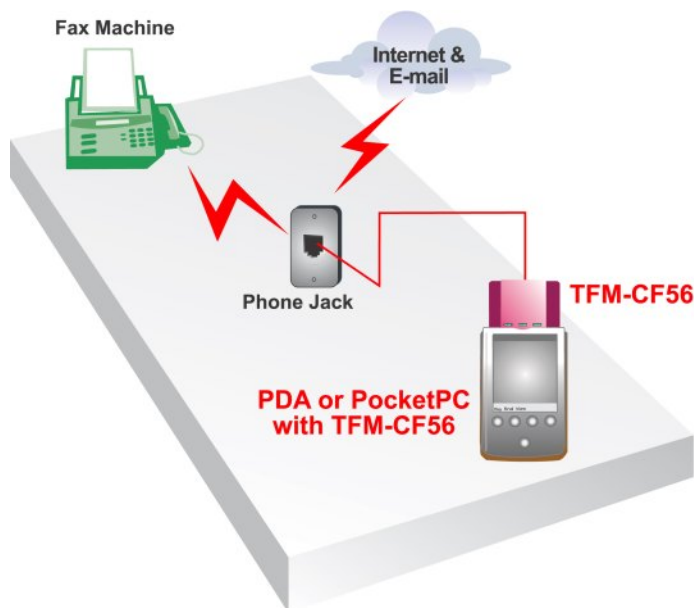

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

*** **TFM-CF56**
CompactFlash 56K Fax Modem Card

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA