

## 56K PCI Data/Fax/TAM Modem TFM-PCIV92A (V1.2R)

The TFM-PCIV92A Internal PCI Fax Modem with Agere Chipset delivers faster access to the Internet for more efficient upload and downloads. The V.92/V.90 standard modem provides you with the highest possible data transfer rates and reliable fax transmissions. The modem complies with the latest V.92 standard, which provides Quick Connect, Modem-on-Hold, and 48Kbps Upload Rate features for your Internet connection. TFM-PCIV92A delivers quick and easy installation with free communication software. Save money and surf faster with TRENDnet's TFM-PCIV92A.

## FEATURES

- Compliant with V.92, V.90, V.44 Standards
- Supports V.44 and V.92 Quick Connect, PCM Upstream and Modem On Hold Features
- Up to 56Kbps Data Download, 48Kbps Data Upload
- Supports TAM (Telephone Answering Machines) via sound card
- Supports Group III, Class 1 Fax with Fax Transfer Rate up to 14.4kbps (T.31 Protocol)
- Compatible with Windows 7(32/64-bit)/Vista(32/64-bit)/XP(32/64-bit)/2000/ME/98SE operating system
- AT commands for data and Class 1 Fax
- ACPI Power Management with PME pin supply for Low Power Consumption
- Free Communication Software
- 3-Year limited warranty

# 56K PCI Data/Fax/TAM Modem

TFM-PCIV92A (V1.2R)

## SPECIFICATIONS


### HARDWARE

<b>Interface</b>	<ul style="list-style-type: none"><li>• PC: PCI Specification 2.2</li><li>• PSTN: RJ-11</li></ul>
<b>Data Mode</b>	<ul style="list-style-type: none"><li>• V.92 &amp; V.90, V.34, V.32(bis), V.22(bis), V.23, V.21, Bell 212A, Bell 103</li></ul>
<b>Error Correction</b>	<ul style="list-style-type: none"><li>• V.42, LAPM &amp; MNP 2-4</li></ul>
<b>Data Compression</b>	<ul style="list-style-type: none"><li>• V.44, V.42(bis) &amp; MNP5</li></ul>
<b>Fax Mode</b>	<ul style="list-style-type: none"><li>• Group III Send &amp; Receive, ITU-T V.17, V.29, V.27ter and V.21 ch2</li></ul>
<b>Power Management</b>	<ul style="list-style-type: none"><li>• ACPI Power Manager Registers</li><li>• PME# pin and APM Support</li></ul>
<b>Power Consumption (Input 3.3VDC)</b>	<ul style="list-style-type: none"><li>• Sleep Mode: 25mW</li><li>• Idle Mode: 200mW</li><li>• Operating Mode: 300mW</li></ul>
<b>Dimensions</b>	<ul style="list-style-type: none"><li>• 133 x 124 x 21mm (5.2 x 4.8 x 0.8 inches)</li></ul>
<b>Weight</b>	<ul style="list-style-type: none"><li>• 55g (1.94 oz)</li></ul>
<b>Temperature</b>	<ul style="list-style-type: none"><li>• Operating: 0°~ 55°C (32°~ 131°F)</li><li>• Storage: -20°~ 60°C (-4°~140°F)</li></ul>
<b>Humidity</b>	<ul style="list-style-type: none"><li>• 10%~90% (non-condensing)</li></ul>
<b>Certifications</b>	<ul style="list-style-type: none"><li>• CE, FCC</li></ul>

### FUNCTIONS

<b>Supported OS</b>	<ul style="list-style-type: none"><li>• Windows® 8.1, 8, 7, Vista, XP Mac OS® 10.4-10.9</li></ul>
<b>Multiple Country</b>	<ul style="list-style-type: none"><li>• Call Progress, Blacklisting Support</li></ul>
<b>Other</b>	<ul style="list-style-type: none"><li>• Data/Fax Call Discrimination</li><li>• Single Profile Stored in Host</li><li>• Modem and Audio Paths Concurrent Across PCI Slot</li><li>• DTMF</li></ul>

## NETWORKING SOLUTIONS

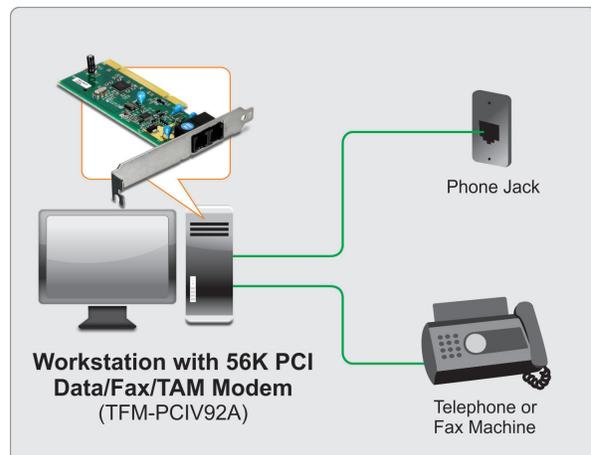

## PACKAGE CONTENTS

TFM-PCIV92A

Multi-Language Quick Installation Guide

CD-ROM (Driver & User's Guide)

RJ-11 Telephone Cable

## RELATED PRODUCTS

<b>TFM-560X</b>	56K External Data/Fax/TAM Modem
<b>TFM-561U</b>	56K USB Phone/Internet/Fax Modem

## CONTACT INFORMATION

**TRENDnet**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**1-888-326-6061**

