



TFU-430 **7-Port USB2.0/FireWire Combo Hub**

This 7-Port USB 2.0/FireWire Combo Hub provides four USB 2.0 ports and three IEEE 1394 FireWire ports to your USB/FireWire-Enabled Desktop or Laptop PC.



FEATURES

- Compliant with USB 2.0, USB 1.1 and FireWire IEEE 1394 Specifications
- Supports USB High-Speed Transfer Rate up to 480 Mbps
- Supports IEEE 1394 Transfer Rate up to 400Mbps
- Supports USB Over-Current Detection and Individual/Gang Power Control
- High Speed Detection Indicator Output
- Supports Multiple tiers with up to 127 USB Devices and up to 63 FireWire Devices
- Compliant with Windows 98SE/ME/2000/XP
- Supports Bus-Power or Cable-Power with Power Adapter
- Compatible with USB 2.0/1.1 and FireWire enabled Pcs
- Supports Plug & Play and Easy Installation
- 2-Year Warranty



TFU-430

7-Port USB2.0/FireWire Combo Hub

SPECIFICATIONS

Interface:

- USB 2.0 and FireWire

Standards:

- USB 2.0, 1.1 and FireWire IEEE 1394

Port:

- 1 x USB 2.0 Type B Port (Uplink)
- 4 x USB 2.0 Type A Ports
- 3 x FireWire Ports

Driver Compliant:

- Windows 98SE/ME/2000/XP
- Mac OS 8.6/9.x/10.x

LED:

- Power : USB & FireWire
- USB : Link Activity

Dimension (LxWxH):

- 106.5 x 63 x 41.5mm (4.2 x 2.48 x 1.6 inches)

Weight:

- 145g (3.2lb)

Power Adapter (Switching):

- Input: 100~240V ~ 50/60Hz
- Output: 12V DC, 2.5A

Power Consumption:

- 500mA (max)

Temperature:

- Operating: 0° ~ 40° C (32° ~ 104° F)
- Storage: -10° ~ 45° C (14° ~ 113° F)

Humidity:

- 85% (Non-Condensing)


Certifications:

- FCC, CE



NETWORKING SOLUTIONS

7-Port USB 2.0/FireWire Combo Hub (TFU-430)

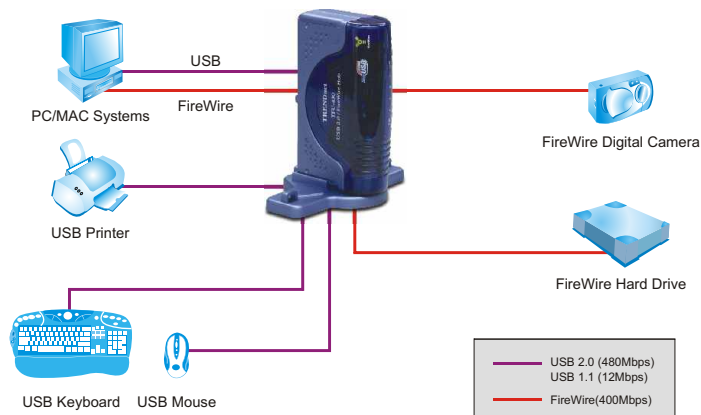

To Order Please Call:
1-888-326-6061

RELATED PRODUCT

- ➡ **TMR-61U2:** USB 2.0 6-in-1 Memory Card Reader/Writer
- ➡ **TU2-ET100:** Hi-Speed USB to Fast Ethernet Adapter
- ➡ **TU2-ET200:** USB 2.0 Mobile Docking Station

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA