




## 16-Port Rackmount KVM Switch

TK-1603R (v2.0R)

- Controls up to 16 computers or servers
- Console port supports both USB and PS/2 for keyboard and mouse interfaces
- USB only for PC side mouse and keyboard connections
- Supports Windows®, Linux®, Mac OS® and more
- Supports up to 2048 x 1536 VGA resolution
- Auto-scan for monitored PCs with adjustable scan interval from 10-99 seconds
- Keyboard status restored when switching between computers
- LEDs display for easy status monitoring
- Audio notification for port switching confirmation (enable/disable)
- Keyboard hot-key command or push button switching
- Plug & Play and Hot-Pluggable
- Required cabling sold separately (TK-CU06 / TK-CU10 / TK-CU15)
- Standard 19" (1U) rackmount design
- 2 year warranty

TRENDnet's 16-Port Rackmount VGA KVM Switch, model TK-1603R, lets you manage multiple computers with just one set of keyboard, monitor, and mouse. This rackmount KVM switch supports USB and PS/2 interface on the console side, and USB only on the PC side. Popular hardware platforms such as Windows, Linux, and Mac are supported. Users can switch between PCs using hot-key or push button for flexible management. Users can also hot-plug PCs on the fly to avoid downtime. The 16-Port Rackmount KVM Switch is the perfect choice for managing multiple PC's.




### KVM Interface

USB and PS/2 interface on the console side and USB only on the PC side mouse and keyboard connections.



### Video Resolution

Supports up to 2048 x 1536 VGA resolution.




### 16-Port KVM

Manage up to 16 computers with this rackmount KVM switch.

## NETWORKING SOLUTION



Front panel push buttons

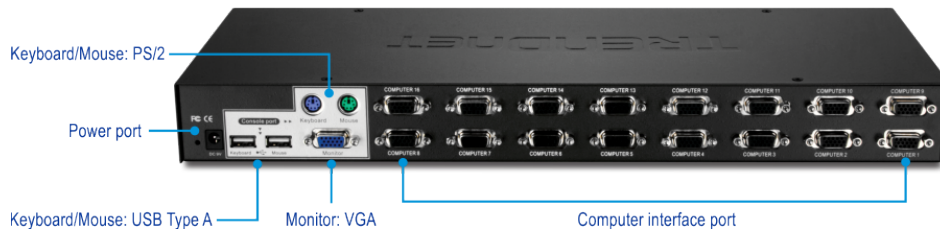

Keyboard/Mouse: PS/2

Power port

Keyboard/Mouse: USB Type A

Monitor: VGA

Computer interface port

## FEATURES



### 16-Port KVM

Manage up to 16 computers with this rackmount KVM switch



### VGA Monitor

Designed to connect to a monitor's VGA port



### Video Resolution

Supports up to 2048 x 1536 VGA resolution



### USB and PS/2 Console Support

Supports both USB and PS/2 console connections



### USB Client Interface Support

USB PC-side interface supports USB only for mouse and keyboard connections to each computer (cables sold separately, TK-CU06/TK-CU10/TK-CU15)



### OSD

On Screen Display (OSD) interface for efficient management



### Rackmount Design

Sturdy metal 19" rackmount design



### Hot Keys

Hot-key commands available

## SPECIFICATIONS

### Console Port Connectors

- Keyboard: USB Type A, PS/2
- Mouse: USB Type A, PS/2
- Monitors: VGA

### Computer Interface (up to 16)

- Keyboard/Mouse: USB Type A
- Monitors: VGA

### Monitor Resolution

- 2048 x 1536

### Switching Control

- Front panel push buttons
- Keyboard hot key commands

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 80 % non-condensing

### Power

- Input: 100 - 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 1A external power adapter
- Max. consumption: 0.7W

### Dimensions

- 407 x 165 x 45mm (16 x 6.5 x 1.8 in.)

### Weight

- 2kg (4.5 lbs.)

### Certifications

- CE
- FCC

### Warranty

- 2 year

### Package Contents

- TK-1603R
- Quick Installation Guide
- Power adapter (9V DC, 1A)
- Rackmount kit