



## 2-Port PS/2 KVM Switch TK-205K

The 2-Port PS/2 KVM Switch lets you manage two PC's with just one set of keyboard, monitor, and mouse. Switch between two PC's with a simple press of a button! Separate sets of KVM cables are included with the KVM Switch, so users can start controlling 2 PC's instantly. The KVM cables also provide power to the KVM Switch, eliminating the need for a power adapter. Hot Key operations provide immediate access to features such as computer switching, and auto-scanning. With its Hot-Plug and Audible Feedback, the 2-Port PS/2 KVM Switch is the perfect choice for managing multiple PC's.

### FEATURES

- Use one keyboard, monitor, and mouse to control two computers
- PS/2 Keyboard/Mouse emulation
- 2-Port KVM switch in compact size design with 2 sets of 3 to 1 KVM Cables
- Support Microsoft Intellimouse, Optical Mouse, Logitech Net Mouse and more
- Support very High Video Quality, up to 300MHz 2048 x 1536 VGA resolution
- No software required, easy PC selection via Push Button and Hot-Key Commands
- Support High Video Quality, up to 300MHz 2048 x 1536 VGA, or up to 800 x 600 SVGA resolution
- Hot-Plug feature, add PC or remove the connected PC for maintenance without powering down the KVM Switch or other PC's.
- Auto-Scan Mode for monitoring PC's.
- Keyboard status restored when switching between PC's.
- LED display for easy status monitoring
- Beeping sound for port switching confirmation
- 2-Year Warranty


# 2-Port PS/2 KVM Switch

## TK-205K

### SPECIFICATIONS

Hardware	
Computer Connections	• 2
KVM Cable	• 2 Sets of 1.2M (4ft) KVM Cables
Cable Interface (all male)	• To Console: 1 x VGA/SVGA HDB 15-pin • To PC: - 1 x PS/2 Mouse 6-pin Mini Din - 1 x PS/2 Keyboard 6-pin Mini Din - 1 x VGA/SVGA HDB 15-pin
Console (all female)	• 1 x PS/2 Mouse 6-pin Mini Din • 1 x PS/2 Keyboard 6-pin Mini Din • 1 x VGA/SVGA HDB 15-pin
Port Selection	• Push Buttons and Hot-Key Commands
Auto-Scan Interval	• 10 seconds
Keyboard State	• Saved and Restored
Power Type	• PS/2 Interface Power
Dimensions	• 95 x 65 x 30 mm (3.7 x 2.6 x 1.2 in.)
Weight	• 85 g (3 oz)
Temperature	• Operating: 0°C ~ 40°C (32°F ~104°F) • Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	• 0%~80%, Non-Condensing
Certifications	• CE, FCC

### NETWORKING SOLUTIONS

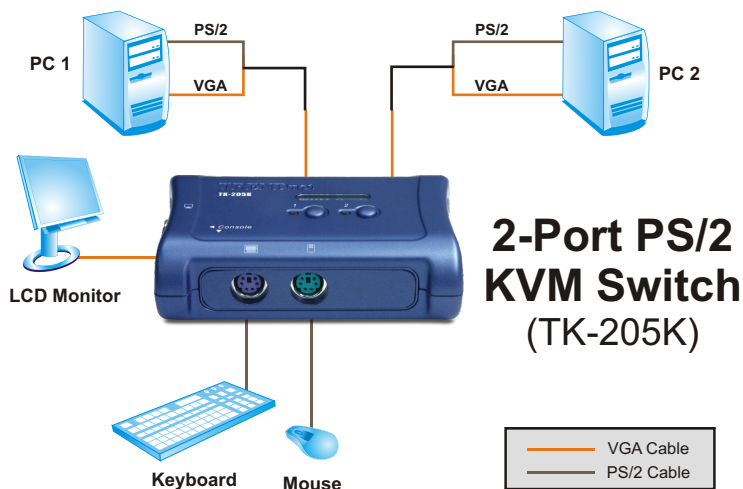

### PACKAGE CONTENTS

- TK-205K
- Multi-Language User's Guide
- 2 sets of KVM Cables

### RELATED PRODUCTS

TK-205K	2-Port PS/2 KVM Switch
TK-207K	2-Port USB KVM Switch
TK-210K	2-Port USB Hub and PS/2 KVM Switch with Audio

### ORDERING INFORMATION

#### TRENDnet

3135 Kashiwa Street, Torrance, CA 90505 USA  
 Tel: 1-888-777-1550  
 Fax: 310-891-1111  
 Web: [www.trendnet.com](http://www.trendnet.com)  
 Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

