

TK-205i

TRENDuret TRENDware, USA What's Next in Networking

2-Port KVM Switch with Integrated Cables

TRENDnet TK-205i 2-Port KVM Switch Kit lets you manage two PC's with just one set of keyboard, monitor, and mouse. Switch between the PC's with a simple press of a button! The KVM cables are built into the TK-205i so users can start controlling 2 PC's instantly. The TK-205i is a self-powered KVM Switch loaded with friendly features. With its Hot-Plug, Auto-Scan, Audible Feedback, and Hot-Key operations, the TK-205i is the perfect choice for managing multiple PC's.



FEATURES

- ••• Use one keyboard, monitor, and mouse to control two computers
- --- PS/2 Keyboard/Mouse emulation
- --- 2-Port KVM switch in compact size design
- --- 2 sets of KVM Cables are integrated into the unit
- --- Support Microsoft Intellimouse, Optical Mouse, Logitech Net Mouse...etc.
- *** Support very High Video Quality, up to 1920 x 1440 with 200Mhz bandwidth
- No software required, easy PC selection via Push Button and Hot-Key Commands
- --- Support DOS, Windows 3.x/95/98/ME/NT/2000/XP, Netware, Unix, Linux, and more
- ·-- Hot-Plug feature, add PC or remove the connected PC for maintenance without powering down the KVM Switch or other PC's.
- --- Auto-Scan Mode for monitoring PC's.
- *** Keyboard status restored when switching between PC's.
- *** LED display for easy status monitoring
- --- Beeping sound for port switching confirmation
- --- 1-Year Warranty

BENEFITS

--- Integration Friendly

Does not require driver/software for the installation and operation. Switching between PCs with the push button or Hot-Key commands.

···* Flexible

Hot-Plug feature, add PC's or remove connected PC's without powering off the KVM switch or the other PC's.

→ Cost Effective

Manage two PC's with single keyboard, monitor, and mouse. Save on equipment cost, utility, and space.

--- Performance

Support very High Video Quality up to 1920 x 1440 with 200Mhz bandwidth. Keyboard status is saved for each PC.

2-Port KVM Switch with Integrated Cables

SPECIFICATIONS

Computer Connections:

• 2

Port Connectors:

• Keyboard & Mouse: PS/2 type 6-pin mini Din. Monitor: 15-pin HDDB type

KVM Cable:

 2 sets of high-grade KVM cables (UL2919 for VGA monitor).

Length:

• 1.4 meters (4.6 feet)

Console Port:

Port Selection:

Push Button

Auto-Scan Intervals:

4 seconds

Switching Confirmation:

Beeping sound

Keyboard State:

Saved and restored

Power Supply:

 Draw power from computer's keyboard port.

Dimensions:

• 102 x 63 x 30 mm (4.02 x 2.48 x 1.18 inches)

Weight:

• Appro. 315 g. (11.1 Oz.)

Temperature:

• Operating: 0° ~ 40°C (32° ~104°F) • Storage: -20° ~ 60°C (-4° ~ 140°F)

Humidity:

• 0%~80%, Non-Condensing

Certifications:


• FCC. CE







ETWORKING SOLUTIONS

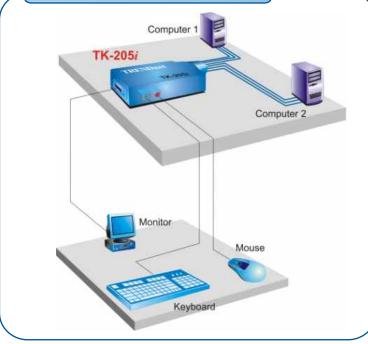

To Order Please Call: 1-888-326-6061

RELATED PRODUCT

*** TK-200K: 2-Port KVM Switch Kit

*** TK-205i: 2-Port KVM Switch with Integrated Cables

*** TK-400K: 4-Port KVM Switch

*** TK-401R: 4-Port Rack-Mountable KVM Switch

*** **TK-800R**: 8-Port KVM Stackable Rack-Mountable Switch (with OSD)

*** TK-801R: 8-Port Rack-Mountable KVM Switch

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street Torrance, CA. 90505. USA Tel: 310-891-1100 Fax: 310-891-1111

Web: www.TRENDNET.com Email: sales@trendware.com

