



4-Port PS/2 KVM Switch Kit TK-400K (B1.3R)

The TK-400K 4-Port KVM Switch allows you to manage up to 4 PCs with just one keyboard, monitor, and mouse. Switch between PC's with a simple press of a button! With its Hot-Plug, Auto-Scan, Audible Feedback, and Hot-Key operations, the TK-400K is the perfect choice for managing multiple PCs.

FEATURES

- Manage up to 4 computers/servers with one set of console devices
- PS/2 Keyboard/mouse emulation with 4 sets of detachable KVM cables.
- Compliant with Dos, Windows 98SE/ME/2000/XP/Vista, Unix, Linux and more
- High video quality, up to 2048 x 1536 resolution
- Auto-Scan and LED display for computer monitoring
- Computer selection by face panel push buttons or keyboard hot key commands
- Keyboard status restored when switching between computers
- Plug & Play and hot-pluggable
- 2-year limited warranty




SPECIFICATIONS

HARDWARE	
Connections	<ul style="list-style-type: none">• 4 computers
KVM Cable	<ul style="list-style-type: none">• 2 sets of 1.2M (4ft.) PS/2 kvm cable• 2 sets of 1.8M (6ft.) PS/2 kvm cable
Cable Interface (all male)	<ul style="list-style-type: none">• To KVM<ul style="list-style-type: none">• 1 x PS/2 keyboard 6-pin mini din• 1 x PS/2 mouse 6-pin mini din• 1 x VGA/SVGA HDB 15-pin• To Computer<ul style="list-style-type: none">• 1 x PS/2 keyboard 6-pin mini din• 1 x PS/2 mouse 6-pin mini din• 1 x VGA/SVGA HDB 15-pin
PC Port Connectors (all female)	<ul style="list-style-type: none">• 4 x PS/2 keyboard 6-pin mini din• 4 x PS/2 mouse 6-pin mini din• 4 x VGA/SVGA HDB 15-pin
Console Port Connectors (all female)	<ul style="list-style-type: none">• 1 x PS/2 keyboard 6-pin mini din• 1 x PS/2 mouse 6-pin mini din• 1 x VGA/SVGA HDB 15-pin
Computer Selection	<ul style="list-style-type: none">• Face panel push buttons or keyboard hot key commands
Auto-Scan Interval	<ul style="list-style-type: none">• 4 seconds
Keyboard State	<ul style="list-style-type: none">• Save and restore
Power Type	<ul style="list-style-type: none">• PS/2 Interface power
Power Supply	<ul style="list-style-type: none">• 9VDC, 500mA optional external power adapter (not included.)
Dimensions	<ul style="list-style-type: none">• 192 x 81 x 31mm (7.5 x 3.2 x 1.2in.)
Weight	<ul style="list-style-type: none">• 240g (8.5oz.)
Temperature	<ul style="list-style-type: none">• Operating: 0°C ~ 40°C (32°F ~104°F)• Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	<ul style="list-style-type: none">• 0%~80%, non-condensing
Certifications	<ul style="list-style-type: none">• CE, FCC

4-Port PS/2 KVM Switch Kit TK-400K (B1.3R)



NETWORKING SOLUTIONS

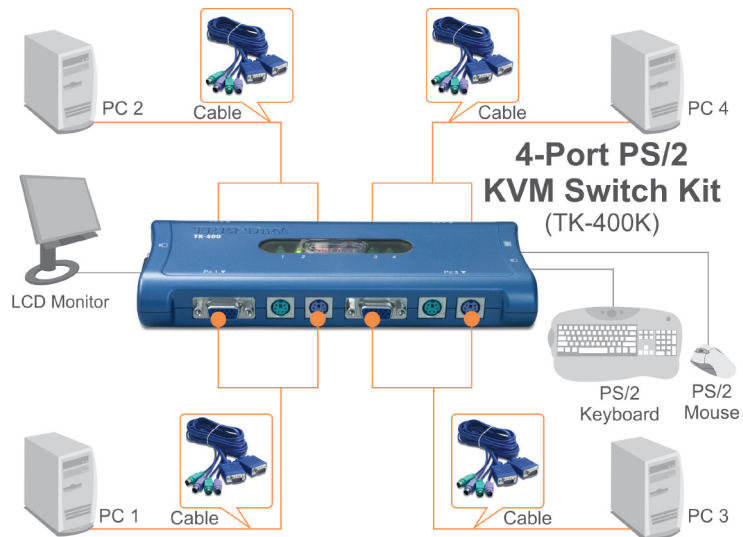

PACKAGE CONTENTS

TK-400
Multi-Language Quick Installation Guide
2 sets of PS/2 KVM cables (1.2M/4ft)
2 sets of PS/2 KVM cables (1.8M/6ft)

RELATED PRODUCTS

TK-208K	2-Port PS/2 KVM Switch Kit w/ Audio
TK-408K	4-Port PS/2 KVM Switch Kit with Audio
TK-407K	4-Port USB KVM Switch Kit

CONTACT INFORMATION



20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

