



4-Port USB KVM Switch Kit TK-407K (v1.2R)

The 4-Port USB KVM Switch lets you manage four PC's with just one set of keyboard, monitor, and mouse. Switch between 4 PC's with a simple press of a button! Separate sets of KVM cables are included with the KVM Switch, so users can start controlling 4 PC's instantly. The KVM cables also provide power to the KVM Switch, eliminating the need for a power adapter. Hot Key operations provide immediate access to features such as computer switching, and auto-scanning. With its Hot-Plug, and Audible Feedback, the 4-Port USB KVM Switch is the perfect choice for managing multiple PC's.

FEATURES

- Manage up to 4 computers/servers with one set of console devices
- USB keyboard/mouse emulation with 4 sets of detachable KVM cables
- Compliant with Windows 98SE/ME/2000/XP/2003 Server/Vista, Linux, and Mac OS
- High video quality, up to 2048 x 1536 VGA resolution
- Multi-platform support for PCs, Macintosh G3/G4/G5, iMac and Mac Mini
- Auto-Scan and LED display for computer monitoring
- Keyboard status restored when switching between computers
- Computer selection by front panel push buttons, keyboard hot key commands or Windows-based client switching software
- User definable hot key (Windows only)
- Plug & Play and hot-pluggable
- USB interface power method
- 2-year limited warranty




SPECIFICATIONS

HARDWARE

Connections	• 4 computers
USB Interface	• USB 1.1 compliant
KVM Cable	• 2 sets of 1.2m (4ft.) USB KVM Cables • 2 sets of 1.8m (6ft.) USB KVM cables
Cable Interface (all male)	• To KVM • 1 x VGA/SVGA HDB 15-pin • To Computer • 1 x USB (Type A) • 1 x VGA/SVGA HDB 15-Pin
PC Port Connectors	• 4 x USB/SVGA HDB 15-pin (female)
Console Port Connectors	• 2 x USB keyboard/mouse (type A) • 1 x VGA/SVGA 15-pin HDB (female)
PC Selection	• Face panel push buttons, keyboard hot key commands or Windows-based client switching software
Auto-Scan Interval	• 10 seconds
Keyboard State	• Save and restore
Power Type	• USB interface power
Dimensions	• 167 x 80 x 28 mm (6.6 x 3.2x 1.1 in.)
Weight	• 159 g (5.6 oz.)
Temperature	• Operating: 0°C ~ 40°C (32°F ~104°F) • Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	• 0%~90%, non-condensing
Certifications	• CE, FCC

NETWORKING SOLUTIONS

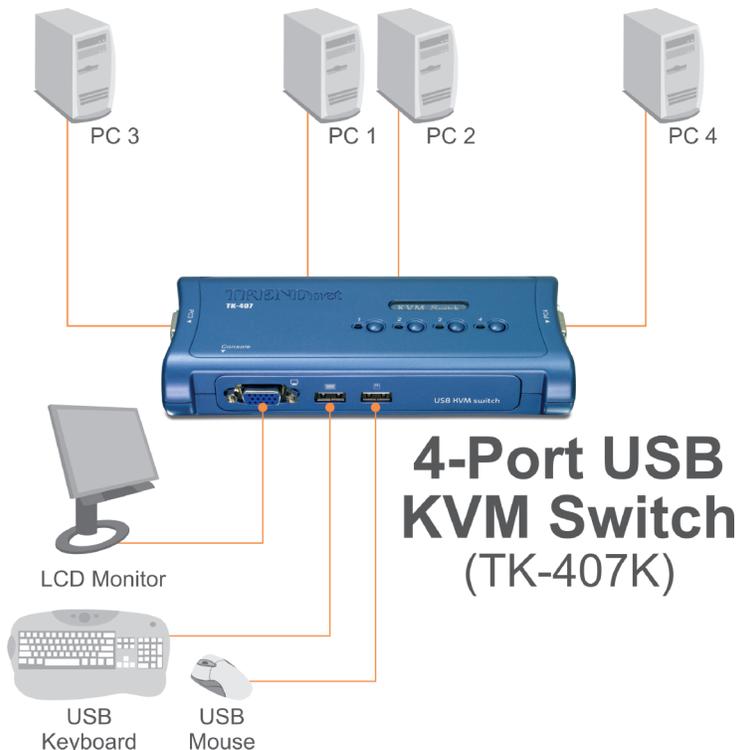

PACKAGE CONTENTS

- TK-407K
- Multi-Language Quick Installation Guide
- CD-ROM (Utility)
- 4 sets of USB KVM Cables (2 x 1.2m/4ft., 2 x 1.8m/6ft.)

RELATED PRODUCTS

TK-200K	2-Port PS/2 KVM Switch Kit
TK-207K	2-Port USB KVM Switch Kit
TK-408K	4-Port PS/2 KVM Switch Kit with Audio

CONTACT INFORMATION



20675 Manhattan Place, Torrance, CA 90501 USA
Tel: 1-310-961-5500
Fax: 1-310-961-5511
Web: www.trendnet.com
Email: sales@trendnet.com
1-888-326-6061

