



4-Port USB PS/2 KVM Switch Kit TK-423K

The 4-Port USB PS/2 KVM Switch Kit with Audio (TK-423K) provides control of 4 computers/servers with just one set of console controls.

Manage 4 computers that have open VGA and PS/2 or USB ports at the touch of a button with one set of PS/2 or USB keyboard and mouse, VGA monitor, microphone and speakers.

No need for additional cabling, all required cables are included. Independent audio/mic and PC port selection provide additional flexibility. LED indicators show connection status and a buzzing sound confirms port switching. With Hot-Plug, Auto-Scan and Hot-Key operating features, this versatile device is the perfect choice for managing 4 computers/servers.

FEATURES


- Manage up to 4 computers/servers with one set of console devices
- All required cabling included
- Cables from the KVM switch to the computers/servers feature VGA and PS/2 connectors
- Supported console connections are as follows: PS/2 or USB keyboard and mouse ports, VGA monitor port and speaker/mic port
- Audio and microphone support
- Audio/mic port selection may be independent of keyboard, video and mouse port selection
- Control computer/server selection with front push buttons and keyboard hotkeys
- Supports Universal Host and Open Host Controller Interface (UHCI/OHCI)
- Multiple platforms supported: Windows 7/Vista/2003 Server/ XP/2000/ME/98SE, Mac OS, Linux and more
- Port switching confirmed by LED status indicators and audio tone
- High quality VGA resolution up to 2048 x 1536
- 2-year limited warranty

4-Port USB PS/2 KVM Switch Kit TK-423K

SPECIFICATIONS

| Hardware | |
|-------------------------|--|
| Connection | • 4 computers |
| PC Port connection | • 4 x VGA HDB 15-pin female • 4 x 3.5mm speaker in/out jack • 4 x 3.5mm microphone in/out jack |
| Console port connectors | • 2 x USB 1.1 type A for keyboard/ mouse • 1 x PS/2 keyboard 6-pin mini DIN female • 1 x PS/2 mouse 6 pin mini DIN female • 1 x VGA HDB 15 pin female • 1 x 3.5mm speaker in/out jack • 1 x 3.5mm microphone in/out jack |
| KVM Cables | • 4 x KVM Multiple Connection Cable (2 x 1.2m/4ft., 2 x 1.8m/6ft) • 4 x KVM speaker/Microphone Cable (2 x 1.2m/4ft., 2 x 1.8m/6ft) |
| Cable Interface | • 1 x VGA 15 pin male to male connector • 1 x USB type A connector • 1 x PS/2 Connector (Keyboard connector) • 1 x USB to PS/2 Gender Connector (Support for PS/2 Mouse) |
| PC selection | • Hotkey/ push button |
| LED | • 4 x LED Green |
| Auto Scan Interval | • Programmable 5-99 seconds |
| VGA Resolution | • 2048 x 1536 |
| Power Adapter | • 5V DC 2A external power adapter |
| Dimensions (L x W x H) | • 255 x 117.5 x 45 mm (10.039 x 4.606 x 1.771 inches) |
| Weight | • 1000 g (35.2 oz.) |
| Temperature | • 0C° ~ 40C° (32F° ~104F°) |
| Humidity | • Max 90%, non-condensing |
| Certifications | • CE, FCC |

NETWORKING SOLUTIONS

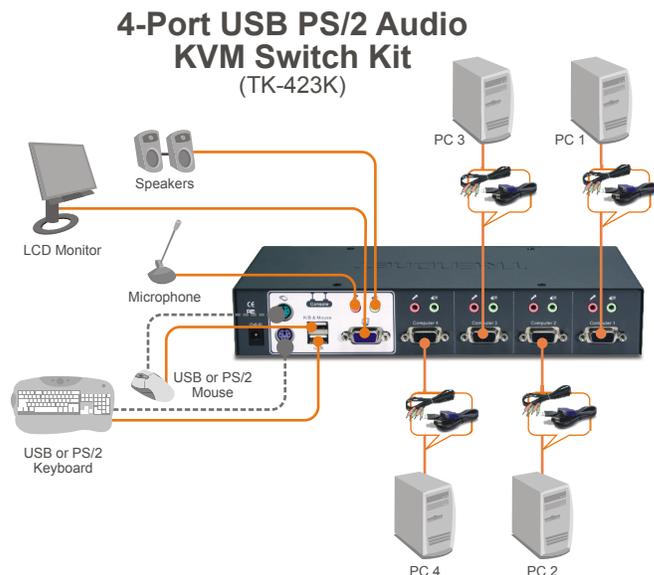

PACKAGE CONTENTS

- TK-423K
- Multi-language quick installation guide
- 4 sets of KVM Multiple Connection Cable (2 x 1.2M/4ft, 2 x 1.8M(6ft.)
- 4 sets of KVM Audio/Microphone Cable (2 x 1.2M/4ft, 2 x 1.8M(6ft.)
- Power adapter (5V DC, 2A)

RELATED PRODUCTS

| | |
|----------|--------------------------------------|
| TK-401R | 4-Port Rack Mount KVM Switch |
| TK-403KR | 4-Port Audio KVM Switch |
| TK-409K | 4-Port USB KVM Switch Kit with Audio |

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA
 Tel: 1-310-961-5500
 Fax: 1-310-961-5511
 Web: www.trendnet.com
 Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

