

TK-801R

8-Port Rack Mount KVM Switch

TRENDnet's TK-801R 8-Port KVM Switch allows you to manage 8 PC's with just one keyboard, monitor, and mouse. Switch between PC's with a simple press of a button! Eliminate the hassle of cable swapping and save money and space with TRENDnet's TK-801R. With its rack-mount size and slim one unit height, it is perfect for mounting on EIA-19" rack in the Equipment Room and Computer Lab. Rich in features such as, Hot-Plug, Auto-Scan, and Hot-Key Operation, TRENDnet's TK-801R is the perfect choice for managing multiple PC's.





FEATURES

- Support Microsoft Intellimouse, Microsoft Intellimouse Explorer, Logitech NetMouse, Optical Mouse, or other fully compatible MS Mouse.
- --- PS/2 Keyboard/Mouse emulation
- --- Support DOS, Windows 3.x/95/98/ME/NT/2000/XP, Netware, Unix, Linux, and more
- Very high video quality up to 1920 x 1440 resolution and 200Mhz bandwidth
- No software required easy PC selection via Push Buttons and Hot-Key Operation
- *** Hot-Plug feature add or remove PC's without powering off the KVM switch or other PC's
- *** Keyboard status restored when switching PCs
- --- LED Display for easy status monitoring
- --- Beeping sound for port switching confirmation
- *** EIA-19" rack-mountable (hardware included)
- *** 1-Year Warranty

BENEFITS

--- Integration Friendly:

Does not require driver/software for the installation and operation. Switching between PC's with the Push Buttons and Hot-Key operation.

---> Flexible:

Hot-Plug feature – add PC's or remove connected PC's without powering off the KVM Switch or the other PC's.

-- Cost Effective:

Manage multiple PC's with single keyboard, monitor, and mouse. Save on equipment cost, utility, and space.

*** Performance:

Support very High Video Quality up to 1920 x 1440 with 200Mhz bandwidth. Keyboard status is saved for each PC.

SPECIFICATIONS

Computer Port:

- 8 ports.
- Keyboard and Mouse: PS/2 type mini Din 6-pin
- VGA: HDDB 15-pin

Console Port:

 1 port. Keyboard and Mouse: PS/2 type mini Din 6-pin, VGA HDDB 15-pin

PC Selection:

· Hot-Keys and Push Buttons

LED Segment:

 Two LED indicators per port (PC Link green and PC Active red)

Auto-Scan Intervals:

• 5~99 seconds

Keyboard State:

· Saved and restored

Video Bandwidth:

• 200MHz

Power Adapter:

• External AC Power adapter, 12VDC, 1A (or 9VDC, 1A)

Dimensions:

• 410 x 165 x 45 mm (16.14 x 6.5 x 1.77 inches)

Weight:

Approximately 2.2 Kg. (4.85 lbs)

Temperature:

- Operating: 0°~40° C (32°~104° F)
- Storage: -20°~60° C (-4~140° F)

Operating Humidity:

• 0~80%, Non-Condensing

Certifications:


• FCC. CE







NETWORKING SOLUTIONS

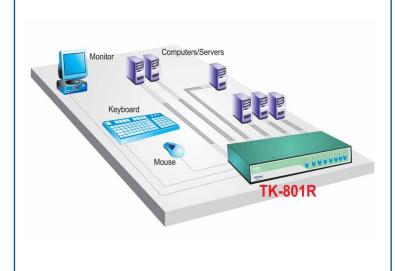

To Order Please Call: 1-888-326-6061

RELATED PRODUCT

---> TK-801R: 8-Port Rack Mount KVM Switch

*** TK-200: 2-Port KVM Switch Kit

*** TK-400: 4-Port KVM Switch

*** TK-800R: 8-Port Rack Mount KVM Switch

*** TK-C06: 6 feet KVM Cable

--- TK-C10: 10 feet KVM Cable

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street Torrance, CA. 90505. USA Tel: 310-891-1100 Fax: 310-891-1111

Web: www.TRENDNET.com Email: sales@trendware.com

