



TK-V200S 2-Port Video Splitter

TRENDnet's TK-V200 2-port Video Splitter broadcasts your computer's video signal to 2 VGA monitors up to 2048 x 1536 resolutions, providing an efficient solution for conducting presentations, remote monitoring, and multimedia applications.



FEATURES

- Broadcasts real-time video to multiple display locations
 - Supports ultra high 350 MHz video (-3dB) bandwidth
- Superior VGA quality – up to 2048 x 1536 at 60Hz
- Extends video signal up to 65 Meters (210 feet) without degradation
- Alert high or low level brightness control
- Supports VGA, SVGA, XGA, and Multi-Synchronization monitors
- Daisy chainable for easily expand video splitter
- Utilizes standard monitor extension cables
- Provides locking connectors for cables
- Hassle free – No software required
- Metal casing
- 2-Year warranty



TK-V200S

2-Port Video Splitter

SPECIFICATIONS

Port Interface:

- 1 x HDDB 15 pin Male
- 2 x HDDB 15 pin Female

Signal Types:

- VGA, SVGA, XGA, Multi Synchronization

Supported OS:

- Windows 98/98SE/ME/2000/XP, Mac 9.0 or higher

Resolution:

- 2048 x 1536 @ 60MHz

LEDs:

- Power

Housing:

- Metal

Power:

- 9VDC 600mA

Power Consumption:

- 0.85W (Max)

Dimensions (L x W x H) :

- 121 x 72 x 43 mm
(4.76 x 2.83 x 1.69 in)

Weight:

- 382 g (13.5 Oz)

Temperature:

- Operating: 0 ° C ~ 40 ° C
(32 ° F ~ 104 ° F)
- Storage: -5 ° C ~ 70 ° C
(23 ° F ~ 158 ° F)

Humidity:


- 0 ~ 80% (Non-condensing)

Certifications:


- FCC, CE



NETWORKING SOLUTIONS

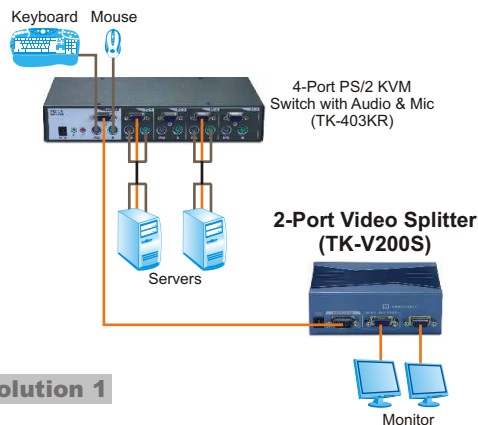

Solution 1

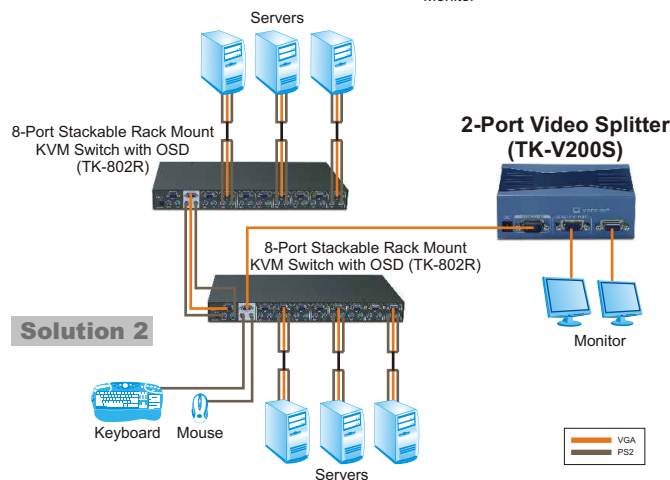

Solution 2

RELATED PRODUCT

- TK-401R: 4-Port Rack Mount KVM Switch
- TK-801R: 8-Port Rack Mount KVM Switch
- TK-802R: 8-Port Stackable Rack Mount KVM Switch with OSD
- TK-1602R: 16-Port Stackable Rack Mount KVM Switch with OSD

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

To Order Please Call:
1-888-326-6061

