




Guide d'installation rapide 

TK-V201S
TK-V401S
1.01

Table of Contents

Français	1
1. Avant de commencer	1
2. Procéder à l'installation	2
<hr/>	
Technical Specifications	8
Troubleshooting	9




Contenu de l'emballage

- TK-V201S/TK-V401S
- Guide d'installation rapide en plusieurs langues
- Adaptateur secteur (9V DC, 0.5A)
- 1 câble VGA mâle vers femelle (1.2m/6ft)

Configuration du système


- 2 x Moniteur compatible VGA (TK-V201S) / 4 x Moniteur compatible VGA (TK-V401S)
- Windows 7(32/64-bit)/Vista(32/64-bit)/XP(32/64-bit)/2000/2003 Server/Me/98SE
- Switch KVM (optionnel)

Branchement d'un seul ordinateur

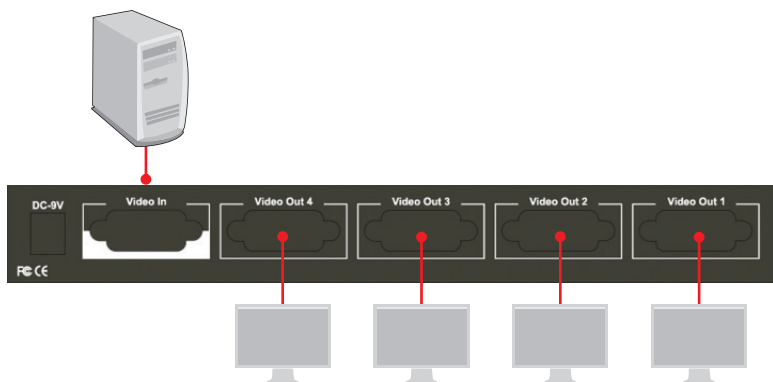

1. ETEIGNEZ correctement votre ordinateur et vos moniteurs.

2. Utilisez le câble VGA fourni pour connecter votre ordinateur au port VIDEO IN du splitter vidéo (TK-V401S illustré).

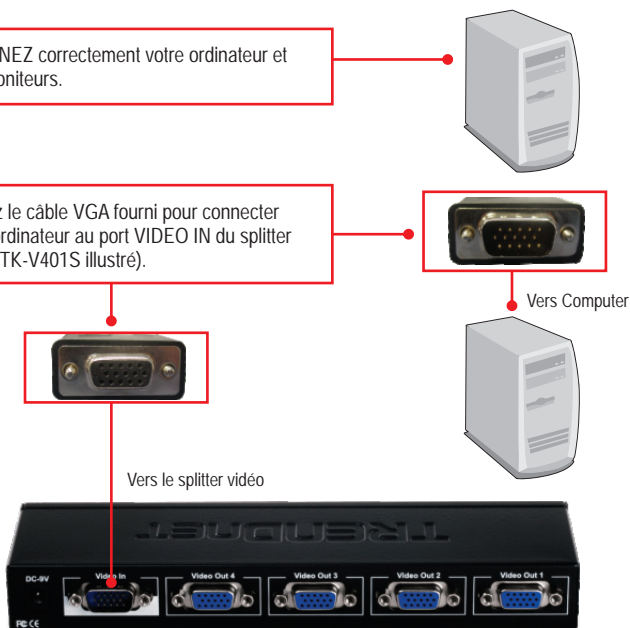

3. Branchez le(s) moniteur(s) à n'importe quels ports VIDEO OUT (sortie vidéo) du séparateur vidéo.




4. Branchez l'adaptateur secteur fourni au splitter vidéo et ensuite à une prise de courant.

5. ALLUMEZ votre ordinateur et tous les moniteurs connectés

6. Vérifiez que le voyant Power est allumé.



Connexion au switch KVM

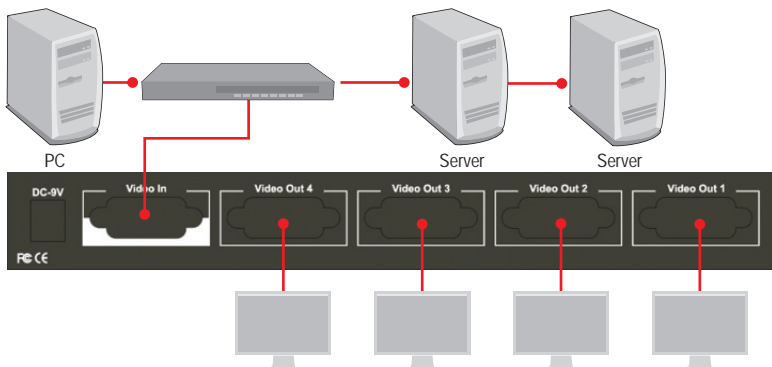

1. Branchez l'un des câbles VGA fournis au port VIDEO IN port du splitter vidéo (TK-V401S illustré).



2. Branchez l'autre extrémité du câble VGA fourni au port Console du switch KVM.



Switch KVM

3. Branchez votre moniteur à un port VIDEO OUT du splitter vidéo.



4. Branchez l'adaptateur secteur fourni au splitter vidéo et ensuite à une prise de courant.

5. Consultez le guide d'installation rapide de votre switch KVM afin de brancher votre ordinateur au switch KVM.

6. ALLUMEZ votre ordinateur et tous les moniteurs connectés


7. Vérifiez que le voyant Power est allumé.




Montage en série

Remarque :

1. Vous pouvez uniquement raccorder en série le séparateur vidéo avec un autre TK-V201S ou TK-V401S.
2. Vous pouvez aussi connecter en série 4 séparateurs.

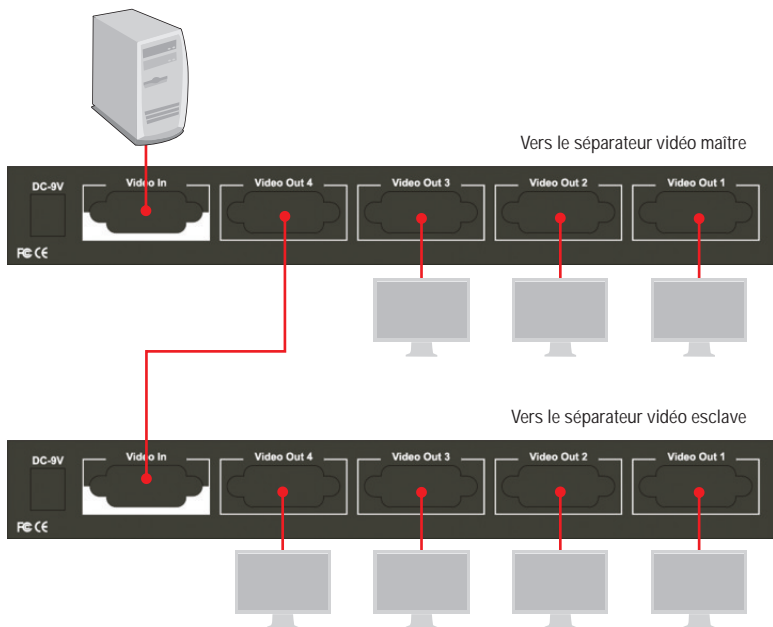

1. Utilisez le câble VGA fourni pour connecter votre ordinateur ou switch KVM au port VIDEO IN du premier séparateur vidéo (maître) (modèle illustré : TK-V401S).

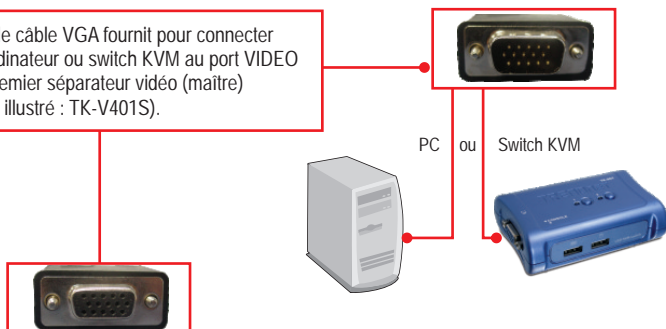

Vers le séparateur vidéo maître



2. Connectez une extrémité du deuxième câble VGA à l'un des ports VIDEO OUT du premier séparateur vidéo (maître).




3. Connectez l'extrémité opposée du deuxième câble VGA au port VIDEO IN du deuxième séparateur vidéo (esclave).



4. Si vous avez un troisième séparateur vidéo, connectez une extrémité du câble VGA au port VIDEO OUT du deuxième séparateur vidéo. Connectez ensuite l'autre extrémité du câble VGA au port VIDEO IN du troisième séparateur vidéo (esclave). Répétez l'opération pour chaque séparateur vidéo supplémentaire.

5. Branchez le(s) moniteur(s) à n'importe quel port VIDEO OUT (sortie vidéo) du séparateur vidéo.

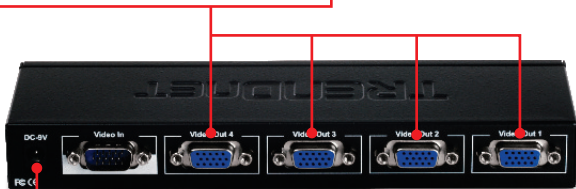

6. Branchez l'adaptateur secteur fourni à chaque séparateur vidéo et ensuite à une prise de courant.

7. Vérifiez que le voyant Power est allumé.



L'installation est maintenant complète.

Enregistrez votre produit

Afin d'être sûr de recevoir le meilleur niveau de service clientèle et le meilleur support possible, veuillez prendre le temps d'enregistrer votre produit en ligne sur:

www.trendnet.com/register

Nous vous remercions d'avoir choisi Trendnet

Hardware		
Video Input		1 x USB keyboard Type A
Video Output	TK-V201S	2 x 15-pin VGA HDB Female
	TK-V401S	4 x 15-pin VGA HDB Female
Resolution		1920 x 1440 Max.
Signal Distance		WUXGA, HD, UXGA, SXGA+, SXGA, WSXGA, WXGA, XGA, SVGA, VGA, QVGA, and Multisync supported
Cable Distance		65 m (210 ft.) max.
Daisy-Chain (Cascade)		Up to 3 levels
Cables (included)		1 x 15-pin VGA cable (male to female), 1.2 m (4 ft.)
Power		9V DC, 0.5A
LEDs		Power
Dimension (L x W x H)	TK-V201S	131 x 65 x 26mm (6.3 x 2.5 x 1in.)
	TK-V401S	205 x 65 x 26 mm (8 x 2.5 x 1 in.)
Weight	TK-V201S	200g (7.05oz)
	TK-V401S	400g (14.1oz)
Temperature		Operation: 0°C~40°C (32°F~104°F) Storage: -20°C~60°C (-4°F~140°F)
Humidity		0~90% non-condensing
Certifications		CE, FCC

1. My monitors and my PC are on, but I still do not see anything on my monitors.
 1. Verify everything is properly connected. See section 2.
 2. Verify the power adapter is connected to the video splitter.
 3. Verify the Power LED is on.
 4. Try plugging the monitor into another Video OUT port.
 5. Your monitor could be defective. Try plugging another monitor into the video splitter
2. Does the video splitter support DVI adapters?

The video splitter does not support DVI-to-VGA adapters.
3. How many video splitters can I daisy-chain together?

You can daisy chain up to 4 video splitters together
4. Does the video splitter support extended desktop?

The video splitter does not support extended desktop. The video splitter supports cloning only.

If you still encounter problems or have any questions regarding the TK-V201S/TK-V401S, please contact TRENDnet's Technical Support Department.

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

TK-V201S/TK-V401S - 2 Years Limited Warranty

AC/DC Power Adapter, Cooling Fan and Power Supply carry a 1 year limited warranty

If a product does not operate as warranted during the applicable warranty period, TRENDnet shall reserve the right, at its expense, to repair or replace the defective product or part and deliver an equivalent product or part to the customer. The repair/replacement unit's warranty continues from the original date of purchase. All products that are replaced become the property of TRENDnet. Replacement products may be new or reconditioned. TRENDnet does not issue refunds or credit. Please contact the point-of-purchase for their return policies.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet within the applicable warranty period and providing a copy of the dated proof of the purchase. Upon proper submission of required documentation a Return Material Authorization (RMA) number will be issued. An RMA number is required in order to initiate warranty service support for all TRENDnet products. Products that are sent to TRENDnet for RMA service must have the RMA number marked on the outside of return packages and sent to TRENDnet prepaid, insured and packaged appropriately for safe shipment. Customers shipping from outside of the USA and Canada are responsible for return shipping fees. Customers shipping from outside of the USA are responsible for custom charges, including but not limited to, duty, tax, and other fees.

WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACE. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATE, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

Some TRENDnet products include software code written by third party developers. These codes are subject to the GNU General Public License ("GPL") or GNU Lesser General Public License ("LGPL").

Go to <http://www.trendnet.com/gpl> or <http://www.trendnet.com> Download section and look for the desired TRENDnet product to access to the GPL Code or LGPL Code. These codes are distributed WITHOUT WARRANTY and are subject to the copyrights of the developers. TRENDnet does not provide technical support for these codes. Please go to <http://www.gnu.org/licenses/gpl.txt> or <http://www.gnu.org/licenses/lgpl.txt> for specific terms of each license.

PWP05202009v2

Certifications

This equipment has been tested and found to comply with FCC and CE Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received. Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with you Local Authority or Retailer for recycling advice.



NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

ADVERTENCIA

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.



Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at <http://www.trendnet.com/register>