



TPL-423E (V1.0R)

SETUP INFO

UPC #	710931150506
Master Carton UPC #	10710931150503
Product Page	http://www.trendnet.com/products/proddetail.asp?prod=115_TPL-423E
Additional Images	http://www.trendnet.com/support/supportdetail.asp?prod=115_TPL-423E
Alternate Product Name	Powerline 1300 AV2 Adapter with Built-in Outlet, Gigabit Port, IEEE 1905.1 & IEEE 1901
Key Search Words	Powerline 1300 Adapter, Built-in Outlet, Bonus Outlet, PLC, PLC Adapter, Gigabit port, Homeplug AV2, IEEE 1905.1, IEEE 1901, Homeplug AV, Powerline AV Adapter, TPL-422E2K Kit, Powerline 1200, Powerline 600 , Powerline 500 , Powerline 200 , Powerline, TPL-423E2K
Unit Dimensions	19.3 x 16.6 x 8.6cm (8 x 7 x 4 in.)
Unit Weight	0.72kg (1.71 lbs.)
Unit Qty per Case	20
Case Dimension	45 x 35 x 41cm (18 x 14 x 17 in.)
Case Weight	13.13kg (31 lbs.)
Harmonized Tarriff Code	8517620050
ECCN	5A992
Country of Origin	China
Product Availability Date	March 2018
Warranty	3 year
MSRP	\$49.99




Powerline 1300 AV2 Adapter with Built-in Outlet

TPL-423E (v1.0R)

- Powerline 1300 networking over existing electrical lines
- Built-in electrical outlet
- Powerline noise filter minimizes interference from powered devices
- Enhanced Powerline performance and coverage from MIMO with Beamforming technology
- Encrypted TRENDnet adapters auto-connect out of the box
- Gigabit port for high-speed connectivity
- Powerline range up to 300m (984 ft.)
- Two Powerline adapters are required to start a network
- Cross compatible with Powerline 1200, 600, 500, and 200 adapters

TRENDnet's Powerline 1300 AV2 Adapter with Built-in Outlet, model TPL-423E, creates a high-speed Powerline 1300 network using your home's existing electrical system. Two adapters are needed to start a network. TRENDnet adapters are protected with 128-bit AES encryption. Plug in the first adapter and network it to your existing router. Plug in other adapters on the same electrical system and they will auto-connect to the first adapter for instant internet access. Avoid losing a power outlet by using the built-in electrical outlet to power other devices.

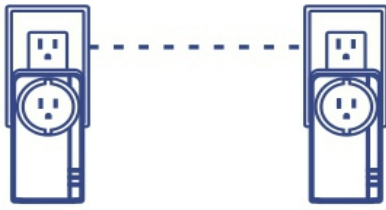


Built-in Outlet

Avoid losing a power outlet by using the built-in electrical outlet to power other devices.



High-Speed Powerline 1300


Powerline 1300 technology and a gigabit port deliver fast and stable networking to seamlessly connect devices and stream 4K video.

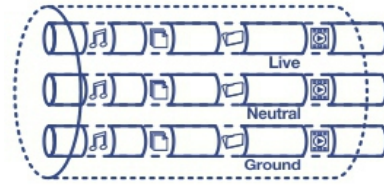

MIMO Technology

Multiple Input Multiple Output (MIMO) with Beamforming technology uses live, neutral, and ground wires to increase performance between adapters.

Networking Solution

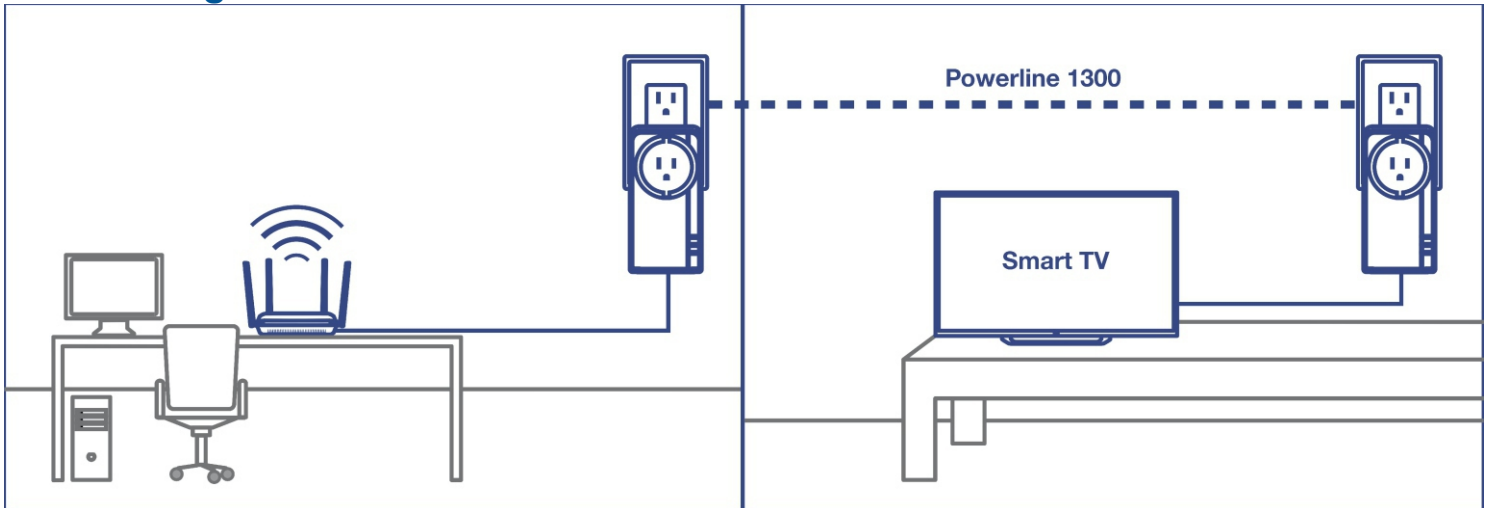

Sync Button

Press the Sync button to change existing Powerline encryption keys



Cross Compatibility

Cross compatible with Powerline 1200, 600, 500, and 200 adapters



Easy Installation

TRENDnet adapters auto-connect out of the box



Powerline 1300

Powerline 1300 technology delivers fast and stable networking to seamlessly connect devices and stream 4K video.



128-bit AES Encryption

Powerline communication is protected with 128-bit AES encryption



MIMO with Beamforming Technology

Multiple Input Multiple Output (MIMO) with Beamforming technology uses live, neutral, and ground wires to increase performance between adapters.



Gigabit Port

Gigabit port for computers, smart TVs, or other network enabled devices



Expandable

Use up to 8 adapters on a single Powerline network

Specifications

Standards	<ul style="list-style-type: none"> • IEEE 802.3 • IEEE 802.3u • IEEE 802.3x • IEEE 802.3ab • IEEE 1901
Device Interface	<ul style="list-style-type: none"> • 1 x Gigabit LAN port • Sync button • Reset button • LED indicators • Built-in electrical power socket with noise filter North America Type B (NEMA 5–15) (10A max. @ 120V AC)
Power plug	• North America Type B (NEMA 5–15)
Frequency Band	• 2 – 67.5MHz
Modulation/ Protocol	<ul style="list-style-type: none"> • OFDM, 4096/1024/256/64/16/8-QAM, QPSK, BPSK, ROBO, HS-ROBO, Mini-ROBO • CSMA/CA
Data PHY Rate	• Up to 1300Mbps
Networking Distance	• Powerline: Up to 300m (980ft.) linear distance over electrical power lines***
Encryption	• 128-Bit AES (Advanced Encryption Standard)
Powerline Nodes	• Up to 8 (max.)
Overlapping Powerline Networks	• Up to 4 (per electrical system)

Special Features	<ul style="list-style-type: none"> • Built-in power socket • Auto-connects to other TRENDnet Powerline adapters • IPv6 support • IGMP / MLDv2 Streams
Optional Utility: OS Compatibility	• Windows® 10, 8.1, 8, 7, Vista, XP
Power	<ul style="list-style-type: none"> • Input: 100 - 240V AC, 50-60Hz • Consumption: Active mode: 4W (max.); Standby mode: 0.5W (max.)
Operating Temperature	• 0 – 50°C (32 – 122°F)
Operating Humidity	• Max. 90 % non-condensing
Certifications	<ul style="list-style-type: none"> • FCC • IC • ETL
Dimensions	• 120 x 60 x 65mm (4.73 x 2.4 x 2.6 in.)
Weight	• 176g (6.2 oz.)
Warranty	• 3 year

PACKAGE CONTENTS

- TPL-423E
- Quick Installation Guide
- CD-ROM (Utility & User's Guide)
- Network cable (1.5 m/5 ft.)

* Maximum of 8 adapters (nodes) recommended for streaming video across your network.

** 1.3 Gbps is the maximum theoretical Powerline data rate when connected to another Powerline 1300 device. Data throughput may vary by circuit wire conditions. If an electrical system does not have a grounded connection, the theoretical networking speed is reduced to 650 Mbps.

*** Powerline communication works on a single electrical system. (Usually controlled by a single distribution panel). Power strip, GFCI outlets, and AFCI circuit breakers may degrade Powerline network signals.