

4-Port Compact USB Hub TU-400E

TRENDnet's TU-400E is a highly integrated 4-port USB hub. It consists of one upstream and four downstream ports and was designed to bridge USB interfaced peripherals to your desktop or notebook computer. The TU-400E complies with USB 1.0/1.1 specifications and supports both full (12Mbps) and low (1.5Mbps) data rate speeds. With Plug-and-Play and Hot-Swap, you can easily connect/disconnect USB equipped camera, network adapter, modem, and joystick to your computer. Connect each port to another USB hub for limited expansion. Compact, light-weighted, and requiring no external power, the TU-400E is ideal for SOHO and mobile computing.

FEATURES

- Compliant with USB 1.1 Specifications
- Supports all USB speeds: Low-Speed (1.5Mbps), Full-Speed (12Mbps)
- Switches to the peripheral's Highest Supported Speed Automatically
- Supports up to 127 USB Devices
- Supports Suspend and Resume Operations
- Compatible with Windows 98SE/ME/2000/XP, Linux and Mac Operating Systems
- One USB A-B cable included (60cm /2ft.)
- Supports Plug & Play and Easy Installation
- 2-Year Warranty

BENEFITS

Compatibility:

4-port USB Hub is compatible with Windows 98/ME/2000/XP, Linux, and Macintosh, so it is ready to work as soon as the user plugs it into PC

Flexibility:

TU-400E provides convenient ways to connect USB devices to Desktop or Laptop

Expandability:

Daisy-chain to additional USB Hubs to allow the use of up to 127 USB devices at the same time

Speed:

Supports 12Mbps high-speed and 1.5Mbps low-speed operations mode


4-Port Compact USB Hub

TU-400E

SPECIFICATIONS

Hardware	
Standards	<ul style="list-style-type: none">• USB 1.1
Ports	<ul style="list-style-type: none">• 1 x Upstream Port (Type B)• 4 x Downstream Ports (Type A)
OS Compliant	<ul style="list-style-type: none">• Windows 98SE/ME/2000/XP, Linux & Mac OS
Data Rate	<ul style="list-style-type: none">• Full-Speed: 12Mbps• Low-Speed: 1.5Mbps
Power Consumption	<ul style="list-style-type: none">• 500mA (max) per port
LED	<ul style="list-style-type: none">• Power
Max Devices Supported	<ul style="list-style-type: none">• 127 (daisy-chaining with other USB hubs)
Dimension (W x H x D)	<ul style="list-style-type: none">• 80 x 35 x 10 mm (3.14 x 1.4 x 0.4 inches)
Weights	<ul style="list-style-type: none">• 10g (0.35oz.)
Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 45° C (32° ~ 113° F) • Storage: -20° to 70° C (-4° ~ 158° F)
Humidity	<ul style="list-style-type: none">• 0% to 90% (Non-Condensing)
Certifications	<ul style="list-style-type: none">• FCC, CE

NETWORKING SOLUTIONS

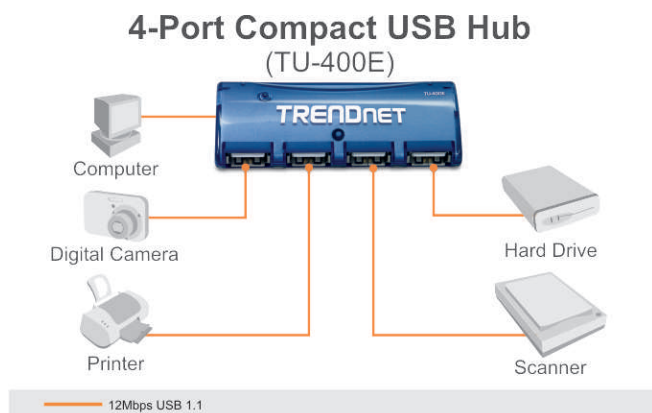

PACKAGE CONTENTS

- TU-400E
- Quick Installation Guide
- USB A-B Cable

RELATED PRODUCTS

TEW-P1U	Wireless Print Server with 1 USB Printer Port
TU-ET100C	10/100Mbps USB to Ethernet Adapter

ORDERING INFORMATION

TRENDnet

3135 Kashiwa Street, Torrance, CA 90505 USA
Tel: 1-310-891-1100
Fax: 1-310-891-1111
Web: www.trendnet.com
Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

