



TU-400E **4-Port Compact USB Hub**

TRENDnet's TU-400E is a highly integrated 4-port USB hub. It consists of one upstream and four downstream ports and was designed to bridge USB interfaced peripherals to your desktop or notebook computer. The TU-400E complies with USB 1.0/1.1 specifications and supports both full (12Mbps) and low (1.5Mbps) data rate speeds. With Plug-and-Play and Hot-Swap, you can easily connect/disconnect USB equipped camera, network adapter, modem, and joystick to your computer. Connect each port to another USB hub for limited expansion. Compact, light-weighted, and requiring no external power, the TU-400E is ideal for SOHO and mobile computing.



FEATURES

- Compliant with USB 1.1 Specifications
- Supports all USB speeds: Low-Speed (1.5Mbps), Full-Speed (12Mbps)
- Switches to the peripheral's Highest Supported Speed Automatically
- Supports up to 127 USB Devices
- Supports Suspend and Resume Operations
- Compatible with Windows
- 98SE/ME/2000/XP, Linux and Mac Operating Systems
- One USB A-B cable included (60cm /2ft.)
- Supports Plug & Play and Easy Installation
- 2-Year Warranty

BENEFITS

- **Compatibility:**
4-port USB Hub is compatible with Windows 98/ME/2000/XP, Linux, and Macintosh, so it is ready to work as soon as the user plugs it into PC
- **Flexibility:**
TU-400E provides convenient ways to connect USB devices to Desktop or Laptop
- **Expandability:**
Daisy-chain to additional USB Hubs to allow the use of up to 127 USB devices at the same time
- **Speed:**
Supports 12Mbps high-speed and 1.5Mbps low-speed operations mode



TU-400E

4-Port Compact USB Hub

SPECIFICATIONS

Standard:

- USB 1.1

Ports:

- 1 x Upstream Port (Type B)
- 4 x Downstream Ports (Type A)

OS Compliant:

- Windows 98SE/ME/2000/XP, Linux and Mac

Data Rate:

- Full-Speed: 12Mbps
- Low-Speed: 1.5Mbps

Power Consumption:

- 500mA (max) per port

Power Adapter:

- 5V DC, 2A External Power Adapter

LED:

- Power

Max. Devices Supported:

- 127 (daisy-chaining with other USB hubs)

Dimension:

- 80 x 35 x 10 mm (3.14 x 1.4 x 0.4 inches)

Weight:

- 10g (0.35oz.)

Temperature:

- Operating: 0° ~ 45° C (32° ~ 113° F)
- Storage: -20° to 70° C (-4° ~ 158° F)

Operating Humidity:


- 0% to 90% (Non-Condensing)

Certifications:

- FCC, CE



NETWORKING SOLUTIONS

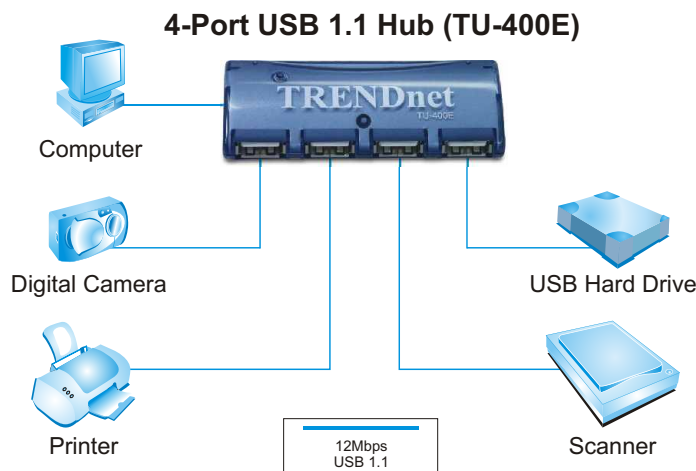

To Order Please Call:
1-888-326-6061

RELATED PRODUCTS

→ TU-ET100C

USB to 10/100Mbps Fast Ethernet Adapter

→ TEW-P1U

Wireless Print Server with 1 USB Printer Port

→ TFM-560U

TRENDnet's 56K (V.90) High Speed USB Fax Modem

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

TRENDnet
TRENDware, USA