




## 10 Ft. USB to Serial Converter

TU-S910 (v3.2R)

- Connect a RS-232 serial device, such as a switch, a modem, to a USB port on your computer
- 10 ft. / 3m cable for easy installation
- Supports USB 1.1, and compatible with USB 2.0 and USB 3.0 ports
- Supports Windows® and Mac® operating systems

TRENDnet's 10 Ft. USB to Serial Converter Cable, model TU-S910, allows users to conveniently connect an RS-232 serial device, such as a switch, modem or printer, to a USB port on your desktop PC or laptop. The 10 ft. USB to serial adapter supports both Windows® and Mac® operating systems. Integrated cables provide setup flexibility and accommodates most installation scenarios.

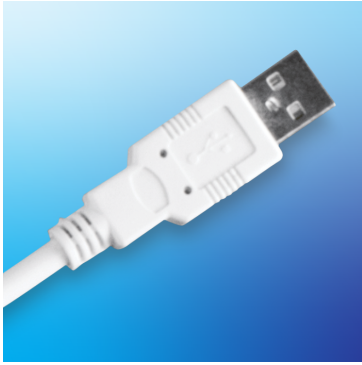

### USB

The USB to serial adapter is compatible with USB 1.1, 2.0 and 3.0 devices.



### RS-232 Serial Connector

Connect a RS-232 serial devices, such as switches, modems or printers, to standard USB ports on laptops and desktops.




10 Feet

### 10 Ft. Flexible Cable

Integrated and flexible 3m (10 ft.) USB cable accommodates most installation scenarios.

## NETWORKING SOLUTION

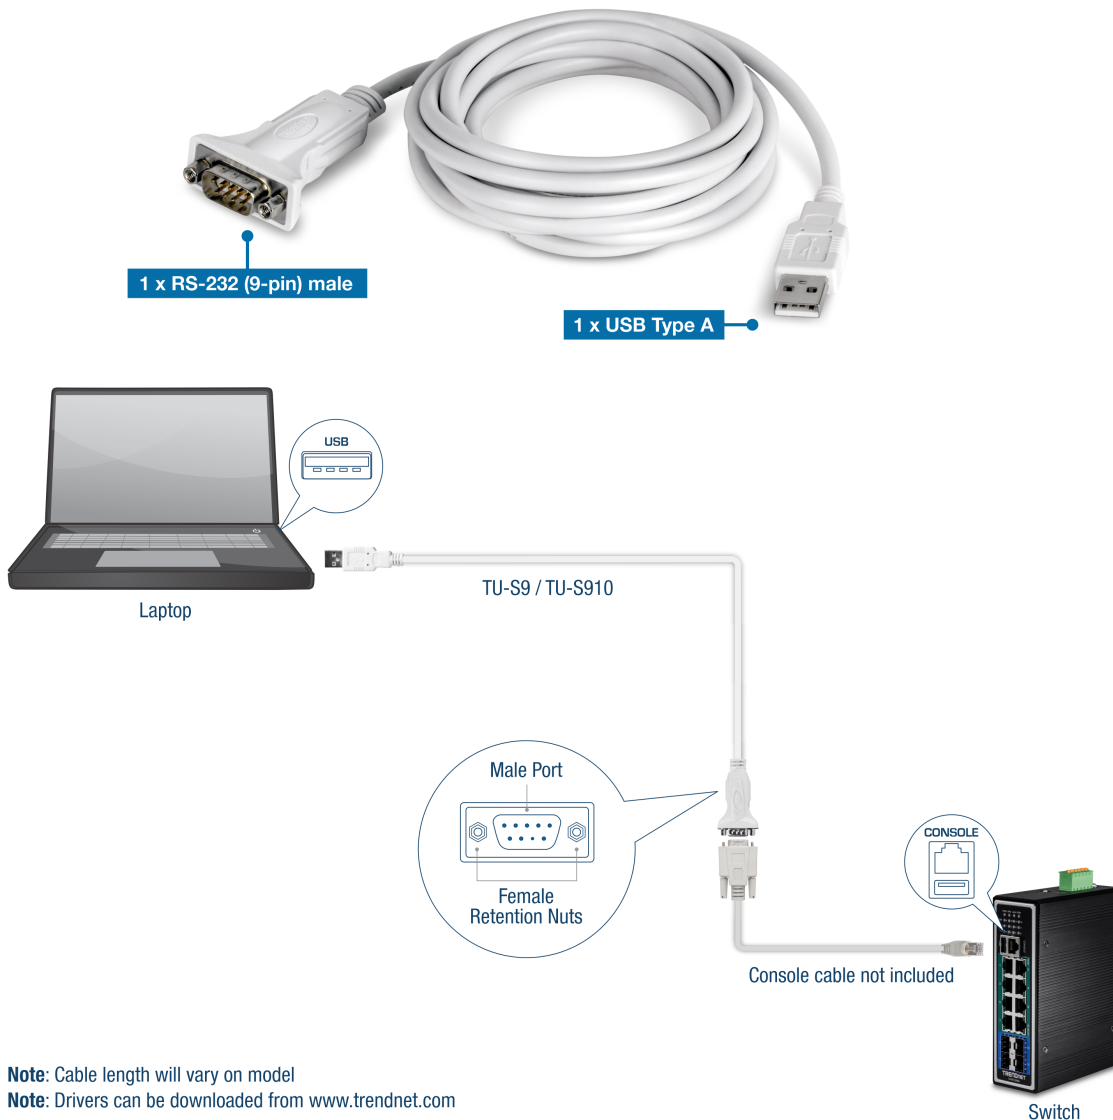

**Note:** Cable length will vary on model  
**Note:** Drivers can be downloaded from [www.trendnet.com](http://www.trendnet.com)

## FEATURES



### Easy Setup

Simple installation in seconds



### Long & Flexible Cable

Integrated and flexible 3m (10 ft.) USB cable accommodates most installation scenarios



### RS-232

Connect a RS-232 serial devices, such as switches, modems or printers, to standard USB ports on laptops and desktops.



### USB

The USB to serial adapter is compatible with USB 1.1, 2.0 and 3.0 devices.



### Operating Systems

The USB to serial adapter is compatible with Windows<sup>®</sup> and Mac<sup>®</sup> operating systems

## SPECIFICATIONS

### Standards

- USB 1.1

### Interface

- 1 x USB Type A
- 1 x RS-232 (9-pin) male
- Cable length: 3m (10 ft.)

### Data Rate

- Up to 6Mbps

### Supported OS

- Windows<sup>®</sup> 11, 10, 8.1, 8, 7
- Mac OS<sup>®</sup> 10.11, 10.10, 10.9, 10.8, 10.7, 10.6

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 85% non-condensing

### Power

- USB powered

### Power Consumption

- 500mA (max.)

### Dimensions

- RS-232 connector: 65 x 35 x 10mm (2.55 x 1.4 x 0.4 in.)
- Cable length: 3m (10 ft.)

### Weight

- 250g (8.82 oz.)

### Certifications

- CE
- FCC

### Warranty

- 2 year

### Package Contents

- TU-S910
- Quick Installation Guide
- CD-ROM (Drivers)