



USB Monitor Extender TU2-DVIV (V2.0R)

The USB monitor extender uses a USB port on your computer to connect to a high definition DVI or VGA monitor. Connect your desktop or laptop to a DVI monitor and experience the visual impact of 32-bit True Color Depth technology and a sparkling megapixel high definition image. Install the driver and plug the USB 2.0 cable into your Microsoft Windows desktop or laptop computer. The adapter can plug into a LCD or CRT monitor that has a free VGA or DVI port. Standard or wide screen viewing modes are supported. Clone your monitor image onto 7 monitors or display a single viewing field over multiple screens.

FEATURES

- Compliant with CRT and Flat Panel (LCD) monitors
- High definition of up to 1920 x 1080 megapixel resolution for standard or wide screen ratios
- Use up to 7 monitors to clone or divide a single viewing screen
- 32-bit True Color Depth technology
- Supports DirectX 9, DirectX 10
- Fully USB 2.0 Bus-Powered
- Supports Windows and Mac operating systems
- 2-year limited warranty

USB Monitor Extender

TU2-DVIV (v2.0R)


NETWORK
ACCESSORIES

SPECIFICATIONS

HARDWARE

Standard	<ul style="list-style-type: none">• USB 2.0; DVI-I
Interface	<ul style="list-style-type: none">• USB 2.0• DVI HDDE 30pin Female
Power mode	<ul style="list-style-type: none">• Bus-power
Expansions	<ul style="list-style-type: none">• Up to 6 adapters (7 monitors)
Supported OS	<ul style="list-style-type: none">• Windows 7 (32/64-bit), Vista (32/64-bit), XP (32/64-bit)• Mac OS X (10.4~10.7)
Resolution	<ul style="list-style-type: none">• Up to 1920 x 1080
System Requirements	<ul style="list-style-type: none">• Intel Core 2 Duo or equivalent power CPU• 1.2Ghz or higher processor clock speed• 512MB RAM for single monitor• 1GB RAM or more for multiple monitors• 1 x USB 2.0 port and 30MB free disk space
Dimension	<ul style="list-style-type: none">• 88 x 55 x 17 mm (3.5 x 2.2 x 0.7 in.)
Weight	<ul style="list-style-type: none">• 60 g (2.1 oz)
Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 40°C (32° ~ 104°F)• Storage: -20° ~ 70°C (14° ~ 158°F)
Humidity	<ul style="list-style-type: none">• Max 90% (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC

NETWORKING SOLUTIONS

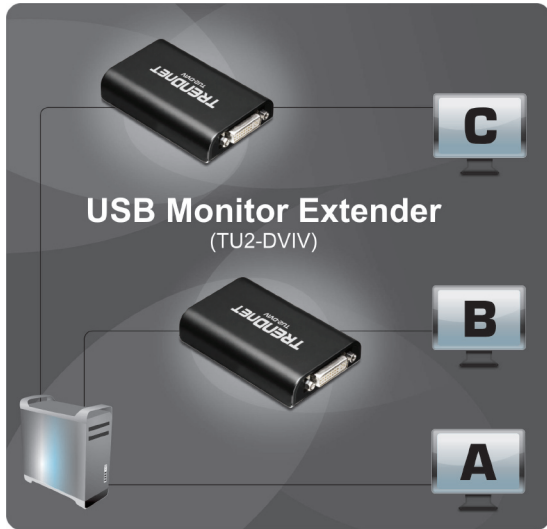

PACKAGE CONTENTS

TU2-DVIV

Quick Installation Guide

CD-ROM (Utility & Drivers)

1 x VGA to DVI convertor

1 x USB cable (45 cm / 18 in)

RELATED PRODUCTS

TU2-700	7-Port High Speed USB Hub w/ Power Adapter
TU2-H5PI	5-Port USB PCI Adapter

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

