




## **TU2-ET100** *Hi-Speed USB to Fast Ethernet Adapter*

The TU2-ET100 is a high speed USB network adapter. It allows you to instantly connect to a 10/100Mbps network from a USB enabled desktop or Notebook PC. Compliant with the USB 2.0 standard and backwards compatible with the USB 1.0 and 1.1, the TU2-ET100 features 480Mbps throughput that fully supports 100Mbps connection. You can instantly add network capability for sharing files and printers between PCs for your home or office. Use the TU2-ET100 to gain access to broadband Internet and explore valuable resources on the web.

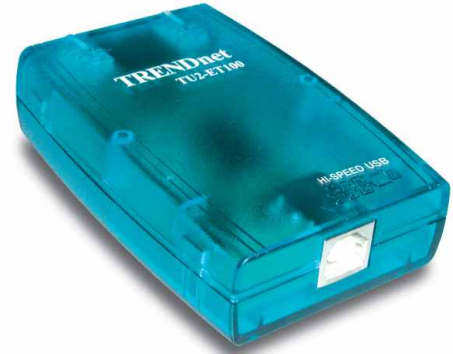

### Features

- ...> Compliant with USB specification 1.0, 1.1, and 2.0
- ...> Auto-sense 10/100Mbps connection speed
- ...> Features full-duplex mode that doubles the network connection speed
- ...> Bus Powered – no external power is required
- ...> Easy to read LED indicators
- ...> Compact and robust design – perfect solution for all network users both desktop and mobile
- ...> Compatible with Windows 98/ME/2000/XP
- ...> Supports Plug and Play
- ...> Easy installation
- ...> USB 2.0 A-B Cable included
- ...> 5-years warranty

### Benefits

- ...> **Benefits Compatibility:**  
TU2-ET100 is compatible with Windows 98/ME/2000/XP.
- ...> **Flexibility:**  
The “Hot Swap” feature creates flexible connection and disconnection at any time.
- ...> **Installation:**  
Provides easy installation with Plug and Play feature.
- ...> **Speed:**  
Provides 480Mbps high-speed, 12Mbps full-speed, or 1.5Mbps low-speed operation mode.



# TU2-ET100

## Hi-Speed USB to Fast Ethernet Adapter

### Specifications

#### Standard:

- IEEE 802.3 10Base-T and 802.3u 100Base-TX, USB Specification 1.0, 1.1, and 2.0

#### Cabling:

- Cat. 5 UTP/STP cable up to 100 meters (328 feet)

#### Data Speed:

- 10/100Mbps for Ethernet/Fast Ethernet data transfer

#### Power Consumption:

- Operating Mode: +5V DC, 330mA Max.
- Suspend Mode: +5V DC, 25mA

#### LEDs:

- Link (10/100Mbps), TX/RX (Activity)

#### Driver Support:

- Windows 98/ME/2000/XP

#### Host Interface:

- High-Power Bus-Powered from USB Host or USB Hub (does not require power supply)
- High-Speed USB, upstream USB Type B Connector
- Supports Suspend Power Saving mode

#### Dimensions:

- 80 x 53 x 22 mm (3.2 x 2.1 x 0.9 inches)

#### Weight:

- 68 g (2.4 oz.)

#### Operating Temperature:

- 0° ~ 65° C (32° ~ 149° F)

#### Operating Humidity:


- 10 % ~ 90 % non-condensing

#### Certifications:

- FCC, CE, VCCI



### Solution de Réseaux

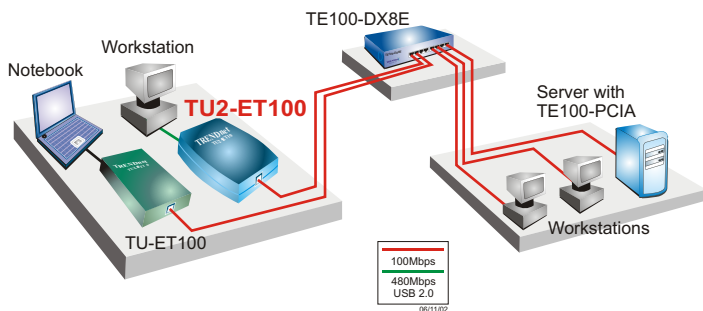

### RELATED PRODUCT

- **TU2-ET100:**  
Hi-Speed USB to Fast Ethernet Adapter
- **TU2-400:**  
4-port Hi-Speed USB Hub

### ORDERING INFORMATION

**TRENDware International, Inc.**  
3135 Kashiwa Street  
Torrance, CA. 90505. USA  
Tel: 310-891-1100  
Fax: 310-891-1111  
Web: [www.TRENDNET.com](http://www.TRENDNET.com)  
Email: [sales@trendware.com](mailto:sales@trendware.com)



**To Order Please Call:**  
**1-888-326-6061**