

## 5-Port USB 2.0 Host PCI Adapter TU2-H5PI

This 5-Port USB 2.0 Host PCI Adapter gives your Desktop PC five USB 2.0 ports so you can easily connect your peripherals and enjoy the benefits of high-speed USB 2.0

### FEATURES


- 4 x External Type A USB 2.0 Ports
- 1 x Internal Type A USB 2.0 Port
- 32-bit 33Mhz Host Interface Compliant to PCI Specification 2.2
- Supports PCI-Bus Power Management Interface Specification 1.1
- Compliant with USB 2.0 and USB 1.1 Specifications
- OHCI 1.1 (Open Host Controller Interface) Compliant
- EHCI .95 (Enhanced Host Controller Interface) Compliant
- Supports all USB speeds: Low-Speed (1.5Mbps), Full-Speed (12Mbps) and High-Speed (480Mbps)
- Switches to the Peripheral's Highest Supported Speed Automatically
- Fully Forward and Backward Compatible with USB 1.1 Devices
- Supports up to 127 USB Devices
- Compatible with Windows 98SE/ME/2000/XP/Vista/2003 Server and Mac OS 10.1~10.4
- Supports Plug & Play and Easy Installation
- 2-year limited warranty

# 5-Port USB 2.0 Host PCI Adapter TU2-H5PI

## SPECIFICATIONS

| Hardware           |   |
|--------------------|---|
| Interface          | <ul style="list-style-type: none"><li>• 32-bit PCI rev. 2.2</li></ul>   |
| USB Controller     | <ul style="list-style-type: none"><li>• OHCI, EHCI</li></ul>  |
| Standards          | <ul style="list-style-type: none"><li>• USB 2.0 &amp; USB 1.1</li></ul>   |
| Ports              | <ul style="list-style-type: none"><li>• 4 x External USB 2.0 Ports</li><li>• 1 x Internal USB 2.0 Port</li></ul>                |
| OS Compliant       | <ul style="list-style-type: none"><li>• Windows® 8.1, 8, 7, Vista, XP Mac OS® 10.4-10.9</li></ul>                               |
| Data Rate          | <ul style="list-style-type: none"><li>• High-Speed: 480Mbps</li><li>• Full-Speed: 12Mbps</li><li>• Low-Speed: 1.5Mbps</li></ul> |
| Power Consumption  | <ul style="list-style-type: none"><li>• 500mA (max) per port</li></ul>  |
| Dimensions (LxWxD) | <ul style="list-style-type: none"><li>• 134 x 121 x 21.6mm (5.2 x 4.76 x 0.85 inches)</li></ul>                                 |
| Weight             | <ul style="list-style-type: none"><li>• 70g. (0.15 lb)</li></ul>  |
| Temperature        | <ul style="list-style-type: none"><li>• Operating: 0°~ 40°C (32°~ 104°F)</li><li>• Storage: -10°~ 45°C (14°~ 113°F)</li></ul>   |
| Humidity           | <ul style="list-style-type: none"><li>• 85% (Non-Condensing)</li></ul>  |
| Certifications     | <ul style="list-style-type: none"><li>• FCC, CE</li></ul>   |

## NETWORKING SOLUTIONS

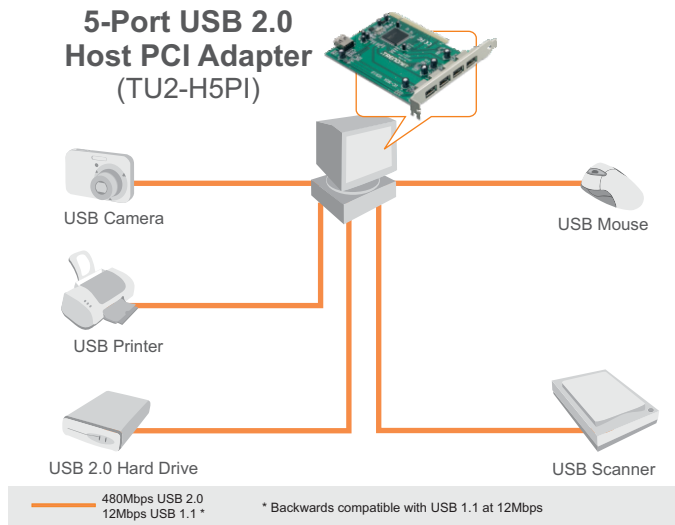

## ORDERING INFORMATION

**TRENDnet**<sup>®</sup>

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

