



USB 3.0 to SATA Adapter TU3-SA[V1.0R]

The USB 3.0 to SATA Adapter, model TU3-SA, quickly connects a Serial ATA I/II storage device to a 5Gbps USB 3.0 port on your Windows-based computer. Add storage capacity from a SATA or SATA II hard disk drive (2.5" or 3.5") or solid state drive (2.5" or 3.5").

With no hassle installation, simply plug into any free USB 3.0 port on your Windows computer and drivers will automatically install.

A power adapter provides full power to the connected storage device. Backward compatibility allows users to connect the adapter to USB 2.0 ports. Experience the time savings of transferring data at 5Gbps, or 10 times faster than USB 2.0 speeds.

FEATURES

- Connects a 2.5" or 3.5" SATA I/II Hard Disk Drive (HDD) or Solid State Drive (SSD) to a USB port on a Windows computer
- Compliant with Super-Speed USB 3.0 specification up to 5Gbps
- Backward compatible with USB 2.0, 1.1, and 1.0 Type A ports
- Compliant with SATA/SATA II Hard Disk Drives (2.5" and 3.5") and Solid State Drives (2.5" and 3.5")
- Supports USB Mass Storage Class Bulk-Only Transport specification
- Works with Windows 7, Vista and XP operating systems
- Plug & Play for easy Installation
- 2-year limited warranty

USB 3.0 to SATA Adapter

TU3-SA(V1.0R)


SPECIFICATIONS

HARDWARE

Interface	<ul style="list-style-type: none">• USB 3.0, 2.0, 1.1, 1.0• Serial ATA I/II
Connectors	<ul style="list-style-type: none">• Upstream: USB 3.0 (30cm)• Downstream: SATA I/II
Data Rate	<ul style="list-style-type: none">• Super-Speed: 5Gbps• High-Speed: 480Mbps• Full-Speed: 12Mbps
Supported OS	<ul style="list-style-type: none">• Windows® 8.1, 8, 7, Vista, XP • Mac OS® 10.4-10.9
Power Mode	<ul style="list-style-type: none">• Self-powered: 2.5" or 3.5" Hard Drives • Bus-powered: 2.5" Hard Drives
Power Consumption	<ul style="list-style-type: none">• Operating: 620mA • Standby: 100mA
Power Adapter	<ul style="list-style-type: none">• 12V, 2A External Power Adapter
Dimension	<ul style="list-style-type: none">• 60 x 35 x 13mm (2.4 x 1.4 x 0.5 in.)
Weight	<ul style="list-style-type: none">• 47 g (1.7 oz.)
Operating Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 80° C (14° ~ 176° F)
Humidity	<ul style="list-style-type: none">• Max. 90% (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC

NETWORKING SOLUTIONS

USB 3.0 to SATA Adapter (TU3-SA)

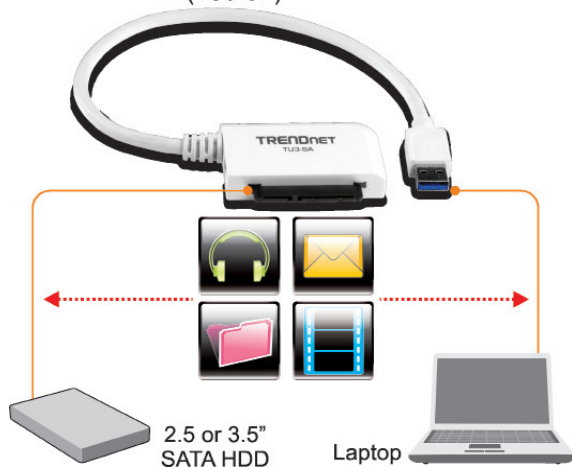

PACKAGE CONTENTS

TU3-SA

Multi-Language Quick Installation Guide

Power Adapter (12V DC, 2A)

RELATED PRODUCTS

TU3-H4	4-Port USB 3.0 Hub
TU3-H2EC	2-Port USB 3.0 ExpressCard Adapter
TU3-H2PIE	2-Port USB 3.0 PCI Express Adapter

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

