



SecurView Wireless Pan/Tilt/Zoom Internet Camera TV-IP410W (A1.0R)

The Wireless Pan/Tilt Internet Camera Server (TV-IP410W) provides real-time wireless surveillance over a large viewing area. Monitor people in your camera's viewing field and manage the camera from any Internet connection.

See more with one wireless Internet camera—remotely pan the camera side-to-side a remarkable 330 degrees and tilt up-and-down 105 degrees.

The TV-IP410W provides high quality video streams over an encrypted connection. Advanced intuitive software includes motion detection recording, email alerts and scheduled recordings. This camera's brilliant image quality, pan and tilt functionality and low light recording capabilities make it ideal for home, small office and business use.

FEATURES

- Compatible with wireless g and b devices
- Advanced encryption modes include WEP, WPA-PSK and WPA2-PSK
- Pan 330° side-to-side and tilt 105° up-and-down from any Internet connection
- High quality MJPEG video recording with up to 30 frames per second
- Supports TCP/IP networking, SMTP email, HTTP and other Internet protocols
- Record streaming video to your computer
- Sends image snapshots to FTP and email
- Motion detection that triggers email alerts, image snapshot and video recording
- Time stamp overlay
- Quick Universal Plug and Play (UPnP) installation
- Complimentary SecurView™ software: view and record up to 16 cameras simultaneously *
- 3-year limited warranty

**Monitoring multiple cameras may require a high performance CPU

SecurView Wireless Pan/Tilt/Zoom Internet Camera

TV-IP410W (A1.0R)

SPECIFICATIONS

Camera Specifications	
Image Sensor	
Sensor	• 1/4" color CMOS sensor
Resolution	• 640 x 480 pixel
Fixed Lens	• F: 4.0mm, F: 1.8
Viewing Angle	• 64 degree
Minimum Illumination	• 0.5 Lux
Video/Image Setting	
Video Format	• MJPEG
Image Frame Rate	• 30fps @VGA, QVGA, QQVGA
Frame Rate Setting	• 1 ~ 30fps (frames per second)
Compression Ration Setting	• 5 levels
Resolution	• 640 x 480, 320 x 240, 160 x 120
Digital Zoom	• 3x
Exposure Control, White Balance, Gain Control	• Automatic
Image Setting	• Adjustable brightness, sharpness, saturation
Flip Images	• Vertical/ horizontal
Light Frequency	• 50Hz, 60Hz or outdoor
Pan/Tilt	
Pan Range	• +165° ~ -165° degree
Tilt Range	• +90° ~ -15° degree
Auto-Patrol Positions	• 8 positions
Control	• Up, down, left, right, center
Communication	
LAN	• 10/100Mbps Auto-MDIX
Protocol	• TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, PPPoE, UPnP
Hardware Specifications	
System	
CPU	• ARM9 base
SDRAM	• 32Mbyte SDRAM
ROM	• 4Mbyte nor flash
OS	• Linux
System Requirement (Web Configuration)	
CPU	• Pentium III 350MHz or above
Memory Size	• 128MB or above
Resolution	• 800 x 600 or above
Browser	• Internet Explorer 6.0 or above
Supported OS	• Windows 2000/XP/Vista




SecurView Wireless Pan/Tilt/Zoom Internet Camera TV-IP410W (A1.0R)

SPECIFICATIONS

System Requirement (SecurView™ Software)	
CPU	• Pentium 4 1GHz or above
Memory Size	• 512MB or above
Resolution	• 1024 X 768 or above
Supported OS	• Windows 2000/XP/Vista
Physical / Environment	
Dimension	• 115 x 110 x 105 mm (4.53 x 4.33 x 4.13 in.)
Weight	• 335g (12.4oz.)
Power	• 12VDC, 1.5A external power adapter (3.5mm)
Power Consumption	• 9 watts (max)
LEDs	• Power (orange), link (green), LED enable/ disable support
Temperature	• Operating: 0° C ~45° C (32° F ~113° F) • Storage: -10° C ~-60° C (14° F ~ 140° F)
Wireless	
Standard	• IEEE 802.11b/g
Security	• 64/128-bit WEP, WPA-PSK, WPA2-PSK (TKIP/AES)
Antenna	• 2dBi detachable reverse SMA connector
Other	
GPIO	• 1 input and 1 output

NETWORKING SOLUTIONS

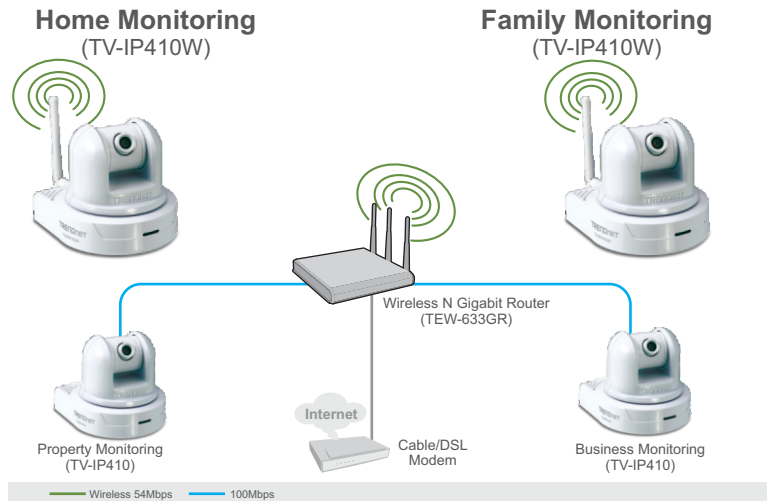

PACKAGE CONTENTS

- TV-IP410W
- Multi-Language Quick installation Guide
- CD-ROM (User's Guide and Utility)
- Cat.5 Ethernet (1.8 m/5.9 ft)
- Power adapter (12VDC, 1.5A)
- GPIO adapter
- Mounting kit

RELATED PRODUCTS

TV-IP410	SecurView Pan/Tilt/Zoom Internet Camera
TV-IP422	SecurView Day/Night Pan/Tilt/Zoom Internet Camera
TV-IP422W	SecurView Wireless Day/Night Pan/Tilt/Zoom Internet Camera

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA
 Tel: 1-310-961-5500
 Fax: 1-310-961-5511
 Web: www.trendnet.com
 Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061