



Megapixel HD Wireless Day/Night PTZ Network Camera TV-IP662WI (v1.0R)

- Pan and tilt from a mobile device
- Megapixel 720p HD resolution
- Night vision up to 7.5 meters (25 ft.)
- High speed Wireless N network connection
- Receive motion and sound detection video clips via email
- Record video to a Micro SD card or NAS device (sold separately)
- Two way audio
- Free mobile app and pro-grade management software

The Megapixel HD Wireless Day/Night PTZ Network Camera, model TV-IP662WI, provides day and night monitoring over a large area. Pan and tilt the camera from a mobile device, record video to a Micro SD Card, and have the camera email motion detection video clips. A wall/ceiling mounting kit is included and the camera's off white housing blends into most environments.

Features



Megapixel Video

Experience Megapixel 720p HD video with H.264 video compression



Night Vision

Night vision up to 7.5 meters (25 ft.) in complete darkness (indoor rating)



Dynamic DNS

Support for Dyn.com and NO-IP.com dynamic DNS service providers



Wireless N

High speed wireless N connection



PTZ

Pan, tilt, and zoom the camera from a mobile device



Preset Auto-Patrol

Define preset PTZ auto-patrol points



Digital Zoom

Zoom in by a factor of four



Motion and Sound Detection Emails

Receive email snapshots and video clips triggered by motion and sound



Mounting Hardware

Mounting bracket supports ceiling installation



Two-Way Audio

Built-in microphone and connect a third party speaker for two-way audio



Storage

Store video to a Micro SD card (up to 32 GB) or to a Samba server



Free Apps


See live video on a mobile device with free TRENDnetVIEW Apple® and Android™ apps



Complimentary Software

Pro-grade TRENDnetVIEW Pro software to manage up to 32 TRENDnet cameras

Networking Solution

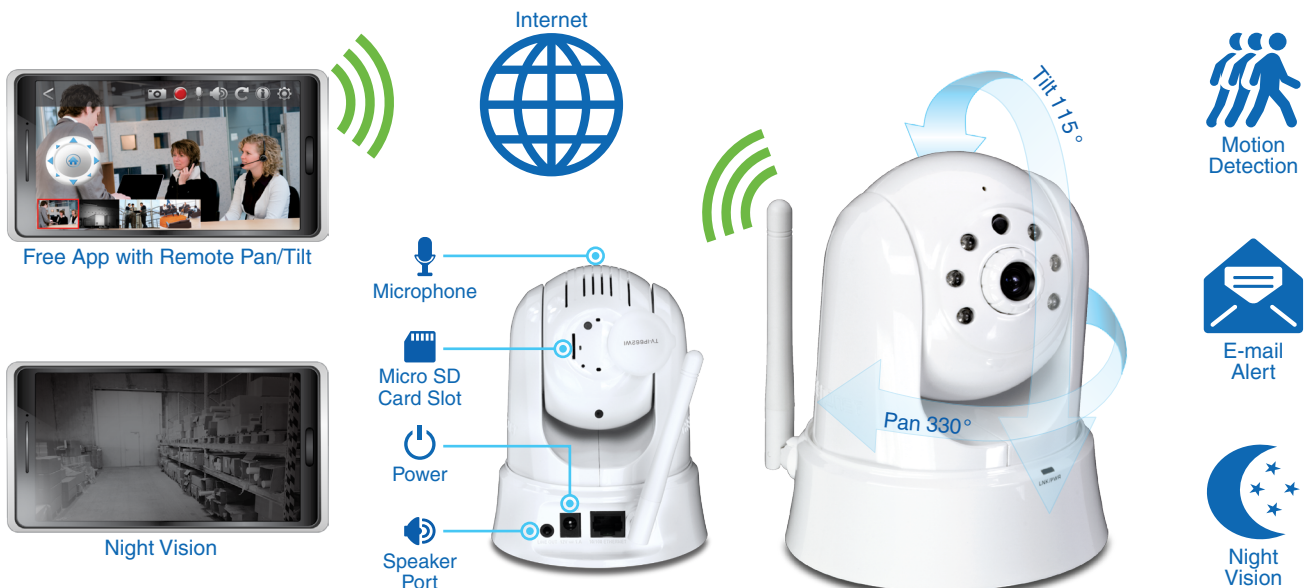

Specifications

Lens

- Focal Length: 4.6 mm, F2.0
- Focal Depth: 20 cm - infinity
- Manual focus lens
- Sensor: 1/4" CMOS sensor
- Zoom: 4x Digital

Viewing Angle

- Diagonal: 58°
- Horizontal: 49°
- Vertical: 31°

Pan & Tilt

- Pan: 330°
- Tilt: 115°
- Auto-patrol preset positions (non-continuous)

Minimum Illumination

- IR off: 1 lux
- IR on: 0 lux
- 7.5 meter (25 ft.) IR illumination distance (indoor)

Video Codecs/Resolution

- H.264: 1280 x 720 up to 30 fps
- MPEG4: 1280 x 720 up to 30 fps
- JPEG: 1280 x 720 up to 5 fps (or 640 x 480 up to 30fps)

Audio

- Built-in microphone
- 3.5 mm audio jack for 3rd party speakers

Standard

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.11b
- IEEE 802.11g
- IEEE 802.11n

Device Interface

- 10/100 Mbps port
- Micro SD slot (up to 32 GB)
- Reset button
- WPS button
- LED indicator
- 3.5 mm speaker jack
- Power jack

Network Protocol

- IPv4, DHCPv6, ARP, TCP, UDP, ICMP, Bonjour, ONVIF Profile S
- DHCP, NTP, DNS, DDNS, SMTP, FTP, Samba
- HTTP
- PPPoE
- UPnP
- RTP, RTCP, RTSP, 3GPP

Dimension

- Camera: 128 x 100 X 113 mm (5.0 x 3.9 x 4.5 in.)
- With Bracket: 128 x 158 x 142 mm (5.0 x 6.2 x 5.6 in.)

Weight

- Camera: 326 g (11.5 oz)
- With Bracket: 556 g (19.6 oz)

Operating Temperature

- 0 – 40 °C (32 – 104 °F)

Humidity

- Max. 90% non-condensing

Power

- Input: 100 - 240 V AC , 50 - 60 Hz, 0.5A
- Output: 12 V DC 1 A; external power adapter
- Max. consumption: 10.5 W

Warranty

- 3 year limited

Management Interface

- Image settings: brightness, contrast, saturation, black/white, hue, mirror, flip, indoor/outdoor, light frequency, white balance, day/night mode with IR sensitivity adjustment, slow shutter
- Recording: to a Samba share, Mirco SD Card, or through software
- Recording Type: continuous, scheduled, motion, or sound detection
- Event Trigger: motion or sound detection event triggers
- Event capture: snapshot or video (up to 15 seconds)
- Event activity: email or FTP alert
- Dynamic DNS: support for NO-IP.com and Dyn.com

- Settings: Max. 20 user accounts and support for remote management
- Compatibility: Internet Explorer® 9 or higher, Safari® 4 or higher

TRENDnetVIEW Pro Software

- Supports up to 32 cameras
- Multiple language support
- Set recording options (motion detection, schedule, event trigger)
- Search and playback
- Custom viewing modes and options
- Compatibility: Windows® 10, 8.1, 8, 7, Vista, XP, Windows Server® 2003, 2008

TRENDnetVIEW App

- Free Apple® and Android™ apps
- View your camera on your mobile device
- PTZ controls
- Take snapshots
- Digital zoom
- 2- way audio support

Package Contents

- TV-IP662WI
- Multi-Language Quick Installation Guide
- CD-ROM (Utility, Software, & User's Guide)
- Power adapter (12 V DC, 1A) (1.5 m/5 ft.)
- Network cable (1.8 m/6 ft.)
- Camera mounting hardware

