



TK-200K 2-Port KVM Switch Kit

TRENDnet's TK-200K 2-Port KVM Switch Kit lets you manage two PC's with just one keyboard, monitor and mouse. Switch between two PC's with a simple press of a button! TRENDnet's TK-200K comes with a 2-port KVM Switch and two cables, all you need to control two computers with a single keyboard, monitor, and mouse. With its Hot-Plug, Auto-Scan, Audible Feedback, and Hot-Key Operation features, the TK-200K is the perfect choice for managing 2 PC's.



FEATURES

- > Use one keyboard, monitor, and mouse to control two computers
- > PS/2 Keyboard/Mouse emulation
- > 2-Port KVM switch in compact size design
- > Includes two KVM cables (1.2 meters / 4 feet)
- > Support Microsoft Intellimouse, Logitech Net Mouse, Optical Mouse...etc.
- > Support DOS, Windows 3.x/95/98/ME/NT/2000/XP, Netware, Unix, Linux, and more
- > Hot-Plug feature, add PC's or remove connected PC's for maintenance without powering down the KVM switch or other PC's.
- > Support very High Video Quality, up to 1920 x 1440 with 200Mhz bandwidth
- > No software required, easy PC selection via Push Button and Hot-Keys
- > Auto-Scan Mode for monitoring PC's.
- > Keyboard status restored when switching between PC's.
- > LED display for easy status monitoring
- > Beeping sound for port switching confirmation
- > 1-Year Warranty

BENEFITS

- > **Integration Friendly:**
Does not require driver/software for the installation and operation. Switching between PC's with the push button or Hot-Key operation.
- > **Flexible:**
Hot-Plug feature, add PC's or remove connected PC's without powering off the KVM Switch or the other PC's.
- > **Cost Effective:**
Manage up to four PC's with single keyboard, monitor, and mouse. Save on equipment cost, utility, and space.
- > **Performance:**
Support very High Video Quality up to 1920 x 1440 with 200Mhz bandwidth. Keyboard status is saved for each PC.



TK-200K

2-Port KVM Switch Kit

SPECIFICATIONS

Computer Connections:

- 2

Port Connectors:

- Keyboard & Mouse: PS/2 type 6-pin mini Din (female)
- Monitor: 15-pin HDDB type (female)

KVM Cable:

- 2 sets of high-grade KVM cables (UL2919 for VGA monitor, male-to-male)

Length:

- 1.2 meters (4 feet)

Console Port:

- 1

Port Selection:

- Push Button and Hot-Keys

Auto-Scan Intervals:

- 4 seconds

Switching Confirmation:

- Beeping sound

Keyboard State:

- Saved and restored

Power Supply:

- Draw power from computer's keyboard port.
- Optional external power supply (for battery powered PC): 5V~9V DC, 500mA~1A (connector jack center positive)

Dimensions:

- 113 x 84 x 31 mm (4.45 x 3.31 x 1.22 inches)

Weight:

- Appro. 155 g. (5.5 Oz.)

Temperature:

- Operating: 0° ~ 40°C (32° ~ 104°F)
- Storage: -20° ~ 60°C (-4° ~ 140°F)

Humidity:


- 0%~80%, Non-Condensing

Certifications:

- FCC, CE



NETWORKING SOLUTIONS

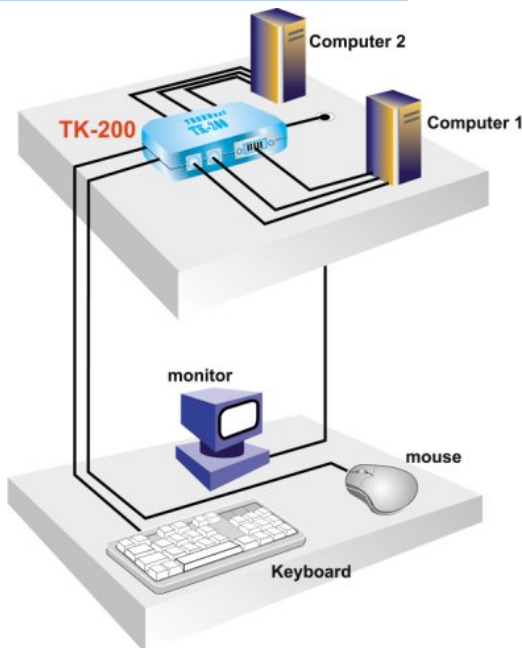

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- TK-200K: 2-Port KVM Switch Kit
- TK-205i: 2-Port KVM Switch with Integrated Cables
- TK-400K: 4-Port KVM Switch
- TK-401R: 4-Port Rack-Mountable KVM Switch
- TK-800R: 8-Port KVM Stackable Rack-Mountable Switch (with OSD)
- TK-801R: 8-Port Rack-Mountable KVM Switch

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA