



TK-401R **4-Port Rack Mount KVM Switch**

TRENDnet's TK-401R 4-Port KVM Switch allows you to manage up to 4 PCs with just one keyboard, monitor, and mouse. Switch between multiple PCs with a simple press of a button! Eliminate the hassle of cable swapping. Save money and space with the TK-401R. This KVM Switch also comes with a rack-mount kit for mounting on EIA-19" rack in the equipment room and computer lab. Rich in features such as Hot-Plug, Auto-Scan, and Hot-Key operations; TRENDnet TK-401R is the perfect choice for managing multiple PCs.



FEATURES

- > Support Microsoft Intellimouse, Microsoft Intellimouse Explorer, Logitech NetMouse, Optical Mouse, or other fully compatible MS Mouse.
- > PS/2 Keyboard/Mouse emulation
- > Support DOS, Windows 3.x/95/98/ME/NT/2000/XP, Netware, Unix, Linux, and more
- > Very high video quality – up to 1920 x 1440 resolution and 200Mhz bandwidth
- > No software required – easy PC selection via Push Buttons and Hot-Key Operation
- > Hot-Plug feature – add or remove PC's without powering off the KVM switch or other PC's
- > Auto-Scan Mode for monitoring PCs, with configurable scan interval from 5~99 seconds
- > Keyboard status restored when switching PCs
- > LED Display for easy status monitoring
- > Beeping sound for port switching confirmation
- > EIA-19" rack-mountable (hardware included)
- > 1-Year Warranty

BENEFITS

- > **Integration Friendly:**
Does not require driver/software for the installation and operation. Switching between PC's with the Push Buttons and Hot-Key operation.
- > **Flexible:**
Hot-Plug feature – add PC's or remove connected PC's without powering off the KVM Switch or the other PC's.
- > **Cost Effective:**
Manage multiple PC's with single keyboard, monitor, and mouse. Save on equipment cost, utility, and space.
- > **Performance:**
Support very High Video Quality up to 1920 x 1440 with 200Mhz bandwidth. Keyboard status is saved for each PC.



TK-401R

4-Port Rack Mount KVM Switch

SPECIFICATIONS

Computer Port:

- 4 ports.
- Keyboard and Mouse: PS/2 type mini Din 6-pin
- VGA: HDBB 15-pin (female)

Console Port:

- 1 port. Keyboard and Mouse: PS/2 type mini Din 6-pin, VGA HDBB 15-pin (female)

PC Selection:

- Hot-Keys and Push Buttons

LED Segment:

- Two LED indicators per port (PC Link green and PC Active red)

Auto-Scan Intervals:

- 5~99 seconds

Keyboard State:

- Saved and restored

Video Bandwidth:

- 200MHz

Power Adapter (optional):

- External AC Power adapter, 12VDC, 1A (or 9VDC, 1A)

Dimensions:

- 220 x 100 x 44.5 mm (8.7 x 4 x 1.77 inches)

Weight:

- Approximately 1 Kg. (2.2 lbs)

Temperature:

- Operating: 0°~40° C (32°~104° F)
- Storage: -20°~60° C (-4~140° F)

Operating Humidity:


- 0~80%, Non-Condensing

Certifications:

- FCC, CE



NETWORKING SOLUTIONS

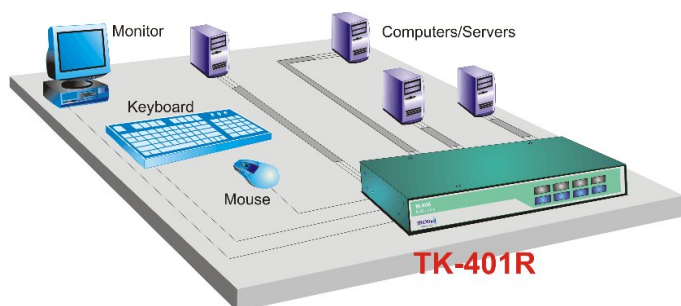

PRODUCT INFORMATION

- > **TK-401R:** 4-Port Rack Mount KVM Switch
- > **TK-801R:** 8-Port Rack Mount KVM Switch
- > **TK-200:** 2-Port KVM Switch Kit
- > **TK-200K:** 2-Port KVM Switch Kit
- > **TK-400:** 4-Port KVM Switch
- > **TK-400K:** 4-Port KVM Switch Kit
- > **TK-800R:** 8-Port Rack Mount KVM Switch
- > **TK-C06:** 6 feet KVM Cable (male-to-male)
- > **TK-C10:** 10 feet KVM Cable (male-to-male)

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com



To Order Please Call:
1-888-326-6061