




16-Port Gigabit Switch

TEG-S17 (V2)

- 16 x Gigabit RJ45 ports
- Sturdy metal switch
- Built-in power supply
- Supports VLAN Passthrough, QoS Passthrough, Loopback Detection, and IGMP Snooping
- Fanless design
- 1U 19" rackmount brackets included
- Lifetime Warranty
- NDAA / TAA compliant (U.S. and Canada only)

The 16-Port Gigabit Switch, model TEG-S17, provides high-bandwidth performance, ease of use, and reliability. Boost office network efficiency and eliminate network congestion with gigabit speeds and a total switching capacity of 32Gbps with full-duplex mode. A built-in universal power supply reduces cable clutter, and diagnostic LEDs help with network troubleshooting. This sturdy metal switch also supports VLAN Passthrough, IGMP Snooping for optimized multicast streaming, DSCP QoS Passthrough for smarter traffic prioritization, and Loop Prevention to maintain a stable, interruption free network. Ideal for dependable high speed connectivity in demanding environments.

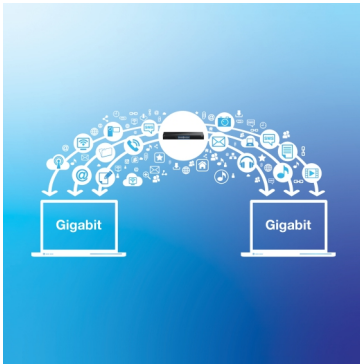

Gigabit Speeds

Gigabit ports provide high-speed network connections to 16 devices, and a 32Gbps switching capacity allows data traffic to flow smoothly, reducing traffic bottlenecks.



Integration Flexibility

Supports VLAN Passthrough, QoS Passthrough, Loopback Detection, and IGMP Snooping.



Fanless

Fanless design lowers energy consumption and reduces distracting operating noise.

FEATURES



Plug and Play

Simply power up the switch and plug in connected devices



Ports

16 x Gigabit Ethernet ports



Switching Capacity

32Gbps switching capacity



Rackmount Design

With a sturdy metal housing and included rackmount brackets, this switch is well-suited for 19" 1U rack installations



Integration Flexibility

Supports VLAN Passthrough, QoS Passthrough, Loopback Detection, and IGMP Snooping



Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 12KB), for increased performance



Fanless

Fanless design lowers energy consumption and eliminates operating noise



LED Indicators


LEDs convey power, link, and activity



Internal Power Supply

100 – 240V AC, 50/60Hz internal universal switching power supply

NETWORKING SOLUTION

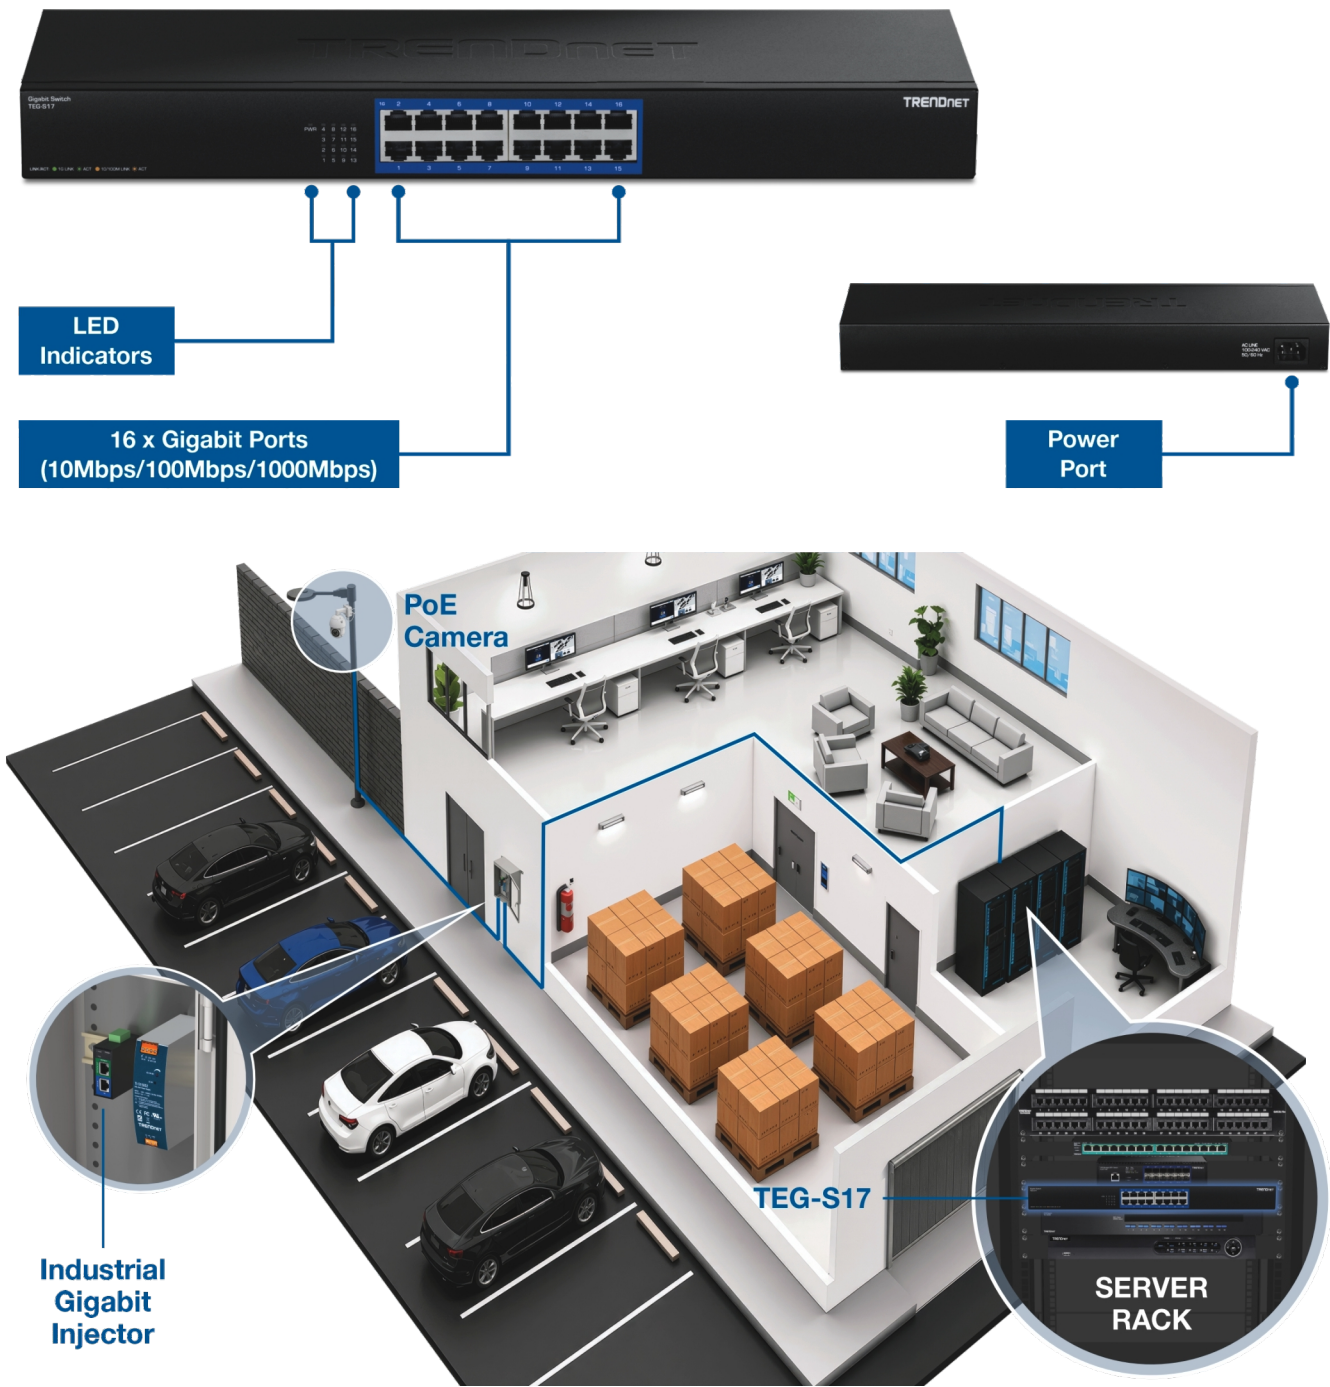

SPECIFICATIONS

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3ab

Device Interface

- 16 x Gigabit ports (10Mbps/100Mbps/1000Mbps)
- LED indicators

Performance

- Switching Capacity: 32Gbps
- RAM Buffer: 1024KB
- MAC Address Table: 16K entries
- Forwarding Rate: 23.8Mpps (64-byte packet size)
- Jumbo Frames: 12KB

Special Features

- VLAN Passthrough
- IGMP Snooping v1/v2/v3
- DSCP QoS Passthrough
- Loop prevention
- Multicast Flooding

Power

- Internal power supply: 100 – 240V AC, 50/60 Hz, 0.5A
- Max. Consumption: 8.43W

Fan/Acoustics

- Fanless design

MTBF

- 712,274 hours @ 25° C

Operating Temperature

- 0° – 40° C (32° – 104° F)

Operating Humidity

- Max. 90% non-condensing

Dimensions (L x W x H)

- 440 x 131 x 44mm (17.4 x 5.16 x 1.73 in.)

Weight

- 1.47kg (3.23 lbs.)

Certifications

- FCC
- CE
- LVD
- ETL

Warranty

- Lifetime Warranty

Package Contents

- TEG-S17
- Rackmount kit
- Power cord (1.5m / 4.9 ft.)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

TRENDnet offers a lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty.