



## TRENDnet 9-Port Unmanaged 2.5G Switch with 10G SFP+ Port, TEG-S5091, 8 x 2.5GBASE-T Ports, 60Gbps Switching Capacity, Fanless, Wall Mountable, Black

TEG-S5091 (v1.0R)


- **DEVICE INTERFACE:** 8 x 2.5GBASE-T ports (100Mbps/1Gbps/ 2.5Gbps); 1 x 10G SFP+ slot (1Gbps / 10Gbps); LED indicators
- **2.5G PORTS:** The 9 Port network switch is equipped with 2.5GBASE-T RJ-45 ports that provide higher gigabit speeds capable of up to 2.5Gbps over existing Cat5e or better cabling.
- **10 GIGABIT SFP+ SLOT:** A dedicated 10G SFP+ slot for high-speed network connections, providing a cost-effective solution in adding 10G link capability to an SMB network.
- **SWITCHING CAPACITY:** The unmanaged switch is equipped with a 60Gbps Switching Capacity
- **COMPATABILITY:** The 9 Port Ethernet switch is backwards compatible with 10/100/1000Mbps devices.
- **WALL MOUNTABLE:** The 2.5G unmanaged switch features a durable metal housing with a convenient wall mountable design for greater installation flexibility.
- **FANLESS DESIGN:** The fanless design lowers energy consumption and eliminates distracting operating noise.
- **IEEE STANDARD:** IEEE 802.3bz (2.5G) and IEEE 802.3ae (10G SFP+) Compliant
- **TRENDnet LIFETIME PROTECTION:** The TEG-S5091 9-Port Unmanaged 2.5G Switch is backed with Lifetime Manufacturer Protection
- Lifetime Warranty
- NDAA / TAA compliant (U.S. and Canada only)

Expand your network's bandwidth and reduce digital bottlenecks with TRENDnet's 9-Port 2.5G Unmanaged Switch with 10G SFP+ Port. This 2.5G switch with an SFP+ port comes equipped with 2.5GBASE-T RJ-45 ports that provide speeds capable of up to 2.5Gbps over your existing Cat5e or better cabling, and a 10G SFP+ slot for ultra-fast, long-distance fiber networking. Each 2.5G switch with an SFP+ port features a durable metal enclosure and can be mounted to the wall for setup flexibility. The fanless design lowers energy consumption and eliminates operating noise. TRENDnet's reliable 2.5G Ethernet switches with a 10G SFP+ port are cost-effective solutions to increase your network's throughput.



### 2.5G Ports

Equipped with 2.5GBASE-T RJ-45 ports that provide ultra-fast speeds capable of up to 2.5Gbps over existing Cat5e or better cabling.

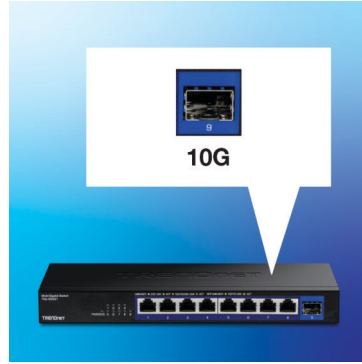

### 10G SFP+ Port

A dedicated 10G fiber SFP+ port for an ultra-fast network connection provides a cost-effective solution in adding 10G link capability.



### Fanless

The fanless design of the 2.5G switches with an SFP+ port lowers energy consumption costs and eliminates operating noise.

## FEATURES



### Easy Installation

No configuration needed, simply connect network devices to the 2.5G switch with an SFP+ port



### 2.5G Ports

Equipped with 2.5GBASE-T RJ-45 ports, the 2.5Gb Ethernet switch provides ultra-fast speeds capable of up to 2.5Gbps over existing Cat5e or better cabling



### 10G SFP+ Port

Dedicated 10G fiber SFP+ port for an ultra-fast network connection provides a cost-effective solution in adding 10G link capability to an SMB network



### Switching Capacity

60Gbps switching capacity



### Fanless

Fanless design on the 2.5G switch with an SFP+ port lowers energy consumption and eliminates operating noise



### Housing Design

Sturdy metal housing



### Wall Mountable

Features a convenient wall mountable design for greater installation flexibility





### Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 12KB) for increased performance



### LED Indicators

LED indicators on this 2.5G switch with an SFP+ port conveys port status

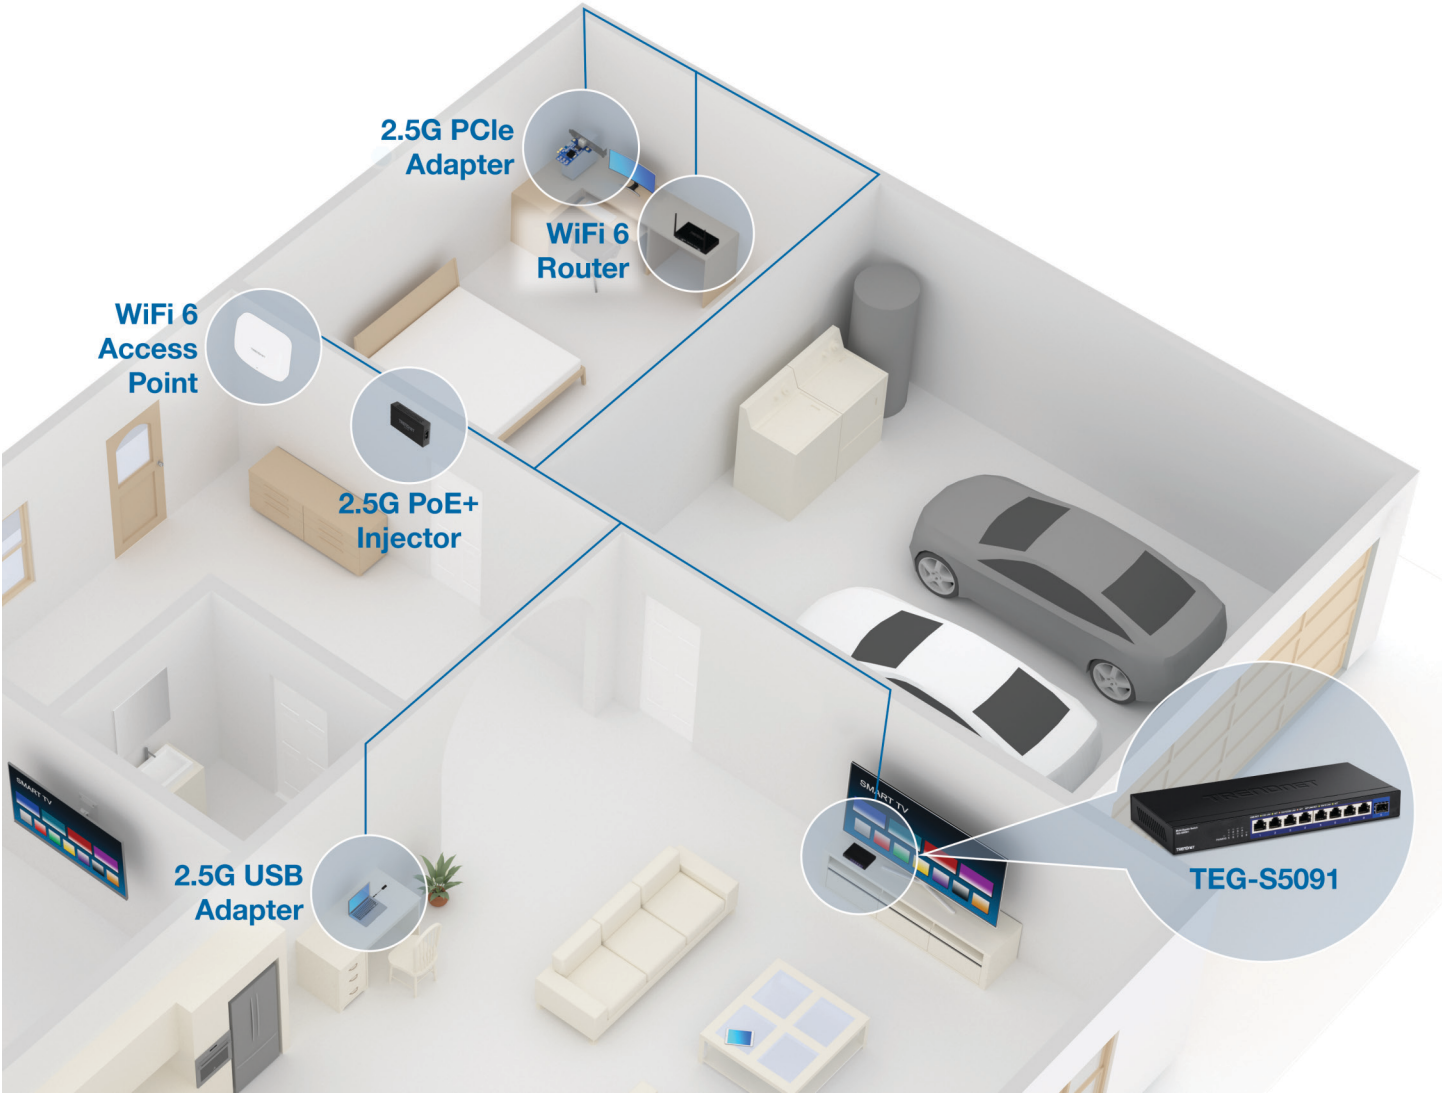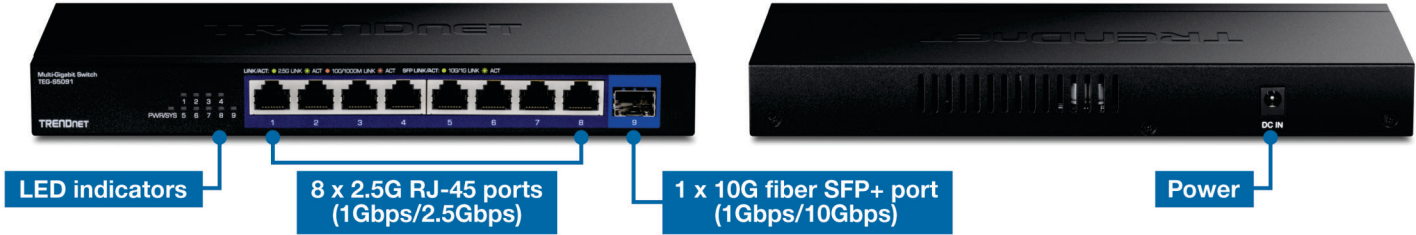

## SPECIFICATIONS

### Standards

- IEEE 802.3x
- IEEE 802.3z
- IEEE 802.3ab
- IEEE 802.3ae
- IEEE 802.3az
- IEEE 802.3bz

### Device Interface

- 8 x 2.5G RJ-45 ports (1Gbps/2.5Gbps)
- 1 x 10G fiber SFP+ port (1Gbps/10Gbps)
- LED indicators

### Data Transfer Rate

- Gigabit: 2000Mbps (full duplex)
- 2.5 Gigabit: 5Gbps (full duplex)
- SFP: 2Gbps (full duplex)
- SFP+ 20Gbps (full duplex)

### Performance

- Switching Capacity: 60Gbps
- RAM Buffer: 1MB
- MAC Address Table: 4K entries
- Forwarding Rate: 44.6Mpps (64-byte packet size)
- Jumbo Frames: 12KB

### Special Features

- Wall mountable

### Power

- Input: 100 – 240V AC, 50/60 Hz, 0.5A
- Output: 12V DC, 1A external power adapter
- Max. Consumption: 9.5W

### Fan/Acoustics

- Fanless design

### MTBF

- 674,176 hours

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 90% non-condensing

### Dimensions (L x W x H)

- 240 x 105 x 27mm (8.03 x 4.13 x 1.06 in.)

### Weight

- 414g (14.6 oz.)

### Certifications

- FCC
- CE

### Warranty

- 3 year

### Package Contents

- TEG-S5091
- Quick Installation Guide
- Power adapter (12V DC, 1A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

TRENDnet offers a lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty.