



8-Port 10/100Mbps Layer 2 Managed Switch with Gigabit Port and Mini-GBIC Slot

TEG-S811Fi (1.0R)

The 8-Port 10/100Mbps Layer 2 Managed Switch with Gigabit Port and Mini-GBIC Slot (TEG-S811Fi) delivers powerful layer 2 performance and security management tools to network administrators.

Built-in Gigabit and Mini-GBIC slots provide additional network connections to increase overall network performance. Manage your network from anywhere and protect what your company values most.

The feature rich TEG-S811Fi incorporates Simple Network Management Protocol (SNMP), Quality of Service (QoS), Trunking and Port/Tag-based VLANs. Included is a robust 3.6Gbps backplane which may be remotely accessed. Configure the switch with ease using your choice of a Web browser, CLI, Telnet or HyperTerminal. Use this switch as a foundation for a highly scalable, easy to manage secure network.

FEATURES

- Instantly expand network operations with this 8-port Layer 2 managed switch
- 8 x 10/100Mbps RJ-45 Auto-MDIX ports
- 1 x 10/100/100Mbps RJ-45 Auto-MDIX port and 1x 1000Base Mini-GBIC slot
- Robust 3.6Gbps switching capacity IGMP support for multi-media applications
- Quality of Service (QoS) for bandwidth prioritization
- Includes SNMP, RMON, port Mirroring, Spanning Tree protocol and port base VLAN/802.1Q
- Port Trunking, Broadcast Storm filtering, flow control and port security
- Flexible load distribution control and fail-over functions
- Store-and-forward switching architecture
- Configuration via RS-232 console port, telnet and any Web browser (HTTP)
- Supports up to 8,000 MAC address entries
- System backup, restore and firmware upgrades
- 3-Year Limited Warranty

8-Port 10/100Mbps Layer 2 Managed Switch with Gigabit Port and Mini-GBIC Slot

TEG-S811Fi

SPECIFICATIONS


Hardware	
Standards	<ul style="list-style-type: none"> IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree/ IEEE802.1w Rapid Spanning Tree IEEE802.1p Class of Service IEEE 802.1x User Authentication (Radius) IEEE802.1Q VLAN Tag
Interface	<ul style="list-style-type: none"> 8 x 10/100TX Ports RJ-45 with Auto MDI/MDI-X Function 1 x Gigabit Fiber Mini-GBIC 1 x 10/100/1000T Ports RJ-45 with Auto MDI/MDI-X Function 1 x RS-232 DB-9 Connector for Switch Management
Packet Forwarding and Filtering Rate	<ul style="list-style-type: none"> Gigabit: 1,488,000 Packets per Second per Port 100M Ethernet: 148,800 Packets per Second per Port
Cabling	<p>Network:</p> <ul style="list-style-type: none"> 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 Cable 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E Cable EIA/TIA-568 100-ohm (100m) EIA/TIA-568 100-ohm (100m) <p>Network:</p> <ul style="list-style-type: none"> LC (Multi-Mode): 50/125um~62.5/125um LC (Single Mode): 9/125um~10/125um Available Distance: 2KM (Multi-mode) / 30KM (Single-Mode) Wavelength: 1310nm (Multi-Mode/ Single Mode)
Console Port	<ul style="list-style-type: none"> RS-232, female 9-Pin Serial Port (M-M Serial Cable Included)
Protocol/Topology	<ul style="list-style-type: none"> (CSMA/CD) / Star
Buffer Memory	<ul style="list-style-type: none"> 1Mbits Data Buffer
Filtering Address Table	<ul style="list-style-type: none"> 8K MAC Address Entries
Bandwidth	<ul style="list-style-type: none"> Up to 3.6Gbps
LED Display	<ul style="list-style-type: none"> System Power (Green) 10/100TX Port: Link/Activity (Green), Full-Duplex/Collision (Yellow), 100Mbps (Green) Gigabit Copper Port: 1000/100Mbps (Green/Yellow), Link/Activity (Green), Full Duplex/Collision (Yellow) Mini GBIC: Link/Activity (Green)
Power	<ul style="list-style-type: none"> Input: 100~240VAC, 50/60Hz Internal Power Supply
Power Consumption	<ul style="list-style-type: none"> 10.8 watts
Dimensions	<ul style="list-style-type: none"> 217 x 160 x 43mm (8.5 x 6.2 x 1.6 inch) (W x H x D)
Weight	<ul style="list-style-type: none"> 0.8 Kg. (1.12lb.)
Temperature	<ul style="list-style-type: none"> Operating: 0° ~ 45° C (32° ~ 113° F) Storage: -40° ~ 70° C (-40° ~ 158° F)
Humidity	<ul style="list-style-type: none"> 5%~95% (Non-Condensing)
Safety Emissions	<ul style="list-style-type: none"> FCC, CE
Software	
Management	<ul style="list-style-type: none"> SNMP v1 v2c, v3/ Web/Telnet/CLI/Menu Driven** Management
Trunk	<ul style="list-style-type: none"> LACP Port Trunk: 4 Trunk Groups/Maximum 4 Trunk Members
Class of Service	<ul style="list-style-type: none"> Support IEEE802.1p Class of Service, Per Port Provides 4 Priority Queues
QoS	<ul style="list-style-type: none"> QoS Determined by Port, Tag and IPv4 Type of Service, IPv4/IPv6 Different Service
VLAN	<ul style="list-style-type: none"> Port Based VLAN IEEE 802.1Q Tag VLAN (256 Entries)/ VLAN ID (Up to 4K, VLAN ID From 1 to 4096.) GVRP (256 Groups) Double Tag VLAN (Q in Q)*
X-Ring	<ul style="list-style-type: none"> Support X-ring, Dual Homing, and Couple Ring 256 Multicast Groups and IGMP Query
IGMP	<ul style="list-style-type: none"> Support IGMP Snooping v1,v2 256 Multicast Groups and IGMP Query
Port Mirror	<ul style="list-style-type: none"> Supports 3 Mirroring Types: "RX, TX and Both Packets".
Port security	<ul style="list-style-type: none"> Supports 100 static MAC Address Entries And 100 MAC Filter Entries
Spanning Tree	<ul style="list-style-type: none"> Support IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree
IP Security	<ul style="list-style-type: none"> Supports 10 Permitted Access IP Addresses

8-Port 10/100Mbps Layer 2 Managed Switch with Gigabit Port and Mini-GBIC Slot TEG-S811Fi (1.0R)

SPECIFICATIONS

Software	
Login Security	<ul style="list-style-type: none"> Support IEEE802.1X Authentication/RADIUS
Bandwidth Control	<ul style="list-style-type: none"> Ingress Packet Filter and Egress Packet limit Egress Rate Supports All Packet Types With Rate Limits at 100K~250Mbps Ingress Filter Packet Types Include Broadcast/Multicast/Unknown, Unicast Packet, Broadcast/Multicast Packet and Broadcast Packet Only/ All of Packet. Packet Filter Rate: 100k to 250Mbps
Flow Control	<ul style="list-style-type: none"> Supports System Log Record And Remote System Log Server
System Log	<ul style="list-style-type: none"> Supports System Log Record And Remote System Log Server
SMTP	<ul style="list-style-type: none"> SMTP Server support And 6 E-mail Accounts For Event Alerts
SNMP Trap	<ul style="list-style-type: none"> Up to 3 Trap Stations, Cold start, Port Link Up, Port Link Down, Authentication Failure, Power Status Private Trap and X-ring Topology Change
DHCP	<ul style="list-style-type: none"> Provides DHCP Client/ DHCP Server
DNS	<ul style="list-style-type: none"> Provides DNS Client Feature and Supports Primary And Secondary DNS servers
SNTP	<ul style="list-style-type: none"> Supports SNTP To Synchronize System Clock
Firmware Update	<ul style="list-style-type: none"> Support TFTP Firmware Update, TFTP Backup and Restore
Configuration Upload and Download	<ul style="list-style-type: none"> Support Text Format Configuration File For System Quick Installation

NETWORKING SOLUTIONS

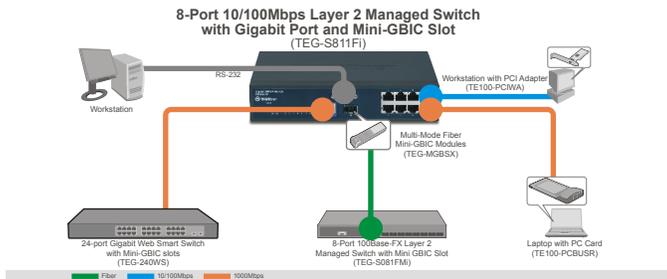

PACKAGE CONTENTS

- TEG-S811Fi
- Quick Installation Guide
- CD-ROM user guide
- Power cord (1 m, 3.28 ft)
- RS-232 cable (1 m, 3.28 ft) / rack mounting kit

RELATED PRODUCTS

TEG-S081FMi	8-Port 100base-FX Layer 2 Managed Fiber Switch w/ Mini-GBIC Port
TE100-S810Fi	8-Port 10/100Mbps Layer 2 Managed Switch w/ 100Base-FX Port
TEG-MGBSX	Mini-GBIC Multi-Mode SX Module (550M, 1,800Ft.)

ORDERING INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061