



54Mbps 802.11g Wireless 1-Port USB 2.0 Print Server

TEW-P1UG (b1.1R)

TEW-P1UG is a print server that transforms virtually any stand-alone USB printer into a shared network printer. The TEW-P1UG provides an IEEE 802.11g 54Mbps wireless interface for integrating into existing wireless networks. The TEW-P1UG is designed for printers equipped with USB 2.0 compliant printer port and it is an ideal network solution to convert conventional USB printers into a shared resource on the network.

FEATURES

- Wi-Fi compliant with IEEE 802.11b/g devices
- Compliant with USB 2.0 high-speed printing
- One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet Port
- Advance wireless encryption: WEP, WPA-PSK, WPA2-PSK
- LPR printing for Windows
- IPP printing for Windows 7/Vista/2003 Server/XP/2000
- Printing over Email and print error email notification
- Second HTTP port for remote Web configuration
- Supports Windows Graphical Devices Interface (GDI) printers*
- Supports SNMP v1.0 and MIB II (RFC-1213)
- Supports Macintosh Rendezvous Zero Configuration**
- Windows-based setup wizard and configuration utility
- Web-based (HTTP) configuration
- Built-in flash memory for easy firmware upgrade
- 3-Year limited warranty

* GDI feature is only compatible with HP GDI printer

** Mac Systems are only compatible with Post-Script printers


54Mbps 802.11g Wireless 1-Port USB 2.0 Print Server

TEW-P1UG(b1.1R)

SPECIFICATIONS

Hardware	
Standards	• Wired: IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX • Wireless: IEEE 802.11g
Printer Interface	• USB 2.0, 1.1 Compliant USB Type A Port
LAN Port	• 10/100Mbps Auto-MDIX UTP/STP RJ-45 Port
CPU/ SDRAM / Flash ROM	• RDC R2886 150MHz / 2MByte / 512KByte
LED	• Power, Link/Act, WLAN, USB
Transport Protocol	• TCP/IP, SMB, NetBEUI, AppleTalk
TCP/IP Protocol Supported	• BOOTP, SNMP, Telnet, TFTP, FTP, LPD, RARP, DHCP, IPP
OS Support	• Windows 7(32/64-bit)/Vista(32/64-bit)/2003 Server/XP(32/64-bit)/2000/ME/98SE • Netware 5.x NDPS LPR Remote Printing (TCP/IP) • HP-UX Unix, Sun OS, Solaris, SCO Unix, AIX • Unixware, Linux & Mac OS 10.1~10.6
Management	• Windows Utility or Web-Browser Configuration
Power	• 5V DC 2.5A External Power Adapter
Dimensions/Weight	• 115 x 85 x 38mm (4.5 x 3.4 x 1.5 inches) /160 g (5.6oz.)
Temperature	• Operating: 0°~50°C (32°~122°F) • Storage: -25°~55°C (-13°~131°F)
Humidity	• Max. 90% (non-condensing)
Certification	• CE, FCC
Wireless	
Frequency	• 2.4 ~ 2.4835 GHz (Industrial Scientific Medical Band)
Encryption	• 64/128-Bit WEP (HEX/ASCII), WPA-PSK(TKIP)
Antenna	• 2dBi Detached Reverse-SMA (Female) Diversity Antenna
Data Rate (Auto Fallback)	• IEEE 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps • IEEE 802.11b: 11Mbps, 5.5Mbps, 2Mbps and 1Mbps (Auto Fallback)

NETWORKING SOLUTIONS

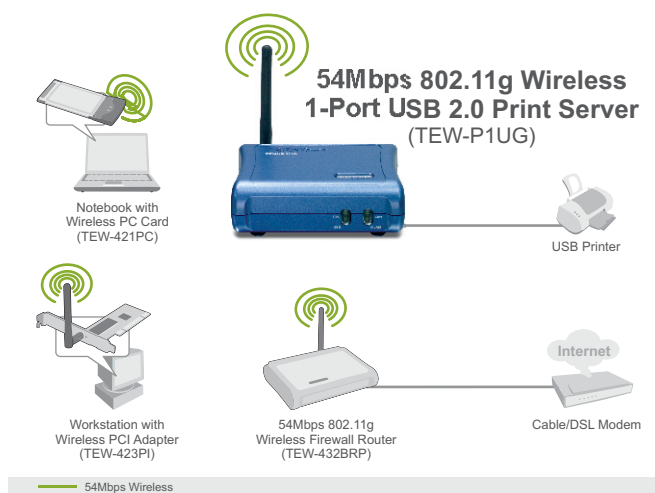

PACKAGE CONTENTS

- TEW-P1UG
- Quick Installation Guide
- Utility CD-ROM
- Power Adapter (5V DC, 2.4A)

RELATED PRODUCTS

TEW-P1PG	54Mbps 802.11g Wireless Parallel Print Server
TEW-P21G	54Mbps 802.11g Multi-Port Print Server 2 USB 2.0 & 1 Parallel Printer Port
TE100-P1U	10/100Mbps USB 2.0 Print Server

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

