



2-Port PS/2 KVM Switch Kit with Audio TK-208K (v1.3R)

The 2-Port PS/2 Audio KVM Switch Kit lets you control multimedia PCs with just one keyboard, monitor, mouse, microphone, and a set of speakers. The KVM switch not only allows you to share your monitor, keyboard and mouse but you can also share microphone and speakers. With just a simple press of a button, this KVM switch eliminates the hassle of cable swapping and switching between 2 PCs. With its Auto-Scan and Hot-Key operating features, the TK-208K is the perfect choice for managing 2 PCs. Separate KVM cables are included.

PRODUCT OVERVIEW

- 2-port KVM switch with VGA and PS/2 connections to computers and audio devices
- Listen to music from one computer while working on the other
- High quality 2048 x 1536 resolution for a crisp display
- All required cabling included

FEATURES

- Control up to 2 computers/servers with one set of console devices
- PS/2 keyboard/mouse emulation with 2 sets of detachable KVM cables
- Compliant with Windows and Linux
- High video quality, up to 2048 x 1536 resolution
- Listen to music from one computer while working on the other
- Auto-Scan and LED display for easy status monitoring
- Computer selection by face panel push buttons or keyboard hot key commands
- Keyboard status restored when switching between computers:
- Plug & Play
- 2-year limited warranty



SPECIFICATIONS

HARDWARE

Connection	• 2 Computers	
Cable	<ul style="list-style-type: none"> • 2 sets of 1.2 m/4 ft. KVM cable • 2 sets of 1.2 m/4 ft. audio cables (USB mini B to 3.5mm jack) 	
Cable Interface (all male)		To KVM
		To Computer
	KVM Cable	<ul style="list-style-type: none"> • 1 x VGA/SVGA HDB 15-pin
	Audio Cable	<ul style="list-style-type: none"> • 1 x PS/2 keyboard 6-pin mini-DIN • 1 x PS/2 mouse 6-pin mini-DIN • 1 x VGA/SVGA HDB 15-pin
		<ul style="list-style-type: none"> • 1 x 3.5 mm audio in / out jack • 1 x 3.5 mm microphone jack
PC Port Connectors (all female)	<ul style="list-style-type: none"> • 2 x VGA/SVGA HDB 15-pin • 2 x USB (mini B) 	
Console Port Connectors (all female)	<ul style="list-style-type: none"> • 1 x PS/2 keyboard 6-pin mini-DIN • 1 x PS/2 mouse 6-pin mini-DIN • 1 x VGA/SVGA HDB 15-pin • 1 x 3.5 mm audio in/out jack • 1 x 3.5 mm microphone in / out jack 	
Supported OS	• Windows Vista, XP, Server 2003, 2000, 98, DOS	
Computer Selection	• Face panel push buttons or keyboard hot-key commands	
Auto-Scan Interval	• 10 seconds	
Keyboard State	• Save and restore	
Power Type	• PS/2 interface power	
Dimensions	• 98 x 70 x 2.8 mm (3.86 x 2.76 x 1.1 in.)	
Weight	• 108 g (3.8 oz)	
Temperature	<ul style="list-style-type: none"> • Operating: 0°C ~ 40°C (32° F ~104°F) • Storage: -20°C ~ 60°C (-4°F ~140°F) 	
Humidity	• Max. 90% (non-condensing)	
Certifications	• CE, FCC	

2-Port PS/2 KVM Switch Kit with Audio


TK-208K (v1.3R)



NETWORKING SOLUTIONS

2-Port PS/2 KVM Switch Kit with Audio

TK-208K

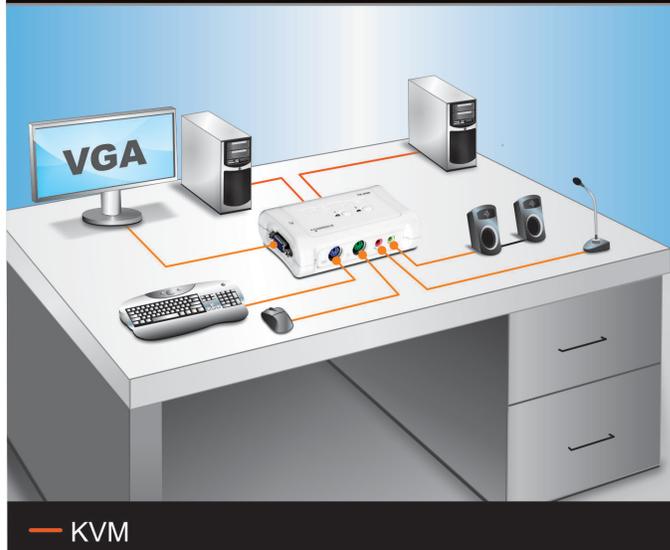

PACKAGE CONTENTS

TK-208K

Quick Installation Guide

2 sets of PS/2 KVM cables (1.2 m/4 ft.)

2 sets of audio cables (1.2 m/4 ft.)

RELATED PRODUCTS

TK-205K	2-Port PS/2 KVM Switch Kit
TK-209K	2-Port USB KVM Switch Kit with Audio
TK-408K	4-Port PS/2 KVM Switch Kit with Audio

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

