




2-Port Dual Monitor DisplayPort KVM Switch

TK-240DP (V3)

- Dual Monitor DisplayPort™ 1.2 KVM
- 3.5mm speaker and microphone connections
- Designed for use with Dual DisplayPort systems
- Supports 4K UHD resolutions up to 3840 x 2160 @ 60Hz
- Up to 2560 x 1440 @ 144Hz
- 2-Port USB 2.0 hub for storage devices and printers
- Required cabling (TK-CP06) sold separately
- No CD installation required
- NDAA / TAA compliant (U.S. and Canada only)

TRENDnet's 2-Port Dual Monitor DisplayPort KVM Switch, model TK-240DP, allows you to control two computers with one set of console controls. Experience up to 4K UHD resolutions, no driver installation required. The TK-240DP is designed for dual monitor systems with USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or printers between computers.

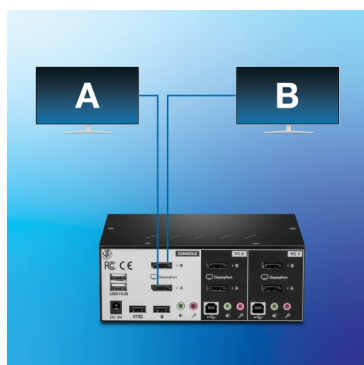

DisplayPort Monitor

Designed to connect to two DisplayPort monitors



4K UHD Resolution

Supports resolutions up to 4K UHD
(3840 x 2160 @ 60Hz)



USB 2.0 Hub

Two additional USB ports to connect
storage drives and printers

FEATURES



Computers

Control up to 2 computers



4K UHD

Supports resolutions up to 4K
UHD (3840 x 2160 @ 60Hz)



Audio Support

Full audio support maximizes
work station productivity



USB Mouse & Keyboard

True Transparent USB (TTU)
emulation technology supports
most keyboard and mouse
designs



DisplayPort Monitor

Designed to connect to
two DisplayPort monitors



Housing

Rugged metal enclosure



USB 2.0 Hub


Two additional USB ports to
connect storage drives and
printers



Hot Keys

Hot Key command shortcuts

NETWORKING SOLUTION

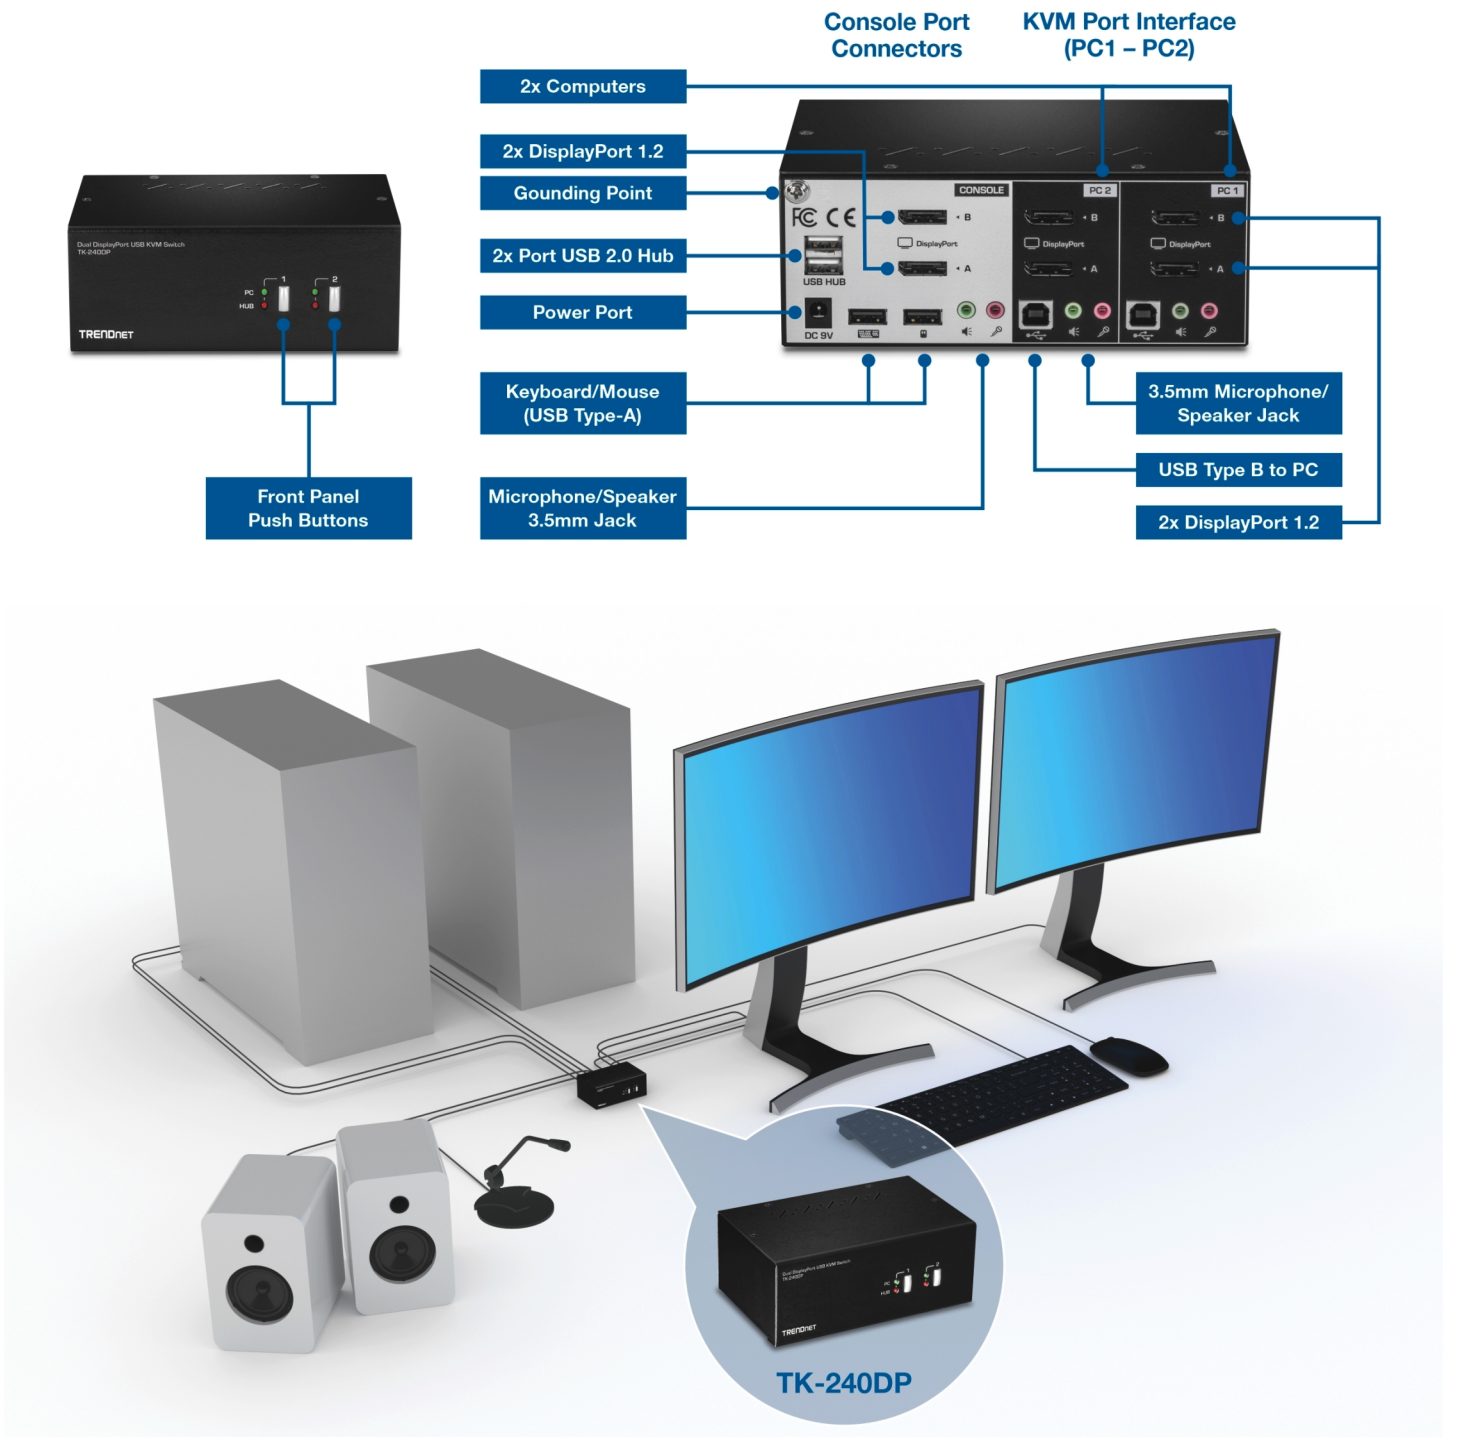

SPECIFICATIONS

Console Port Connectors

- Keyboard: USB Type A
- Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- 2-port USB 2.0 Hub
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

KVM Port Interface (up to 2)

- Keyboard/Mouse: USB Type B
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Computer Interface (up to 2)

- Keyboard/Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Monitor Resolution

- Up to 1920 x 1080 @ 144Hz
- Up to 1920 x 1200 @ 144Hz
- Up to 1920 x 1440 @ 144Hz
- Up to 2560 x 1440 @ 144Hz
- Up to 3440 x 1440 @ 60Hz
- Up to 3840 x 2160 @ 60Hz

Switching Control

- Front panel push buttons
- Keyboard hot key commands

Operating Temperature

- 0° – 40° C (32° – 104° F)

Operating Humidity

- Max. 90% non-condensing

Power

- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 2A external power adapter
- Max. consumption: 0.7W

Dimensions

- 163 x 100 x 66mm (6.4 x 3.9 x 2.6 in.)

Weight

- 750g (1.65 lbs.)

Certifications

- CE
- FCC

Warranty

- 2 year

Package Contents

- TK-240DP
- Quick Installation Guide
- Power adapter (9V DC, 2A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.