



## 2-Port Dual Monitor DisplayPort KVM Switch

TK-240DP (V3)

- Dual Monitor DisplayPort™ 1.2 KVM
- 3.5mm speaker and microphone connections
- Designed for use with Dual DisplayPort systems
- Supports 4K UHD resolutions up to 3840 x 2160 @ 60Hz
- Up to 2560 x 1440 @ 144Hz
- 2-Port USB 2.0 hub for storage devices and printers
- Required cabling (TK-CP06) sold separately
- No CD installation required
- NDAA / TAA compliant (U.S. and Canada only)

TRENDnet's 2-Port Dual Monitor DisplayPort KVM Switch, model TK-240DP, allows you to control two computers with one set of console controls. Experience up to 4K UHD resolutions, no driver installation required. The TK-240DP is designed for dual monitor systems with USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or printers between computers.



### DisplayPort Monitor

Designed to connect to two DisplayPort monitors



### 4K UHD Resolution

Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)



### USB 2.0 Hub

Two additional USB ports to connect storage drives and printers

## FEATURES



### Computers

Control up to 2 computers



### 4K UHD

Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)



### Audio Support

Full audio support maximizes work station productivity



### USB Mouse & Keyboard

True Transparent USB (TTU) emulation technology supports most keyboard and mouse designs



### DisplayPort Monitor

Designed to connect to two DisplayPort monitors



### Housing

Rugged metal enclosure



### USB 2.0 Hub


Two additional USB ports to connect storage drives and printers



### Hot Keys

Hot Key command shortcuts

## NETWORKING SOLUTION

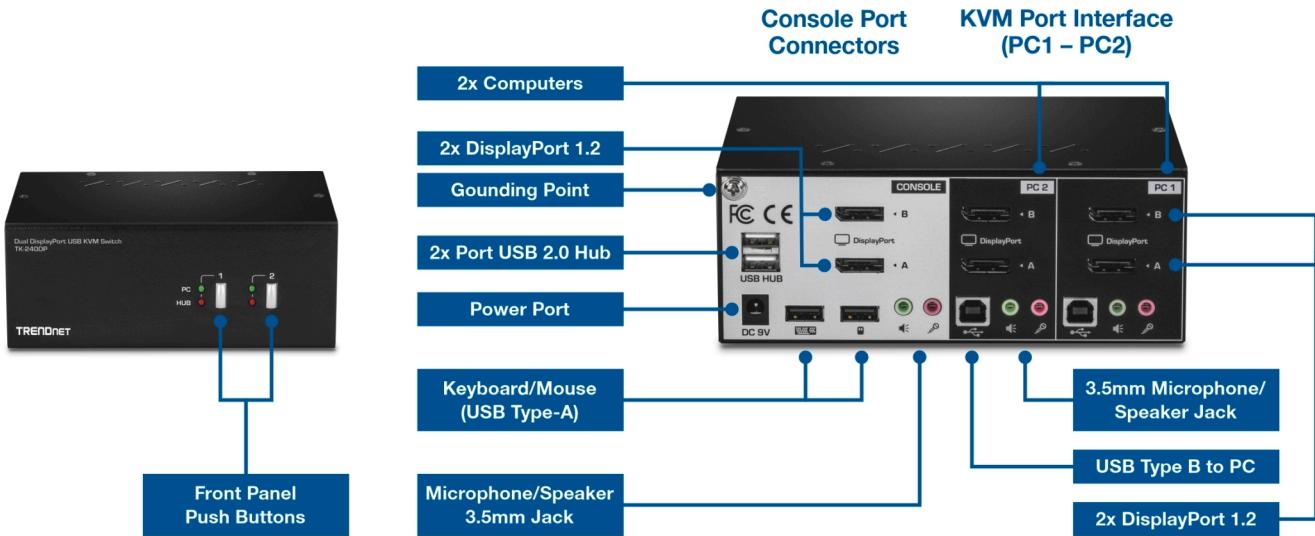

## SPECIFICATIONS

### Console Port Connectors

- Keyboard: USB Type A
- Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- 2-port USB 2.0 Hub
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### KVM Port Interface (up to 2)

- Keyboard/Mouse: USB Type B
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### Computer Interface (up to 2)

- Keyboard/Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### Monitor Resolution

- Up to 1920 x 1080 @ 144Hz
- Up to 1920 x 1200 @ 144Hz
- Up to 1920 x 1440 @ 144Hz
- Up to 2560 x 1440 @ 144Hz
- Up to 3440 x 1440 @ 60Hz
- Up to 3840 x 2160 @ 60Hz

### Switching Control

- Front panel push buttons
- Keyboard hot key commands

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 90% non-condensing

### Power

- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 2A external power adapter
- Max. consumption: 0.7W

### Dimensions

- 163 x 100 x 66mm (6.4 x 3.9 x 2.6 in.)

### Weight

- 750g (1.65 lbs.)

### Certifications

- CE
- FCC

### Warranty

- 2 year

### Package Contents

- TK-240DP
- Quick Installation Guide
- Power adapter (9V DC, 2A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.