




4-Port Dual Monitor DisplayPort KVM Switch

TK-440DP (V3)

- Dual Monitor DisplayPort™ 1.2 KVM
- 3.5mm speaker and microphone connections
- Designed for use with Dual DisplayPort systems
- Supports 4K UHD resolutions up to 3840 x 2160 @ 60Hz
- Up to 2560 x 1440 @ 144Hz
- 2-Port USB 2.0 hub for storage devices and printers
- Required cabling sold separately (TK-CP06)
- No CD installation required
- NDAA / TAA compliant (U.S. and Canada only)

TRENDnet's 4-Port Dual Monitor DisplayPort KVM Switch, model TK-440DP, allows you to control four computers with one set of console controls. Experience up to 4K UHD resolutions, no driver installation required. The TK-440DP is designed for dual monitor systems with USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or printers between computers.

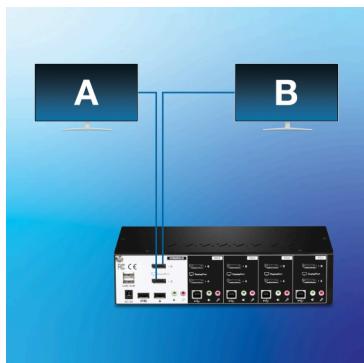

Dual Monitor

Designed to connect to two DisplayPort monitors.



4K UHD Resolution

Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz).



USB 2.0 Hub

Two additional USB ports to connect storage drives and printers.

FEATURES



4-Port Dual Monitor KVM

Control up to four computers with dual monitor support



DisplayPort Monitor

Designed to connect to two DisplayPort monitors



4K UHD

Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)



Audio Support

Full audio support maximizes work station productivity



USB Mouse & Keyboard

True Transparent USB (TTU) emulation technology supports most keyboard and mouse designs



Housing

Rugged metal enclosure



USB 2.0 Hub

Two additional USB ports to connect storage drives and printers



Hot Keys


Hot Key command shortcuts



Easy Installation

Simple setup with driverless installation

NETWORKING SOLUTION

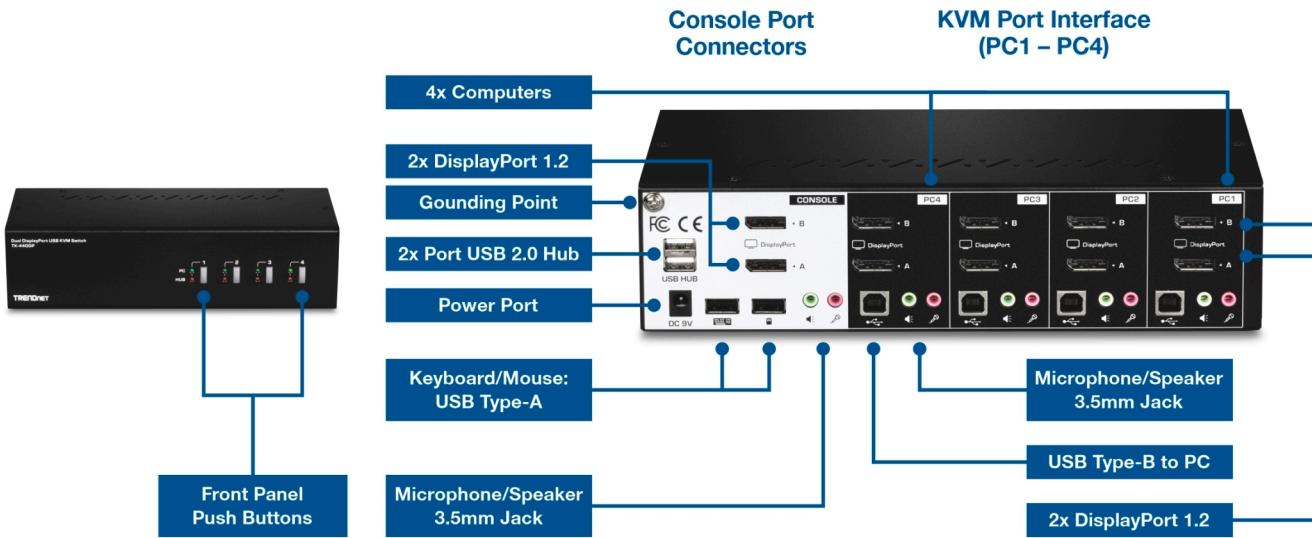

SPECIFICATIONS

Console Port Connectors

- Keyboard: USB Type A
- Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- 2-port USB 2.0 Hub
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

KVM Port Interface

- Keyboard/Mouse: USB Type B
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Computer Interface (up to 4)

- Keyboard/Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Monitor Resolution

- Up to 1920 x 1080 @ 144Hz
- Up to 1920 x 1200 @ 144Hz
- Up to 1920 x 1440 @ 144Hz
- Up to 2560 x 1440 @ 144Hz
- Up to 3440 x 1440 @ 60Hz
- Up to 3840 x 2160 @ 60Hz

Switching Control

- Front panel push buttons
- Keyboard hot key commands

Operating Temperature

- 0° – 40° C (32° – 104° F)

Operating Humidity

- Max. 90% non-condensing

Power

- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 2A external power adapter
- Max. consumption: 0.7W

Dimensions (L x W x H)

- 254 x 100 x 66mm (10 x 3.9 x 2.6 in.)

Weight

- 1.2kg (2.7 lbs.)

Warranty

- 2 year

Certifications

- CE
- FCC

Package Contents

- TK-440DP
- Quick Installation Guide
- Power adapter (9V DC, 2A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.