



8-Port 10/100Mbps PoE Fast Ethernet Switch

TPE-S44 (A2.1R)

TPE-S44 8-Port Switch integrates Power over Ethernet (PoE) and network management features into a cost effective and scalable solution. The TPE-S44 reduces equipment cost by delivering data and power over existing network cable infrastructure.

FEATURES

- IEEE 802.3af Power over Ethernet (PoE) Standard Compliant
- 8 x 10/100Mbps Auto-Negotiation and Auto-MDIX Fast Ethernet RJ45 Ports
- Built-in 4 PoE Ports (Port 1 ~ Port 4)
- Supports PoE Power Maximum 15.4 watts for each POE port
- Supports PoE Powered Device(PD) classification identify
- Full Wire-Speed Non-Blocking Reception and Transmission
- Store and Forward Switching Method
- 96Kbytes RAM Data Buffer and 1K entries MAC Address Table
- Extensive Diagnostic LED's on the Front Panel
- IEEE 802.3x Flow Control for Full-Duplex Mode; Back Pressure Flow Control for Half-Duplex Mode
- 3-Year Warranty

8-Port 10/100Mbps PoE Fast Ethernet Switch

TPE-S44 (A2.1R)



SPECIFICATIONS


HARDWARE

Standard	<ul style="list-style-type: none"> • IEEE 802.3 10Base-T • IEEE802.3u 100Base-TX • IEEE 802.3af Power over Ethernet
Network Media	<ul style="list-style-type: none"> • 10Mbps: Cat 3,4,5 Unshielded Cable • 100Mbps: Cat 5, 5E, 6 Unshielded Cable
Protocol / Topology	<ul style="list-style-type: none"> • CSMA/CD ; Star
Ports	<ul style="list-style-type: none"> • 4 x 10/100Mbps Auto-MDIX POE Ports (1~4) • 4 x 10/100Mbps Auto-MDIX Fast Ethernet Ports (5 ~8)
Data Transfer Rate	<ul style="list-style-type: none"> • Ethernet: 10/20Mbps (half/full duplex) • Fast Ethernet: 100/200Mbps (half/full duplex)
RAM Buffer / Filtering	<ul style="list-style-type: none"> • 96 Kbytes / 1K entry per device
Power	<ul style="list-style-type: none"> • 48V DC 1.25A External Power Adapter
Diagnostic LEDs	<ul style="list-style-type: none"> • Per Unit: Power, Power MAX • Per Port: Link/Activity, Speed • PoE: PoE Status, Link/Activity, Speed
Power Consumption	<ul style="list-style-type: none"> • 6.3 watts max (no PD Device connected) • 36.3 watts max (with 30w PoE Device connected)
Switch Fabric	<ul style="list-style-type: none"> • 1.6 Gbps forwarding capacity
Temperature	<ul style="list-style-type: none"> • Operating: 0° ~ 40° C (32° ~ 104°F) • Storage: -10° ~ 70° C (14° ~ 158°F)
Humidity	<ul style="list-style-type: none"> • 10%- 90% (non-condensing)
Dimensions	<ul style="list-style-type: none"> • 171 x 98 x 29mm (6.7 x 3.7 x 1.1in.)
Weight	<ul style="list-style-type: none"> • 430g (13.8oz.)
Certification	<ul style="list-style-type: none"> • FCC, CE

PoE

Power over Ethernet	<ul style="list-style-type: none"> • Up to 15.4 watts per Port; PD classification Identify • PoE Over Current Protection; PoE Circuit Sorting Protection • PoE Power on RJ-45 pin 3,6 for Power+ and pin 1,2 for Power
----------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

NETWORKING SOLUTIONS

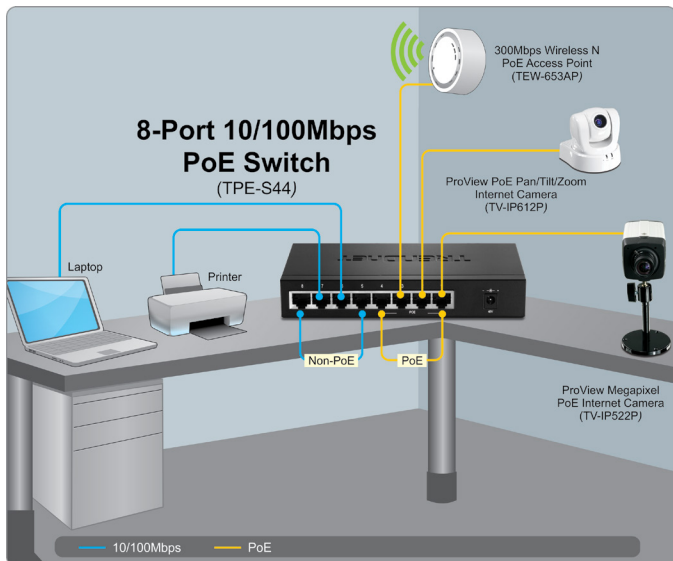

PACKAGE CONTENTS

TPE-S44
Multi-Language Quick Installation Guide
Power Adapter (48V DC, 1.25A)

RELATED PRODUCTS

TPE-111GI	Gigabit Power over Ethernet (PoE) Injector
TPE-112GS	Gigabit Power over Ethernet (PoE) Splitter
TPE-80WS	8-Port Gigabit Web Smart PoE Switch
TPE-224WS	24-Port 10/100Mbps Web Smart PoE Switch with 4 Gigabit Ports and 2 Mini-GBIC Slots

CONTACT INFORMATION



20675 Manhattan Place, Torrance, CA 90501 USA
 Tel: 1-310-961-5500
 Fax: 1-310-961-5511
 Web: www.trendnet.com
 Email: sales@trendnet.com
1-888-326-6061

